

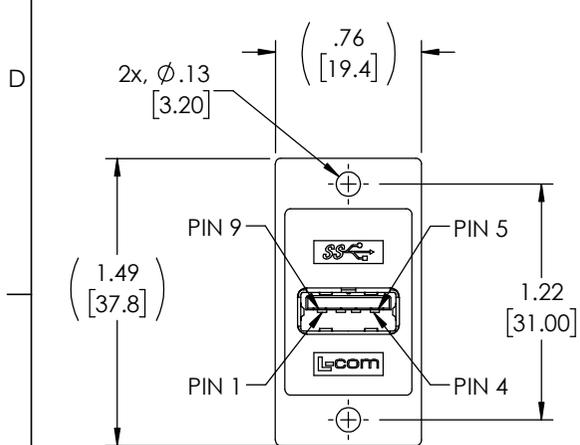


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/16/2021	D.GUTTADAURO





"J1"
USB 3.0 TYPE "A"
FEMALE CONNECTOR
30u" GOLD PLATED CONTACTS
NICKEL PLATED SHELL

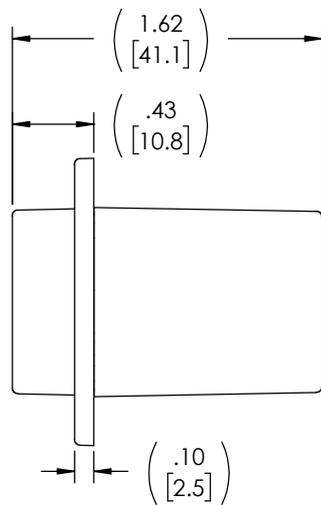

ABS COUPLER SHIELDED HOUSING,
FINISH: CHROME




"J2"
USB 3.0 TYPE "A"
FEMALE CONNECTOR
30u" GOLD PLATED CONTACTS
NICKEL PLATED SHELL

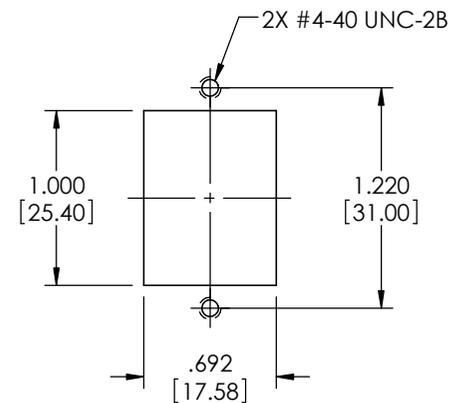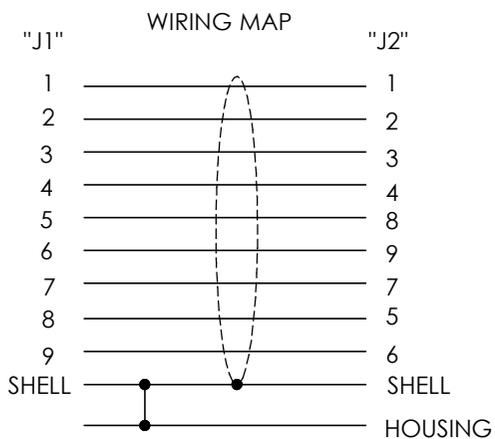

RECOMMENDED
PANEL CUTOUT

- RATING**
CURRENT: 1.8A (P1 and P4 CONTACT); 0.25A(OTHER CONTACTS)
VOLTAGE: 30V max.
OPERATING TEMPERATURE: -10°C TO +70°C.
- TYPE "A" CONNECTOR MATING FORCE: 40N Max.**
UN-MATING FORCE: 15N Min.
- COUPLER SHALL BE TESTED FOR CONTINUITY.**
- COUPLER SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPEC PS-0031.**

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: $\le 12 [305] = +1 [25] / -0$ $> 12 [305] \le 60 [1524] = +2 [51] / -0$ $> 60 [1524] \le 120 [3048] = +4 [102] / -0$ $> 120 [3048] \le 300 [7620] = +6 [152] / -0$ $> 300 [7620] = +5\% / -0$	APPROVALS	DATE	 an INFINITI® brand 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	DRAWN BY B.ZHANG	01/11/2021	
ALL OTHER DIMENSIONAL TOLERANCES: .X \pm .2 [5] FRACTIONS .XX \pm .02 [5] \pm 1/32 .XXX \pm .005 [13] ANGLES \pm 1°	CHECKED BY D.GUTTADAURO	01/11/2021	PRODUCT DESCRIPTION USB 3.0 CPLR, HI-RETENTION PNL MNT A-F/A-F SHLD
THIRD-ANGLE PROJECTION	APPROVED BY D.GUTTADAURO	01/11/2021	SIZE A
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	CAGE CODE 43321
			DWG. NO. ECF504-30-UAAS-HR
			SCALE: NONE
			CAD FILE: ECF504-30-UAAS-HR.SLDDRW
			SHEET 1 OF 1