

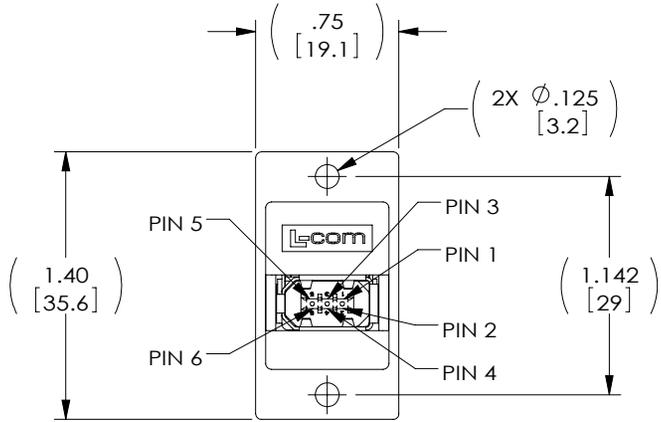


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN7356; UPDATED DIMENSIONS, LOGO, RoHS, OPERATING TEMPERATURE.	03/27/2014	B.ZHANG
F	ECN7681; CHANGE CONTACT PLATING FROM 30u" GOLD TO GOLD FLASH	11/19/2014	B.ZHANG

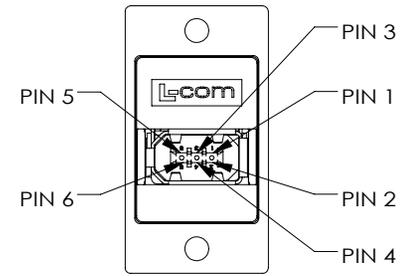

2X FIREWIRE 1394
6 PIN JACK
"J1"

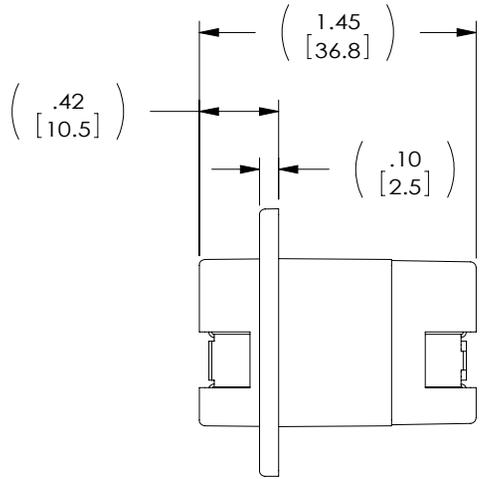

"J2"

NOTES:

MATERIAL:
 COUPLER HOUSING: ABS, UL94V-0.
 CONNECTOR INSULATORS: BLACK, PBT WITH GLASS FIBER.
 CONNECTOR CONTACTS: BRASS.
 CONNECTOR SHELL: BRASS.
 PCB: EPOXY GLASS FP-4, 94V-0 FLAMMABILITY RATING.



FINISH:
 COUPLER HOUSING: CHROME.
 CONNECTOR CONTACTS: GOLD FLASH.
 CONNECTOR SHELLS: NICKEL.

ELECTRICAL:
 CURRENT RATING: 2 AMP MAX.
 VOLTAGE RATING: 140 VDC.

ENVIRONMENTAL:
 OPERATING TEMPERATURE: -20° C TO +60° C.

MISCELLANEOUS:
 COUPLER SHALL BE TESTED FOR CONTINUITY.
 COUPLER SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPEC PS-0031.

WIRING MAP

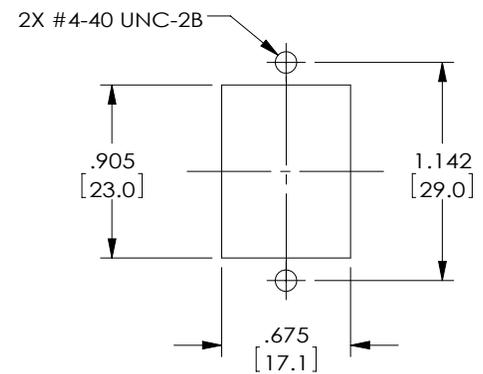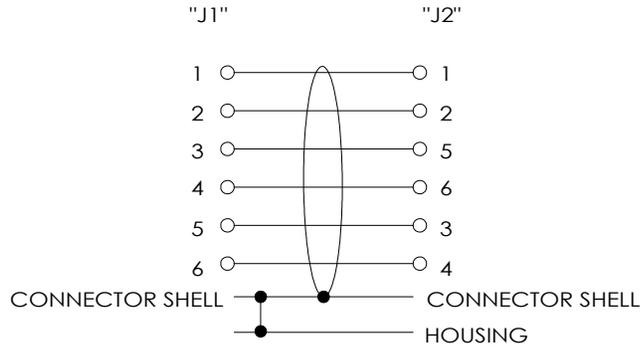

RECOMMENDED
PANEL CUTOUT

REGULATORY COMPLIANCE:
 CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE	L-com Global Connectivity 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY C. MCCORMICK	1/13/2002	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CHECKED BY D. PARHAM	1/13/2002	CATEGORY FIREWIRE
	APPROVED BY R. CARRICK	1/13/2002	PRODUCT DESCRIPTION CPLR PNL MNT FIREWIRE 1/1 SHIELDED
PROJECTION	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A
			FSCM NO. 43321
			DWG. NO. ECF504-94MS
			REV. F
			SCALE: NONE
			CAD FILE: ECF504-94MS.SLDDRW
			SHEET 1 OF 1