


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.





RoHS Compliant ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	12/8/11	D.GRIFFIN
B	ECN5990: 2 MOUNTING SCREWS WERE 1 PACKAGE OF SCREWS	02/22/12	DFP
C	ECN6435: ADDED ROHS STAMP	09/28/12	DFP
D	ECN 6492: CHANGED NOTE TO 'TDG1026KCS-R5E' WITHOUT PKG. UPD LOGO	10/29/12	D. DESJARDIN

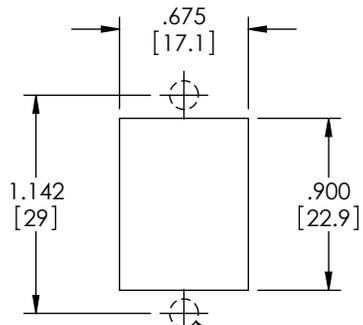


2X #4-40 UNC-2B THRU

RECOMMENDED
PANEL OPENING

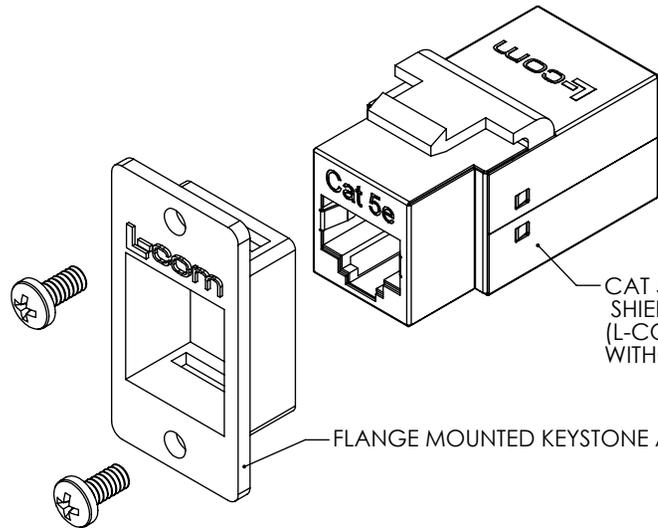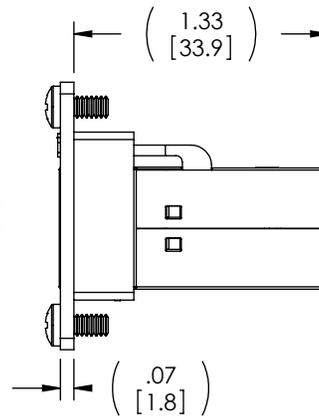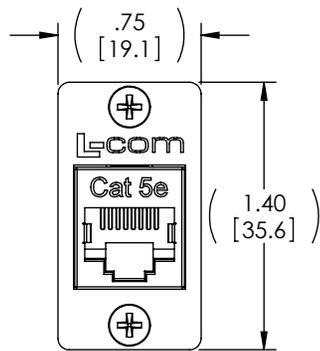

CAT 5E RIGHT ANGLE RJ45
SHIELDED COUPLER
(L-COM P/N TDG1026KCS-R5E
WITHOUT PACKAGING)

FLANGE MOUNTED KEYSTONE ADAPTOR

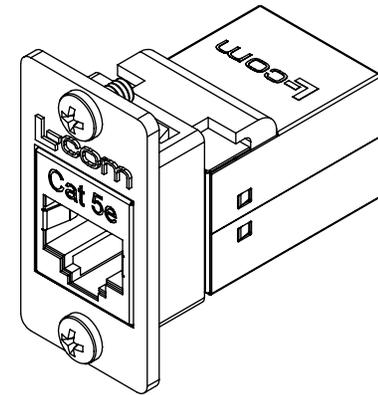

KIT SHOWN FULLY ASSEMBLED FOR CLARITY
(KIT IS SHIPPED UN-ASSEMBLED)

KIT INCLUDES:
1- COUPLER
1- FLANGE ADAPTOR
2- #4-40 x 1/4" MOUNTING SCREWS

NOTES:

MATERIAL:
FLANGED ADAPTOR: ZINC ALLOY
HARDWARE: STAINLESS STEEL

FINISH:
FLANGED ADAPTOR: NICKEL PLATE

KIT IS PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D. PARHAM	12/07/2011		CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005	CHECKED BY D. FRISIELLO	12/07/2011	PRODUCT DESCRIPTION	
PROJECTION 	APPROVED BY D. GALLAGHER	12/07/2011	CPLR RJ45 F-F CAT5E SHIELDED RA	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A	FSCM NO. 43321
	COLOR VARIATIONS MAY OCCUR		DWG. NO. ECF504-SR5E	REV. D
			SCALE: NONE	CAD FILE: ECF504-SR5E.SLDDRW
				SHEET 1 OF 1