
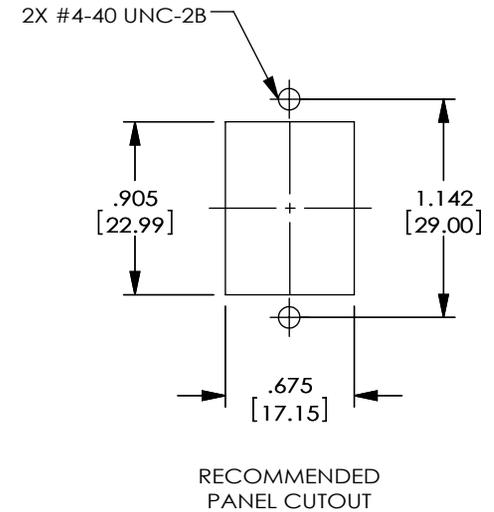

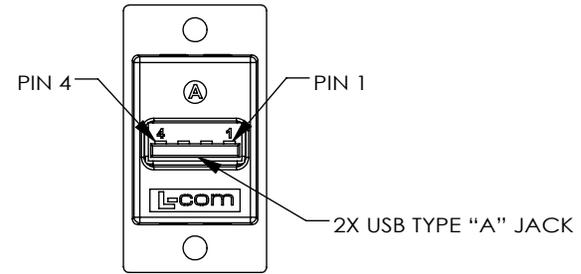
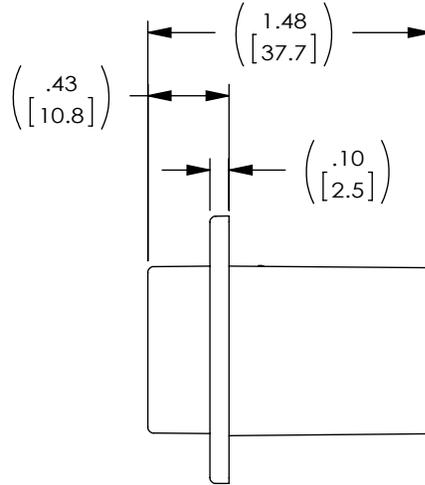


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	2/2/12	D.GRIFFIN
B	ECN 6458: USE NEW LOGO, REVISE DIM TO .43	10/12/12	D.FRISIELLO
C	ECN 6692: ADDED BOTTOM VIEW FOR CLARITY.	2/21/13	D.FRISIELLO
D	ECN 8409: UPDATE TEMPERATURE RATING TO -10-70°C	7/15/16	S.LI

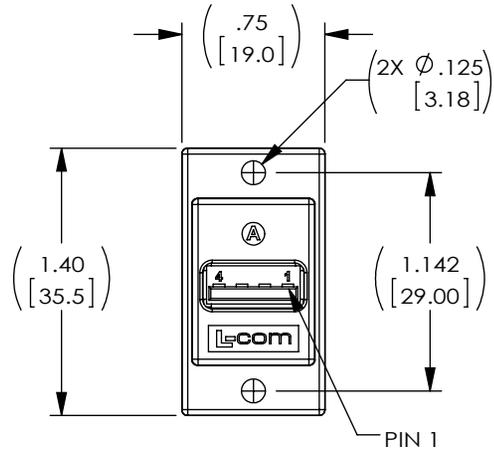

NOTES:

MATERIAL:

COUPLER HOUSING: ABS, UL94V-0.
 CONNECTOR PLASTIC: PBT WITH GLASS FIBER
 CONNECTOR CONTACTS: BRASS
 CONNECTOR SHELL: BRASS
 PCB: EPOXY GLASS FP-4, 94V-0 FLAMMABILITY RATING

FINISH:

COUPLER HOUSING: BLACK
 CONNECTOR CONTACTS: GOLD, 30μ INCHES
 CONNECTOR SHELL: NICKEL

ELECTRICAL:

CURRENT RATING: 2 AMP MAX.
 VOLTAGE RATING: 140 VDC.

ENVIRONMENTAL:

OPERATING TEMPERATURE: -10°C TO +70°C




MISCELLANEOUS:

COUPLER SHALL BE TESTED FOR CONTINUITY.
 COUPLER SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

CE2011/65/EU (RoHS DIRECTIVE)

WIRING MAP

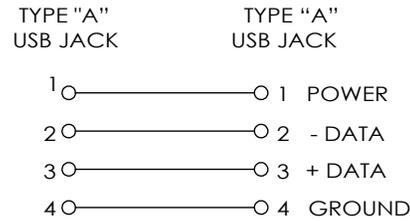

CONNECTOR SHELL ————— CONNECTOR SHELL

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [1.51] .XXX = ±.005 [1.3]	APPROVALS D.FRISIELLO CHECKED BY F.MAO APPROVED BY S.SMITH	DATE 1/11/12 1/11/12 1/11/12		50 HIGH STREET NORTH ANDOVER, MA 01845	
	CATEGORY USB		PRODUCT DESCRIPTION CPLR PNL MNT USB A/A BLK		
	PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321
	DWG. NO. ECF504B-UAA		REV. D	SCALE: NONE CAD FILE: ECF504B-UAA.SLDDRW SHEET 1 OF 1	