



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
E	ECN 7253: REMOVED GOLD PLATE VALUE, REVISED DIMS. FORMAT	1/20/14	D.FRISIELLO

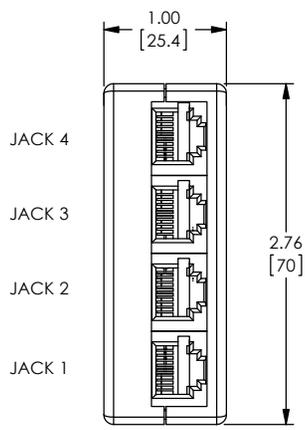


4X, RJ45
KEYED JACK
(8X8)

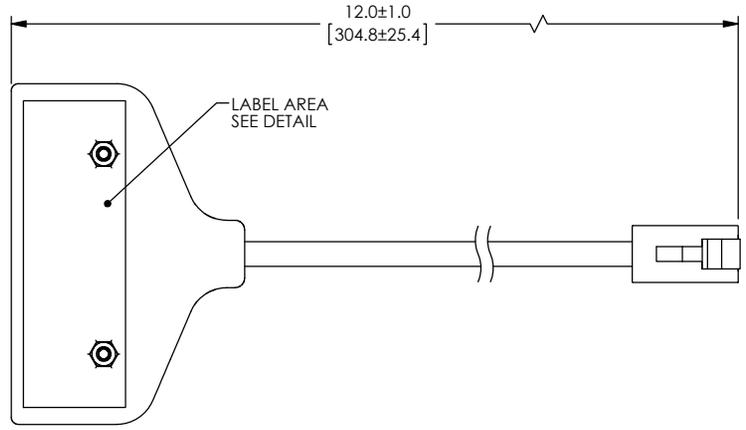

LABEL AREA
SEE DETAIL

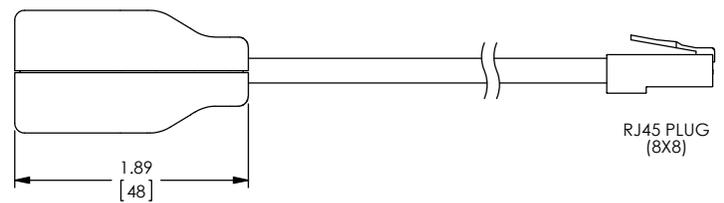

RJ45 PLUG
(8X8)

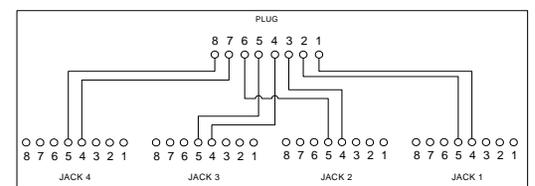

LABEL DETAIL
AND WIRING DIAGRAM


NOTES:
MATERIALS:
 PLUG: POLYCARBONATE, UL94V-1
 CONTACTS: PHOSPHOR BRONZE WITH GOLD PLATE ON CONTACT SURFACES.
 JACKS HOUSING: ABS PLASTIC, DARK GRAY, UL94V-0.
 HOUSING FINISH: #27 CHARMILLES.
 CONTACTS: PHOSPHOR BRONZE WITH GOLD PLATE ON CONTACT SURFACES.

CABLE: UNSHIELDED CATEGORY 3 OR BETTER
 4 TWISTED PAIRS, 24 AWG STRANDED COPPER
 UL LISTED COMMUNICATION CABLE, TYPE CM
 JACKET: PVC, GRAY

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.
 CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.

CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 CE2011/65/EU(RoHS DIRECTIVE)

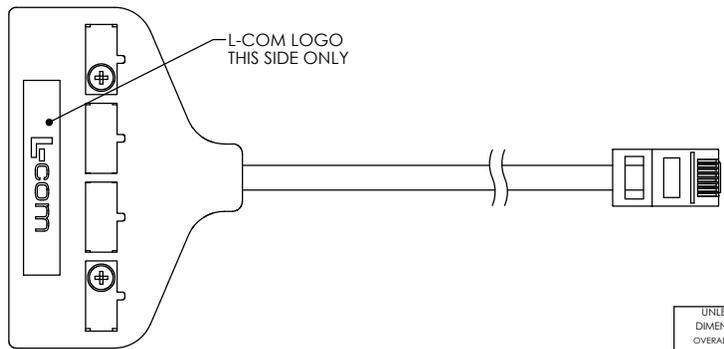

L-COM LOGO
THIS SIDE ONLY

UNLESS OTHERWISE SPECIFIED,
 DIMENSIONS ARE IN INCHES (mm)
 OVERALL CABLE LENGTH TOLERANCE:
 ≤12 (305) ±.05 (+.05) / -0
 >12 (305) ≤60 (1524) = +.05(1) / -0
 >60 (1524) ≤120 (3048) = +.1(2) / -0
 >120 (3048) ≤300 (7620) = +.1(2) / -0
 >300 (7620) = +.15 / -0
 ALL OTHER DIMENSIONAL TOLERANCES:
 X = ±.2 (5.08)
 XX = ±.02 (51)
 XXX = ±.005 (127)

APPROVALS	DATE
DRAWN BY D. PARHAM	9/3/2003
CHECKED BY T. CLARK	9/18/2003
APPROVED BY C. MCCORMICK	9/18/2003

L-com Global Connectivity 45 BEECHWOOD DRIVE
 NORTH ANDOVER, MA 01845

CATEGORY TELECOM/MODULAR

PRODUCT DESCRIPTION TIA568 SPLTR 8X8 PLG/4(8X2)JKS

SIZE	PSCM NO.	DWG. NO.	REV.
B	43321	ECS403-12	E

SCALE: 1:1.5 CAD FILE: EC3403-12.SLDRW SHEET 1 OF 1

