


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


RoHS Compliant ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/12/10	D.GRIFFIN
B	ECN 5868: ADDED LENGTHS 03 M, 075 M	12/2/11	D.FRISIELLO
C	ECN 6451: UPDATED LOGOS AND NOTES	10/10/12	D. DESJARDIN


($\triangle C$)
 (2X .463
 [11.75]
 MIN.)

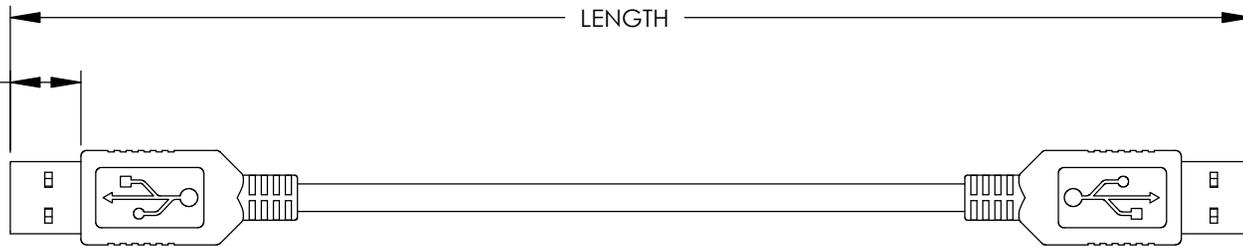

"P1" PIN 1
 DIELECTRIC
 2X, SERIES "A" USB PLUG CONTACTS: 30 μINCHES GOLD PLATING




"P2" PIN 1
 DIELECTRIC

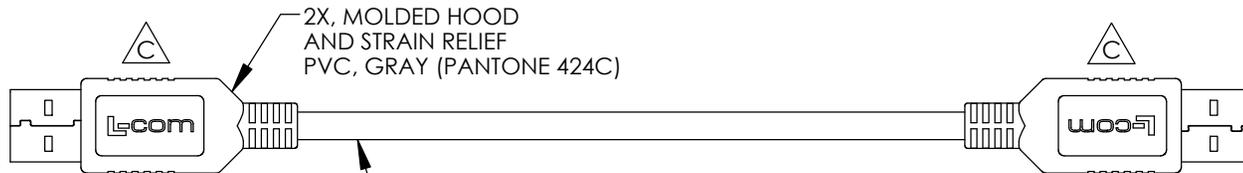

ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR
 TWO 26AWG STRANDED TINNED COPPER CONDUCTORS
 OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN WIRE
 PLUS TINNED COPPER BRAID SHIELD.
 PVC OUTER JACKET, GRAY (PANTONE 424C)

MODEL NUMBER	LENGTH METERS [FEET]
ECUSBAA-03M	0.3 [.98]
ECUSBAA-05M	0.5 [1.64]
ECUSBAA-075M	0.75 [2.46]
ECUSBAA-1M	1.0 [3.28]
ECUSBAA-2M	2.0 [6.56]
ECUSBAA-3M	3.0 [9.84]
ECUSBAA-4M	4.0 [13.12]
ECUSBAA-5M	5.0 [16.41]

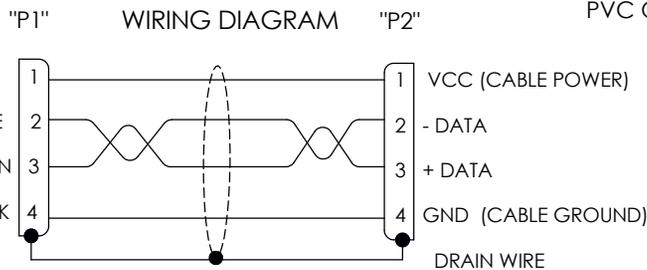

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D. CASTRO CHECKED BY D. PARHAM APPROVED BY S. SMITH	11/11/10 11/12/10 11/12/10	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION CBL, USB A/A 28/26	
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE A FSCM NO. 43321 DWG. NO. ECUSBAA REV. C	SCALE: NONE CAD FILE: ECUSBAA.SLDDRW SHEET 1 OF 1