
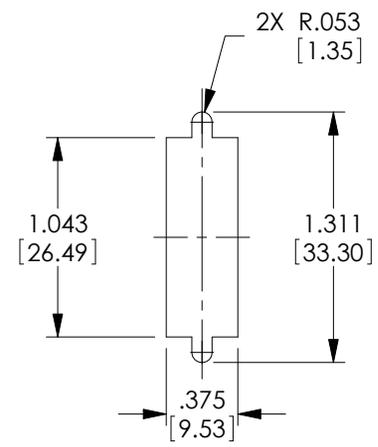
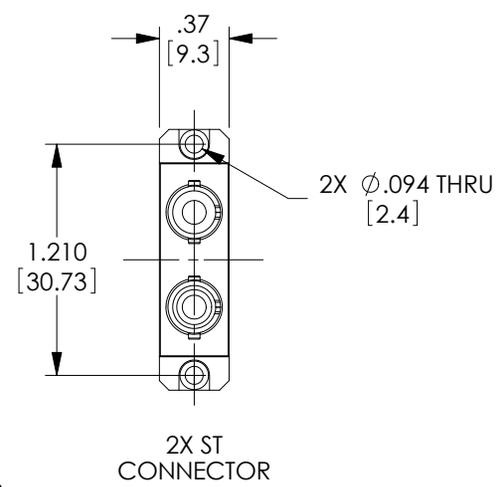
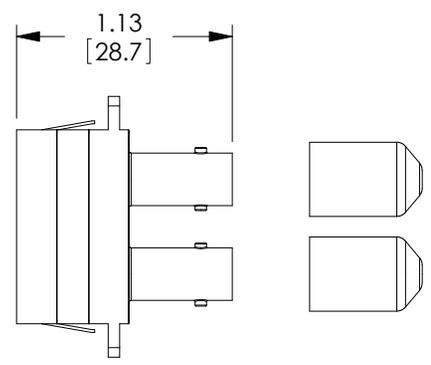


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	DRAWING REPLACES FOA-006-OD1	9/29/14	D.FRISIELLO

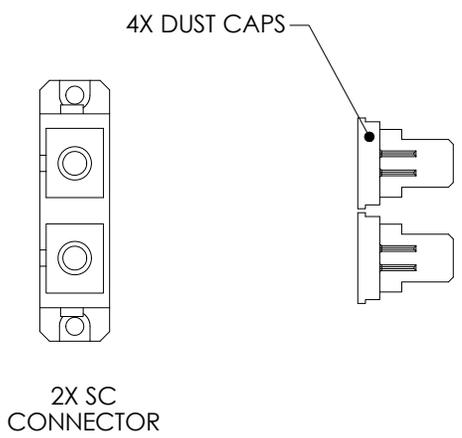

NOTES:

MATERIALS:

- SLEEVE: CERAMIC
- ST BODY: PBT +15% GLASS FIBER
- ST DUST CAP: PVC
- SPRING LEVER: PBT +30% GLASS FIBER
- MOUNTING CLIPS: STAINLESS STEEL
- SC BODY: PBT +15% GLASS FIBER
- SC DUST CAP: ABS

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY C.MCCORMICK	12/26/2000		
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [5.1] .XXX = ±.005 [1.3]	CHECKED BY D.PARHAM	01/10/2001	CATEGORY FIBER OPTICS	
	APPROVED BY R.CARRICK	01/10/2001	PRODUCT DESCRIPTION SC TO ST DUPLEX ADAPTER	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321
			DWG. NO. FOA-006	REV. A
			SCALE: NONE	CAD FILE: FOA-006.SLDDRW
				SHEET 1 OF 1