


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/5/14	D.GRIFFIN
B	ECN 7679: ADDED COLOR CHART	11/14/14	D.FRISIELLO

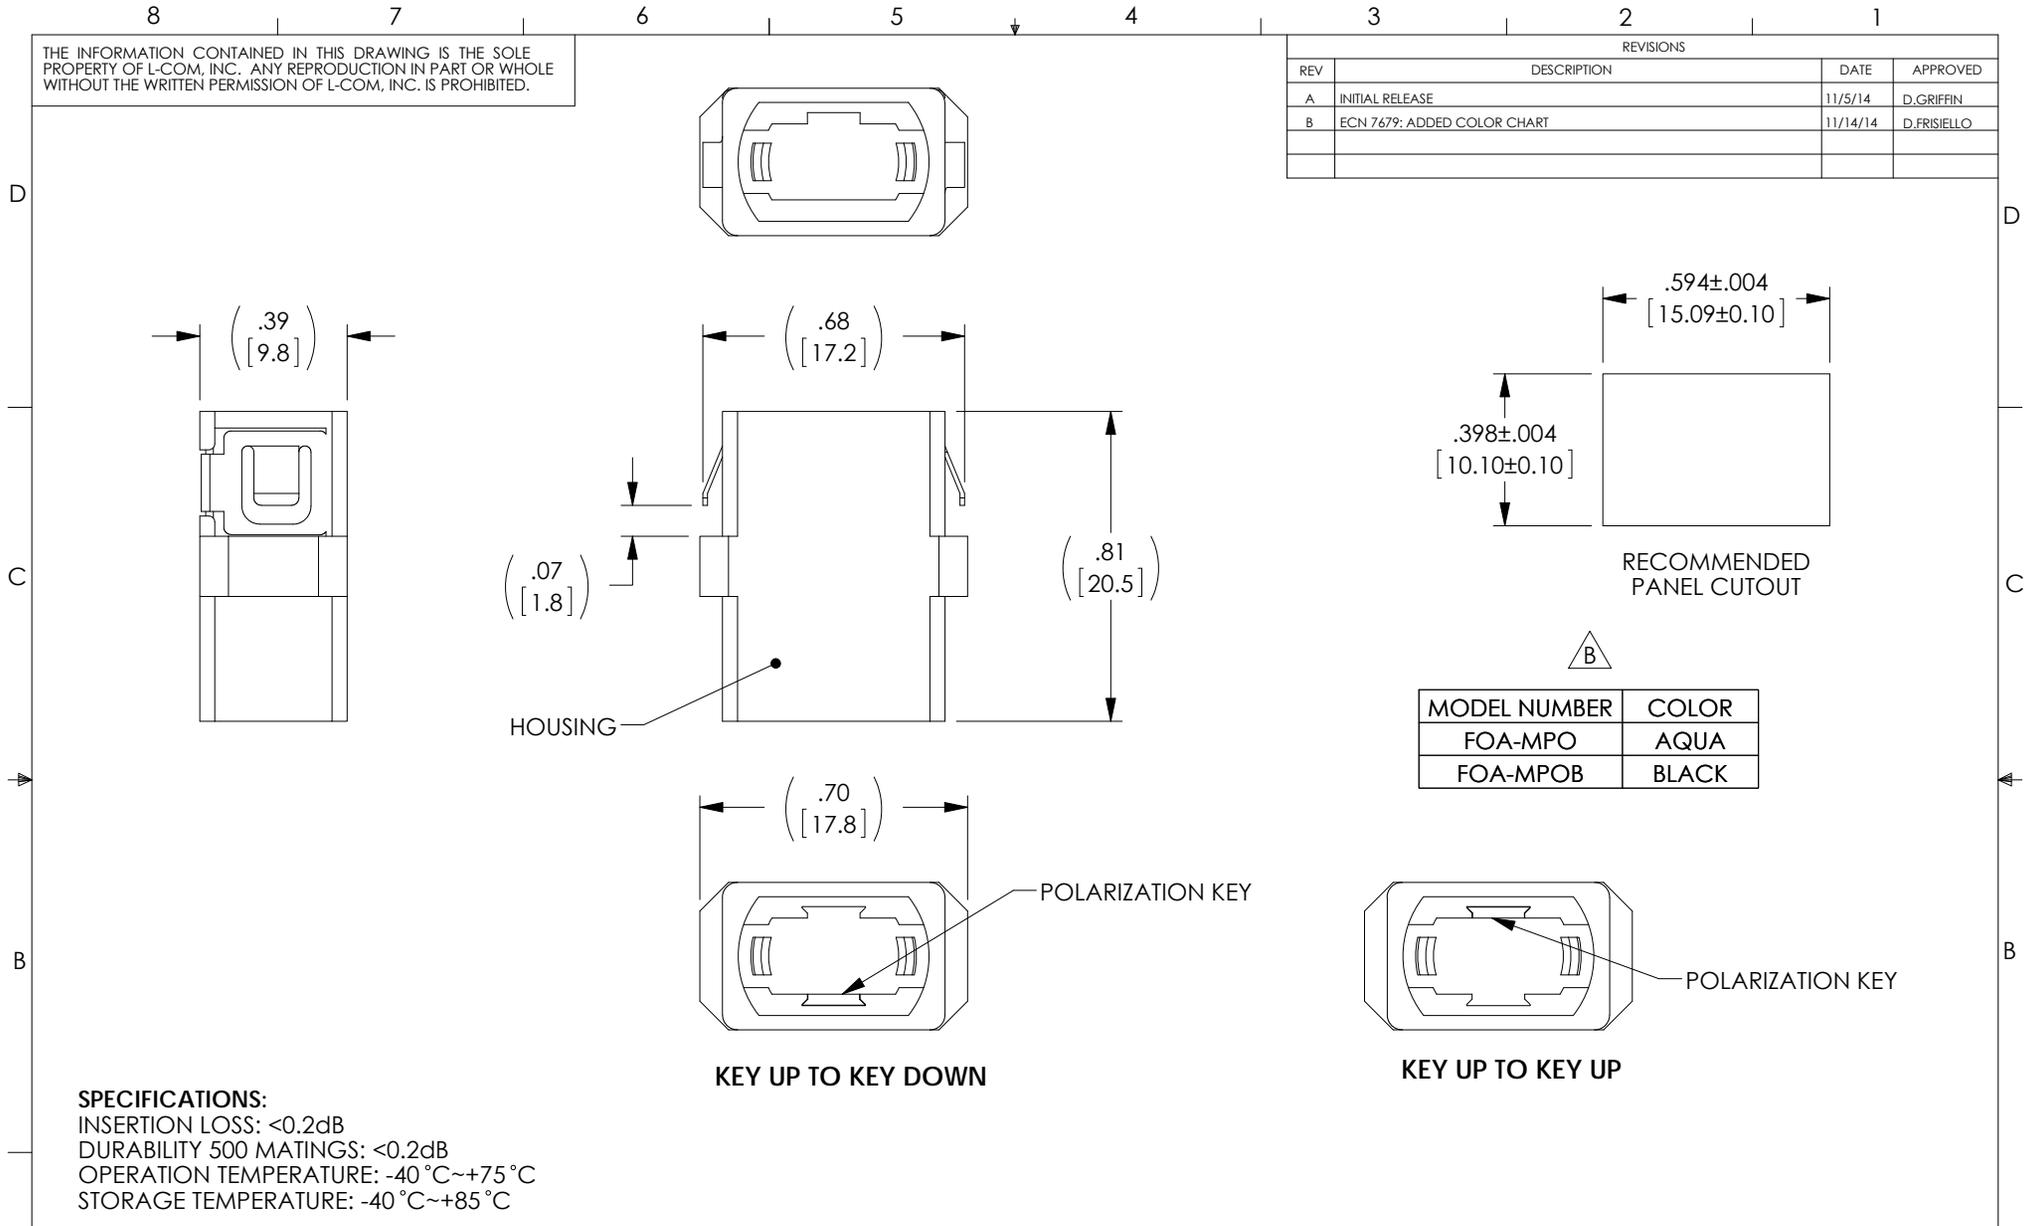

MODEL NUMBER	COLOR
FOA-MPO	AQUA
FOA-MPOB	BLACK

SPECIFICATIONS:

INSERTION LOSS: <0.2dB
 DURABILITY 500 MATINGS: <0.2dB
 OPERATION TEMPERATURE: -40 °C~+75 °C
 STORAGE TEMPERATURE: -40 °C~+85 °C

MISCELLANEOUS:

THIS COMPONENT WILL SHIP IN THE KEY UP TO KEY DOWN CONFIGURATION.
 POLARIZATION KEY ALLOWS KEYWAY CHANGE EASILY.
 RECOMMENDED PANEL THICKNESS .062 MAX.
 DUST CAPS INSTALLED FOR SHIPPING (NOT SHOWN).
 COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		
	DRAWN BY D. CASTRO	11/4/14		CATEGORY FIBER OPTICS		
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ± .005 [1.13]	CHECKED BY D. GUITADAURO	11/4/14		PRODUCT DESCRIPTION MPO COUPLER, KEYWAY CONVERTIBLE		
	APPROVED BY D. GALLAGHER	11/4/14			<table border="1"> <tr> <td>SIZE A</td> <td>FSCM NO. 43321</td> <td>DWG. NO. FOA-MPO</td> <td>REV. B</td> </tr> </table>	SIZE A
SIZE A	FSCM NO. 43321	DWG. NO. FOA-MPO	REV. B			
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SCALE: NONE	CAD FILE: FOA-MPO.SLDDRW	SHEET 1 OF 1	