





THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	7/31/12	D.GRIFFIN
B	ECN 6319; ADDED NOTE 1 -CRUCH RESISTANCE	8/2/12	D.FRISIELLO
C	ECN 6418; CHANGED CRUSH RESISTANCE FROM 1000 TO 800 PSI	9/19/12	D. DESJARDIN
D	ECN 9020; REVISED NOTES TO REMOVE HDMI LABEL, NEW DWG FORMAT	12/22/2017	B.ZHANG



2X HDMI MALE
19 PIN CONNECTOR
GOLD PLATED CONTACTS

WIRE MAP

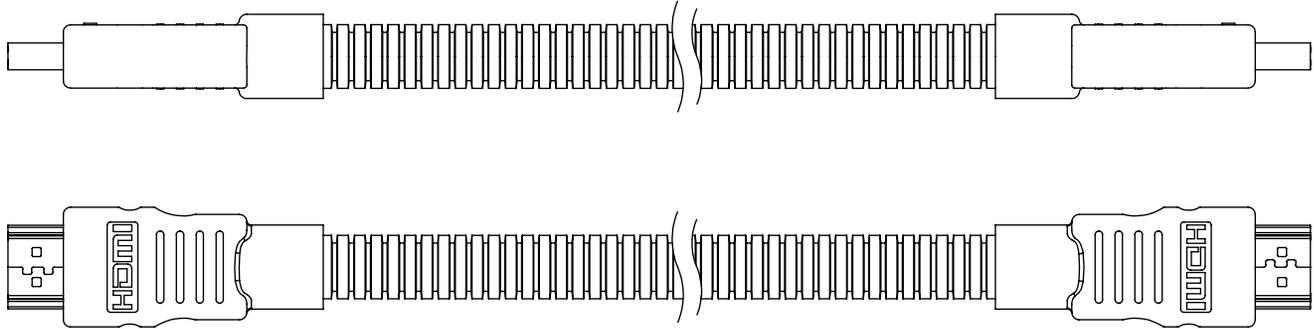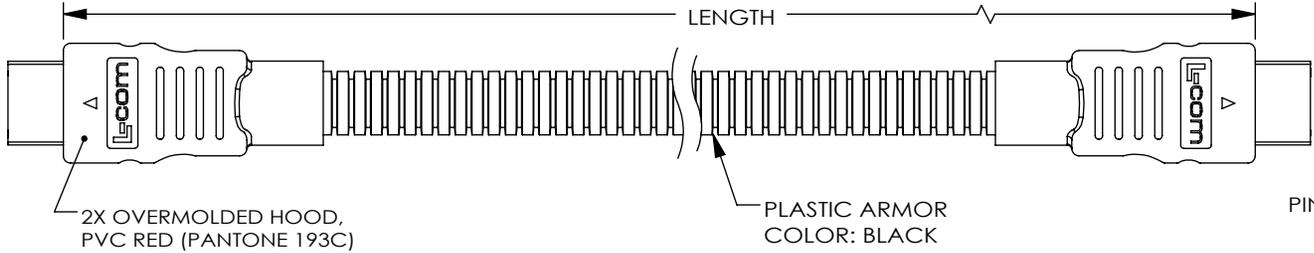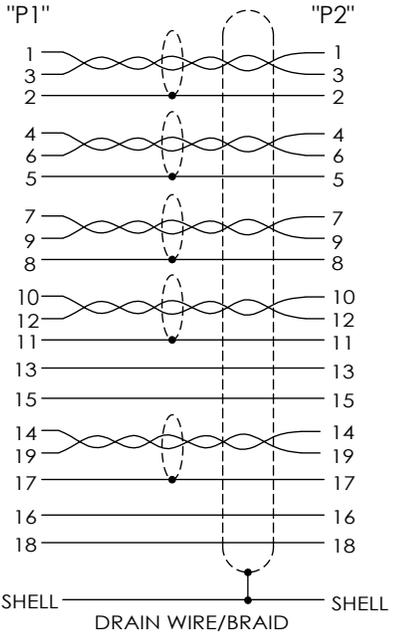

PART NUMBER	LENGTH	
	METERS	FEET
HDCAPL-0.5	0.5	1.64
HDCAPL-1	1.0	3.28
HDCAPL-2	2.0	6.56
HDCAPL-3	3.0	9.84
HDCAPL-4	4.0	13.12
HDCAPL-5	5.0	16.40

CABLE:
UL STYLE 20276,
(5) INDIVIDUALLY SHIELDED TWISTED PAIRS, 28AWG, WITH DRAIN WIRE,
(4) INDIVIDUAL CONDUCTORS, 28AWG,
OVERALL SHIELD: ALUMINUM MYLAR PLUS BRAIDED TINNED COPPER,
OUTER JACKET: PVC, BLACK

- NOTES:**
1. PLASTIC CRUSH RESISTANCE: 800 PSI (MIN.)
 2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPEC. PS-0031.
 4. DUST COVERS INSTALLED FOR SHIPPING (NOT SHOWN).

REGULATORY COMPLIANCE:
CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY D. PARHAM	10/18/2011		CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2[5.08] .XX = ± .02[.51] .XXX = ±.005[.13]	CHECKED BY D. FRISIELLO	12/12/2011	PRODUCT DESCRIPTION	CA HDMI PLAST ARMOR
PROJECTION	APPROVED BY S.SMITH	12/12/2011	SIZE	FSCM NO.
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		A	43321
	COLOR VARIATIONS MAY OCCUR		DWG. NO.	HDCAPL
			SCALE: NONE	CAD FILE: HDCAPL.SLDDRW
				SHEET 1 OF 1