


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	8/20/13	D.GRIFFIN
B	ECN 7513: REVISED CONNECTOR DESCRIPTION	7/11/14	D. CASTRO
C	ECN 8448: REMOVED 3M LENGTH, REVISED TO NEW VENDOR SPEC.	8/15/16	D.FRISIELLO

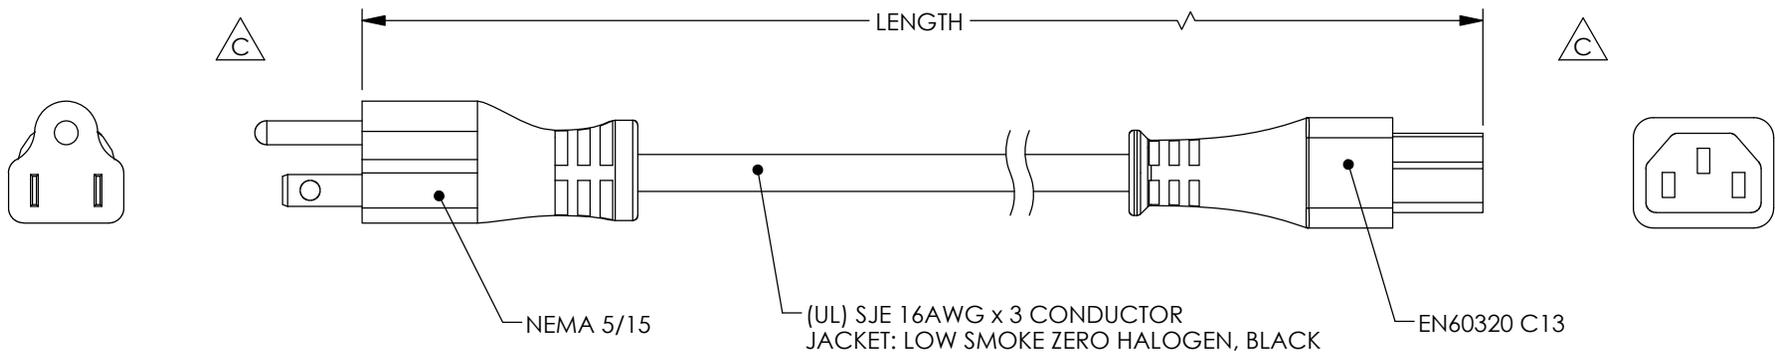

MODEL NUMBER	LENGTH METERS [FEET]
LCPWR16Z-2M	2.0 [6.56]

Detachable Power Supply Cord  
P/N: LCPWR16Z-2M  
UL File#E234956  
PLUG: 738 / CONNECTOR: 544  
Cable type: SJE3X16AWG 90°C  
Rating: 13A/125V  
Length: 2 meters/6'7"  
Color: Black  
Qty: 1

BAG LABEL EXAMPLE

**NOTES:**

1. RATED 13A/125V.
2. UL LISTED
3. CORD TO BE PLACED IN A CLEAR BAG WITH WHITE LABEL: SEE BAG LABEL EXAMPLES
4. CENTER THE LABEL ON THE CLEAR BAG.

**REGULATORY COMPLIANCE:**

CE2011/65/EU(RoHS DIRECTIVE)  
COMPLIES WITH IEC 61034-2 (LOW SMOKE)  
COMPLIES WITH EN 14582 (HALOGEN FREE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: $\leq 12$ [305] = +1 [25] / -0 $>12$ [305] $\leq 60$ [1524] = +2 [51] / -0 $>60$ [1524] $\leq 120$ [3048] = +4 [102] / -0 $>120$ [3048] $\leq 300$ [7620] = +6 [152] / -0 $>300$ [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [5.1] .XXX = ±.005 [1.3]	APPROVALS DRAWN BY D.FRISIELLO CHECKED BY E.LAMOTT APPROVED BY M.MARTINEZ	DATE 8/20/13 8/20/13 8/20/13	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845			
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			CATEGORY <b>POWER PRODUCTS</b>		
	PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>LCPWR16Z</b>	REV. <b>C</b>
	SCALE: NONE		CAD FILE: LCPWR16Z.SLDDRW		SHEET 1 OF 1	