


8 7 6 5 4 3 2 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/18/14	D.GRIFFIN

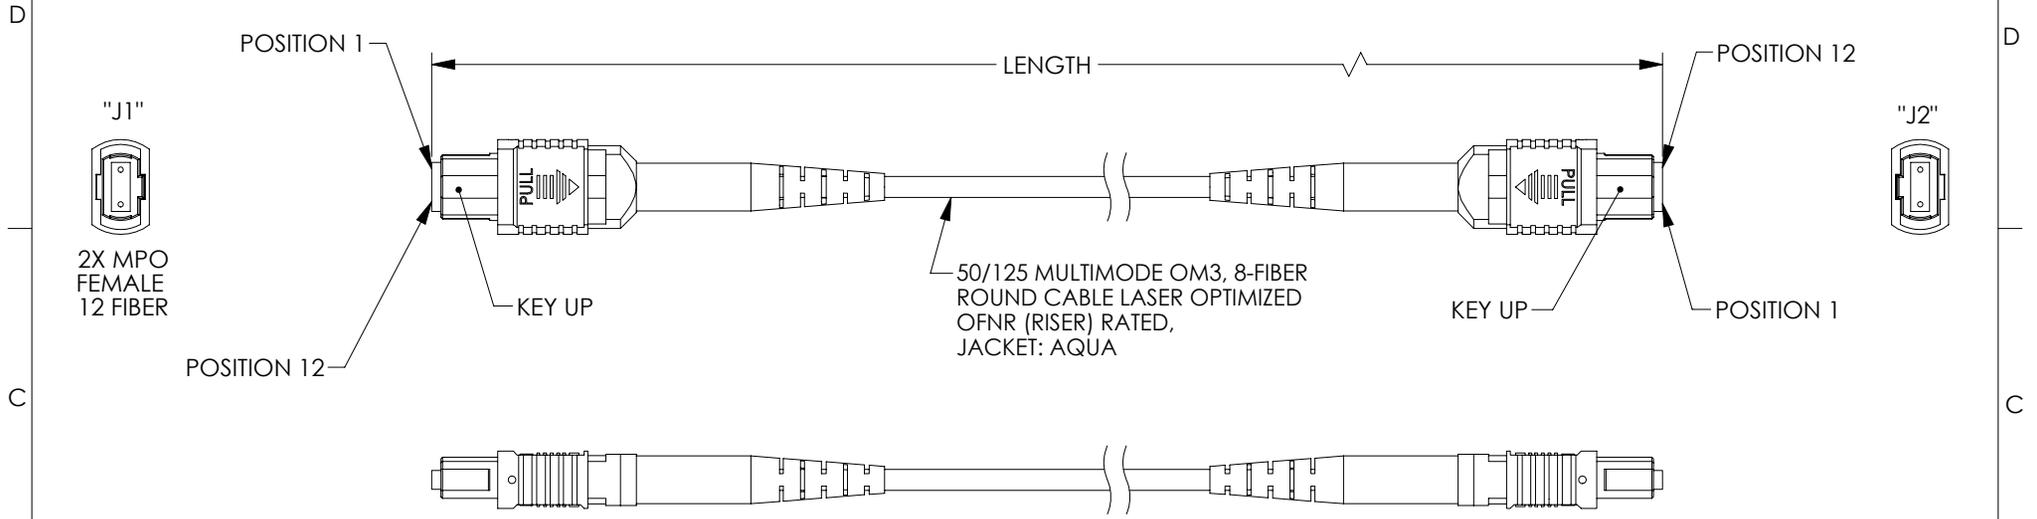

WIRE MAP		
"J1"	CABLE BUFFER COLOR	"J2"
1	BLUE	12
2	ORANGE	11
3	GREEN	10
4	BROWN	9
5	NOT USED	8
6	NOT USED	7
7	NOT USED	6
8	NOT USED	5
9	YELLOW	4
10	VIOLET	3
11	ROSE	2
12	AQUA	1

PART NUMBER	LENGTH METERS [FEET]
MPFF40G-01	1.0 [3.28]
MPFF40G-02	2.0 [6.56]
MPFF40G-03	3.0 [9.84]
MPFF-40G-05	5.0 [16.40]

- NOTES:**
- CONNECTOR ASSEMBLY POLISH TYPE: UPC
  - INSERTION LOSS: < 0.5dB
  - ALL CONNECTORS ACCOMPANIED WITH A DUST CAP INSTALLED (NOT SHOWN).
  - CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D. CASTRO	3/14/14		CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [5.1] .XXX = ±.005 [1.3]	CHECKED BY D. FRISIELLO	3/17/14	PRODUCT DESCRIPTION	
PROJECTION	APPROVED BY D. GALLAGHER	3/18/14	8-RND 40G MPO-FF OFR AQUA	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE <b>A</b>	FSCM NO. <b>43321</b>
	COLOR VARIATIONS MAY OCCUR		DWG. NO. MPFF40G	REV. <b>A</b>
			SCALE: NONE	CAD FILE: MPFF40G.SLDDRW
				SHEET 1 OF 1