


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
G	ECN 5256: ADDED WIRING MAP, NEW DRAWING FORMAT, ADDED NOTE 3	1/13/11	D.FRISIELLO
H	ECN 6706: ADDED TABLE FOR NEW FIBER MODE P/N'S, ADDED SM WIRE MAP.	3/4/13	D_DESJARDIN
J	ECN 7107: ADDED JACKET TYPE TO CHART, REMOVED ALL OM4 P/N'S, UPD ROHS	10/17/13	D.FRISIELLO

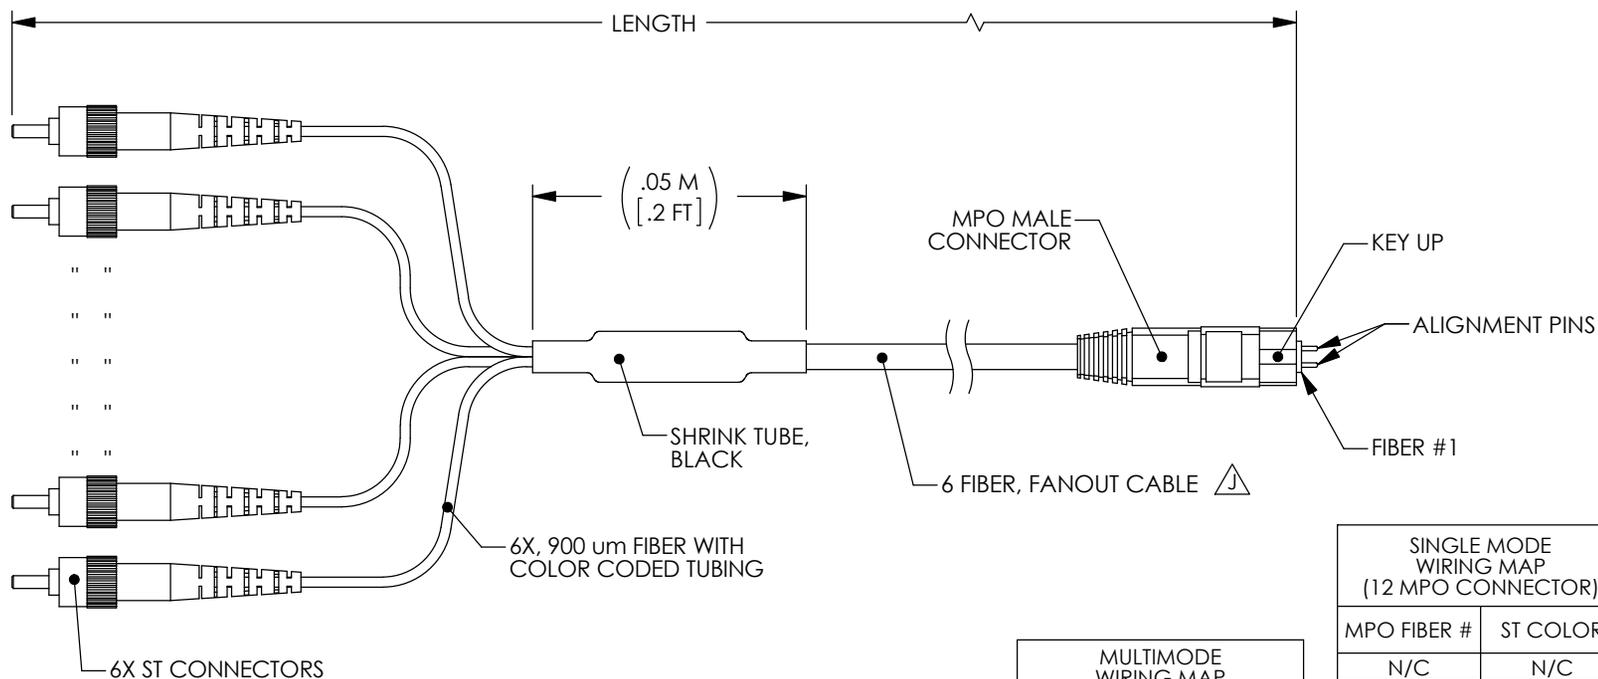

SINGLE MODE WIRING MAP (12 MPO CONNECTOR)	
MPO FIBER #	ST COLOR
N/C	N/C
N/C	N/C
N/C	N/C
4	BLUE
5	ORANGE
6	GREEN
7	BROWN
8	GRAY
9	WHITE
N/C	N/C
N/C	N/C
N/C	N/C

MULTIMODE WIRING MAP (8 MPO CONNECTOR)	
MPO FIBER #	LC COLOR
N/C	N/C
2	BLUE
3	ORANGE
4	GREEN
5	BROWN
6	GRAY
7	WHITE
N/C	N/C

NOTES:
 1. SEE SHEET 2 FOR PART NUMBERS, FIBER MODES, JACKET TYPES, COLORS, AND LENGTHS.

- MPO CONNECTOR MULTIMODE ASSEMBLY POLISH TYPE: UPC
 MPO CONNECTOR SINGLE MODE ASSEMBLY POLISH TYPE: APC
 ST CONNECTOR ASSEMBLY POLISH TYPE: PC
- ALL CONNECTORS ACCOMPANIED WITH A DUST CAP INSTALLED (NOT SHOWN).
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ±.005 [1.13]	APPROVALS	DATE	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845								
	DRAWN BY C.MCCORMICK	04/08/2002		CATEGORY FIBER OPTICS							
PROJECTION 	CHECKED BY D.PARHAM	04/08/2002	PRODUCT DESCRIPTION 6 RBN FNOUT CBL,MTP(M)/ST								
	APPROVED BY R.CARRICK	04/08/2002	<table border="1"> <tr> <th>SIZE</th> <th>FSCM NO.</th> <th>DWG. NO.</th> <th>REV.</th> </tr> <tr> <td>A</td> <td>43321</td> <td>MTPM06-ST</td> <td>J</td> </tr> </table>	SIZE	FSCM NO.	DWG. NO.	REV.	A	43321	MTPM06-ST	J
SIZE	FSCM NO.	DWG. NO.	REV.								
A	43321	MTPM06-ST	J								
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SCALE: NONE CAD FILE: MTPM06-ST.SLDRW SHEET 1 OF 2								
	COLOR VARIATIONS MAY OCCUR										

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



PART NUMBER	FIBER MODE	JACKET TYPE	COLOR	METERS [FEET]
MTPM06-ST-01	62.5/125 MULTIMODE OM1	OFNR (RISER) RATED	ORANGE	1.0 [3.28]
MTPM06-ST-05	62.5/125 MULTIMODE OM1	OFNR (RISER) RATED	ORANGE	5.0 [16.40]
MTPM06-ST-10	62.5/125 MULTIMODE OM1	OFNR (RISER) RATED	ORANGE	10.0 [32.81]
MPM6OM2-ST-05	50/125 MULTIMODE OM2	OFNR (RISER) RATED	ORANGE	0.5 [1.64]
MPM6OM2-ST-1	50/125 MULTIMODE OM2	OFNR (RISER) RATED	ORANGE	1.0 [3.28]
MPM6OM2-ST-5	50/125 MULTIMODE OM2	OFNR (RISER) RATED	ORANGE	5.0 [16.40]
MPM6OM2-ST-10	50/125 MULTIMODE OM2	OFNR (RISER) RATED	ORANGE	10.0 [32.81]
MPM6OM3-ST-05	50/125 MULTIMODE OM3	OFNR (RISER) RATED	AQUA	0.5 [1.64]
MPM6OM3-ST-1	50/125 MULTIMODE OM3	OFNR (RISER) RATED	AQUA	1.0 [3.28]
MPM6OM3-ST-5	50/125 MULTIMODE OM3	OFNR (RISER) RATED	AQUA	5.0 [16.40]
MPM6OM3-ST-10	50/125 MULTIMODE OM3	OFNR (RISER) RATED	AQUA	10.0 [32.81]
MPM6S-ST-05	9/125 SINGLE MODE OS1	OFNR (RISER) RATED	YELLOW	0.5 [1.64]
MPM6S-ST-1	9/125 SINGLE MODE OS1	OFNR (RISER) RATED	YELLOW	1.0 [3.28]
MPM6S-ST-5	9/125 SINGLE MODE OS1	OFNR (RISER) RATED	YELLOW	5.0 [16.40]
MPM6S-ST-10	9/125 SINGLE MODE OS1	OFNR (RISER) RATED	YELLOW	10.0 [32.81]

		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
CATEGORY: FIBER OPTICS			
PRODUCT DESCRIPTION: 6 RBN FNOUT CBL,MTP(M)/ST			
SIZE: A	FSCM NO.: 43321	DWG. NO.: MTPM06-ST	REV.: J
SCALE: NONE CAD FILE: MTPM06-ST.SLDDRW			SHEET 2 OF 2