

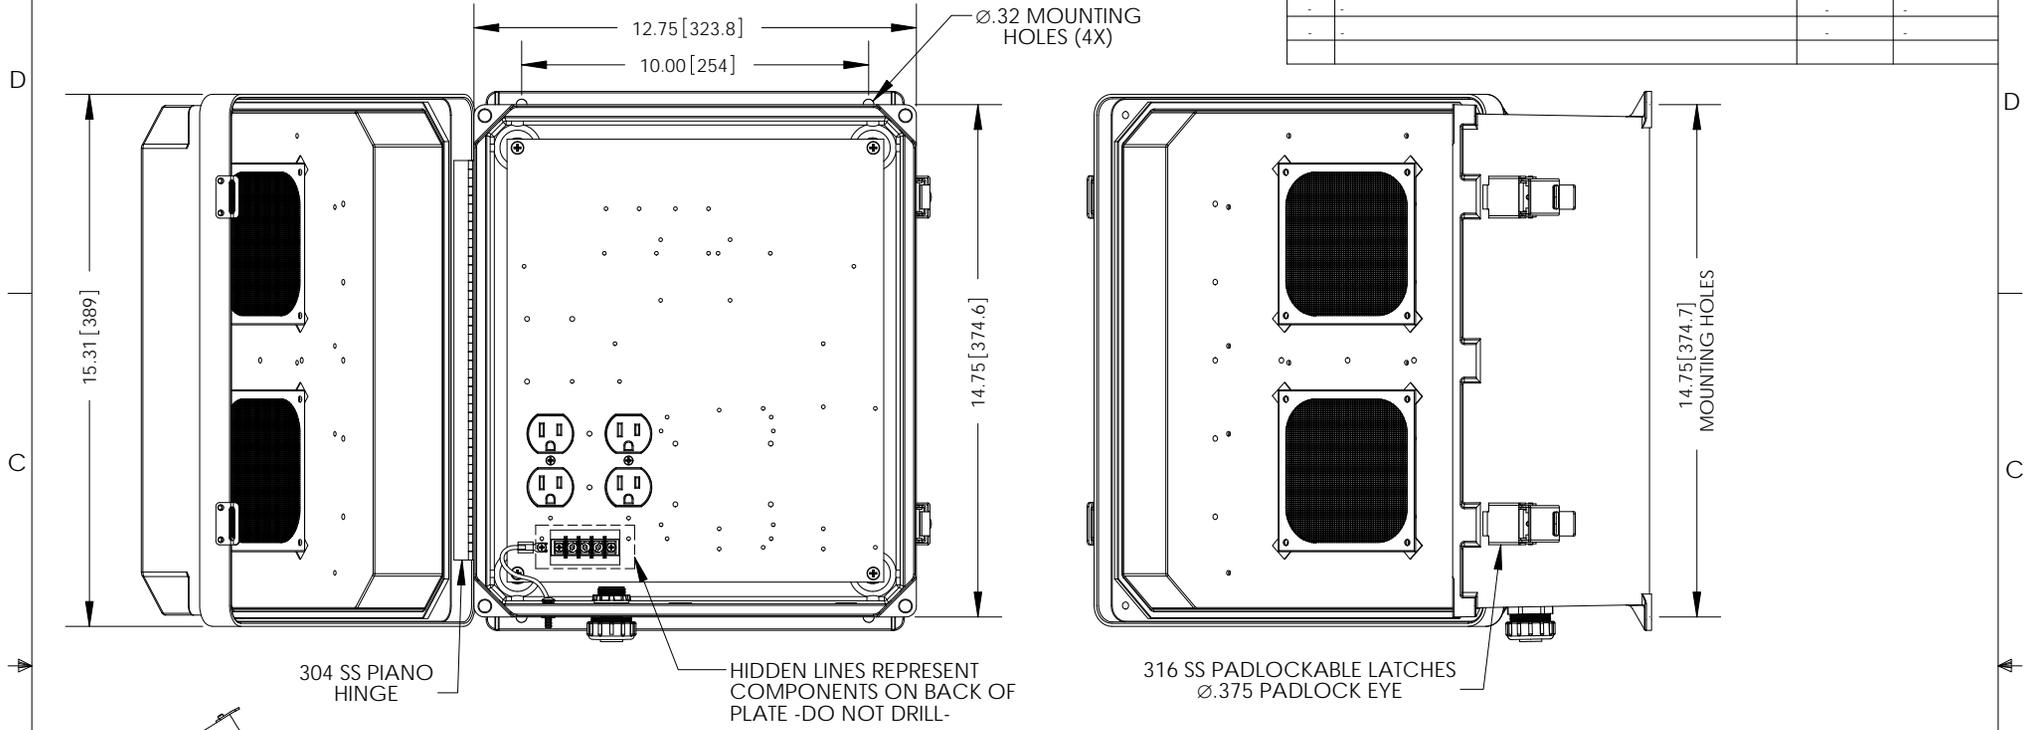
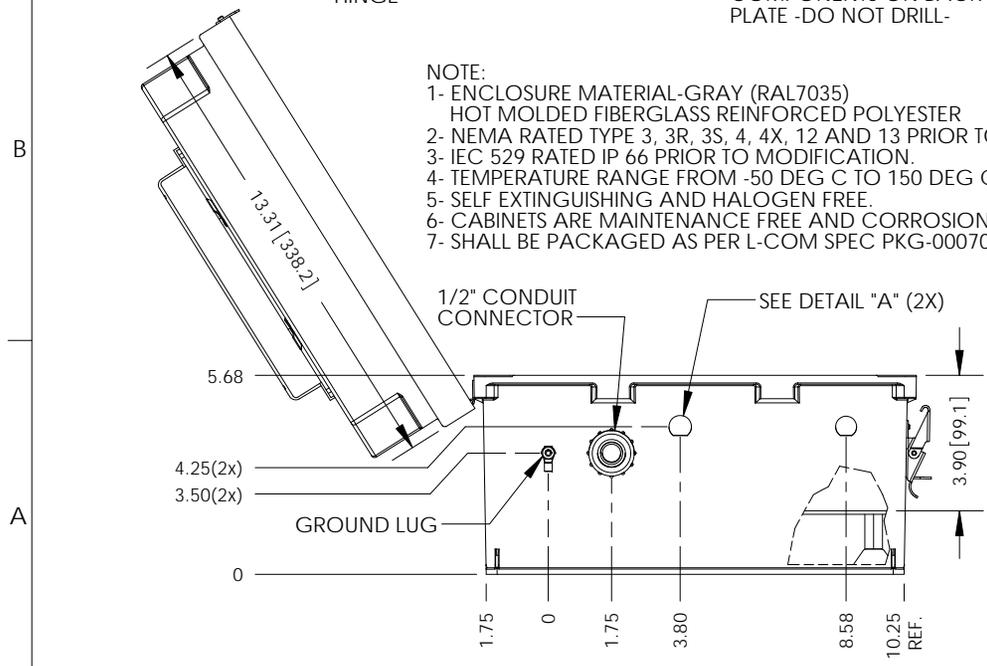


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	Initial Release	12/01/10	B.Puchaski
-	-	-	-
-	-	-	-

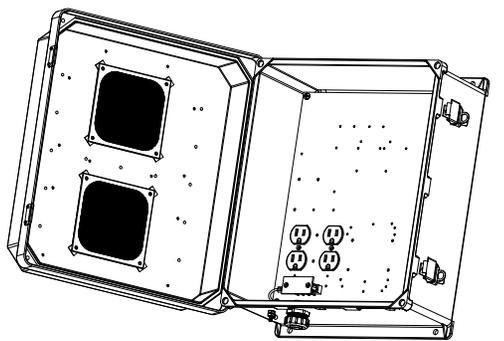

- NOTE:  
 1- ENCLOSURE MATERIAL-GRAY (RAL7035)  
 HOT MOLDED FIBERGLASS REINFORCED POLYESTER  
 2- NEMA RATED TYPE 3, 3R, 3S, 4, 4X, 12 AND 13 PRIOR TO MODIFICATIONS.  
 3- IEC 529 RATED IP 66 PRIOR TO MODIFICATION.  
 4- TEMPERATURE RANGE FROM -50 DEG C TO 150 DEG C.  
 5- SELF EXTINGUISHING AND HALOGEN FREE.  
 6- CABINETS ARE MAINTENANCE FREE AND CORROSION RESISTANT.  
 7- SHALL BE PACKAGED AS PER L-COM SPEC PKG-00070



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY B.Puchaski	12/01/10	
	CHECKED BY M.Martinez	12/01/10	
	APPROVED BY M.Martinez	12/01/10	
DIMENSIONAL TOLERANCES: .X = ±.1 .XX = ±.01 .XXX = ±.005	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY <b>ENCLOSURE</b>
ANGULAR TOLERANCES: ALL = ± 1°	PRODUCT DESCRIPTION <b>NEMA Enclosure 14 x 12 x 7 Weatherproof 120VAC Vented</b>		
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>
		DWG. NO. <b>NB141207-10V</b>	REV. <b>A</b>
		SCALE: NONE	CAD FILE: NB141207-10V.SLDDRW
			SHEET 1 OF 1