




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	9/30/11	D.GRIFFIN

FRONT VIEW

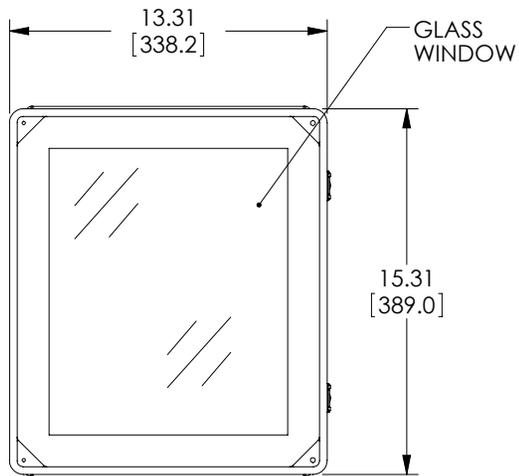

SIDE VIEW

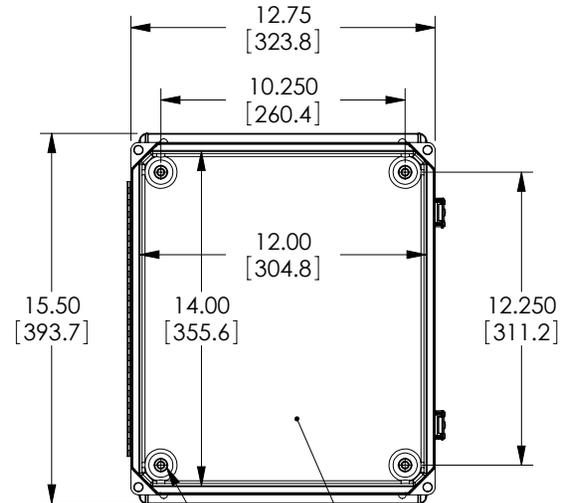
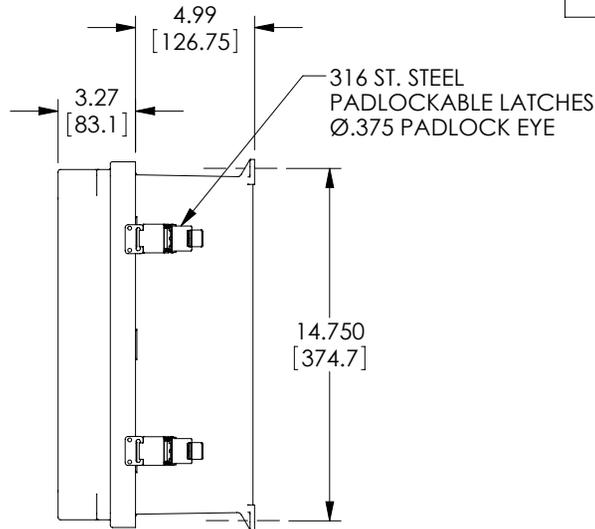


4X #10-32 X .25 BRASS INSERT


1 BAG OF MPS SCREWS SHIPPED LOOSE INSIDE EACH ENCLOSURE

FRONT VIEW (COVER REMOVED)

END VIEW

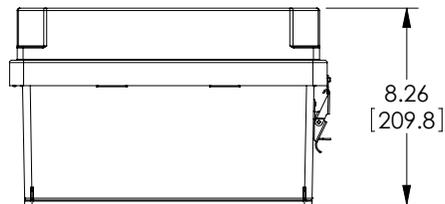

BOTTOM VIEW

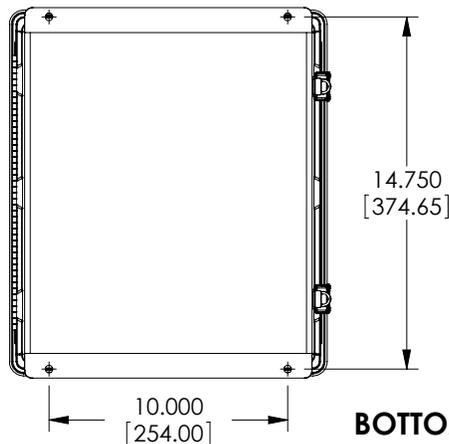

NOTES:

- ENCLOSURE MATERIAL-GRAY (RAL7035) HOT MOLDED FIBERGLASS REINFORCED POLYESTER
- NEMA RATED TYPE 3, 3R, 3S, 4, 4X, 12 AND 13 PRIOR TO MODIFICATIONS.
- IEC 529 RATED IP 66 PRIOR TO MODIFICATION.
- TEMPERATURE RANGE FROM -50 DEG C TO 150 DEG C.
- SELF EXTINGUISHING AND HALOGEN FREE.
- CABINETS ARE MAINTENANCE FREE AND CORROSION RESISTANT.
- SHALL BE PACKAGED AS PER L-COM SPEC PKG-00070

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005	APPROVALS DRAWN BY D. CASTRO CHECKED BY D. PARHAM APPROVED BY M. MARTINEZ	DATE 9/29/11 9/29/11 9/29/11	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845			
	CATEGORY ENCLOSURES			PRODUCT DESCRIPTION FRP 14x12x7" WINDOW ENCL ONLY		
	PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR	SIZE A		FSCM NO. 43321	DWG. NO. NBW141207
	SCALE: NONE		CAD FILE: NBW141207.SLDDRW		SHEET 1 OF 1	