


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/09/05	M.LAHEY
B	ECN# 2462 KIT IS UNASSEMBLED WHEN SHIPPED	07/07/06	MCCORMICK
C	ECN 5405: RE-MODELED AND RE-DIMENSIONED	3/25/11	D.FRISIELLO

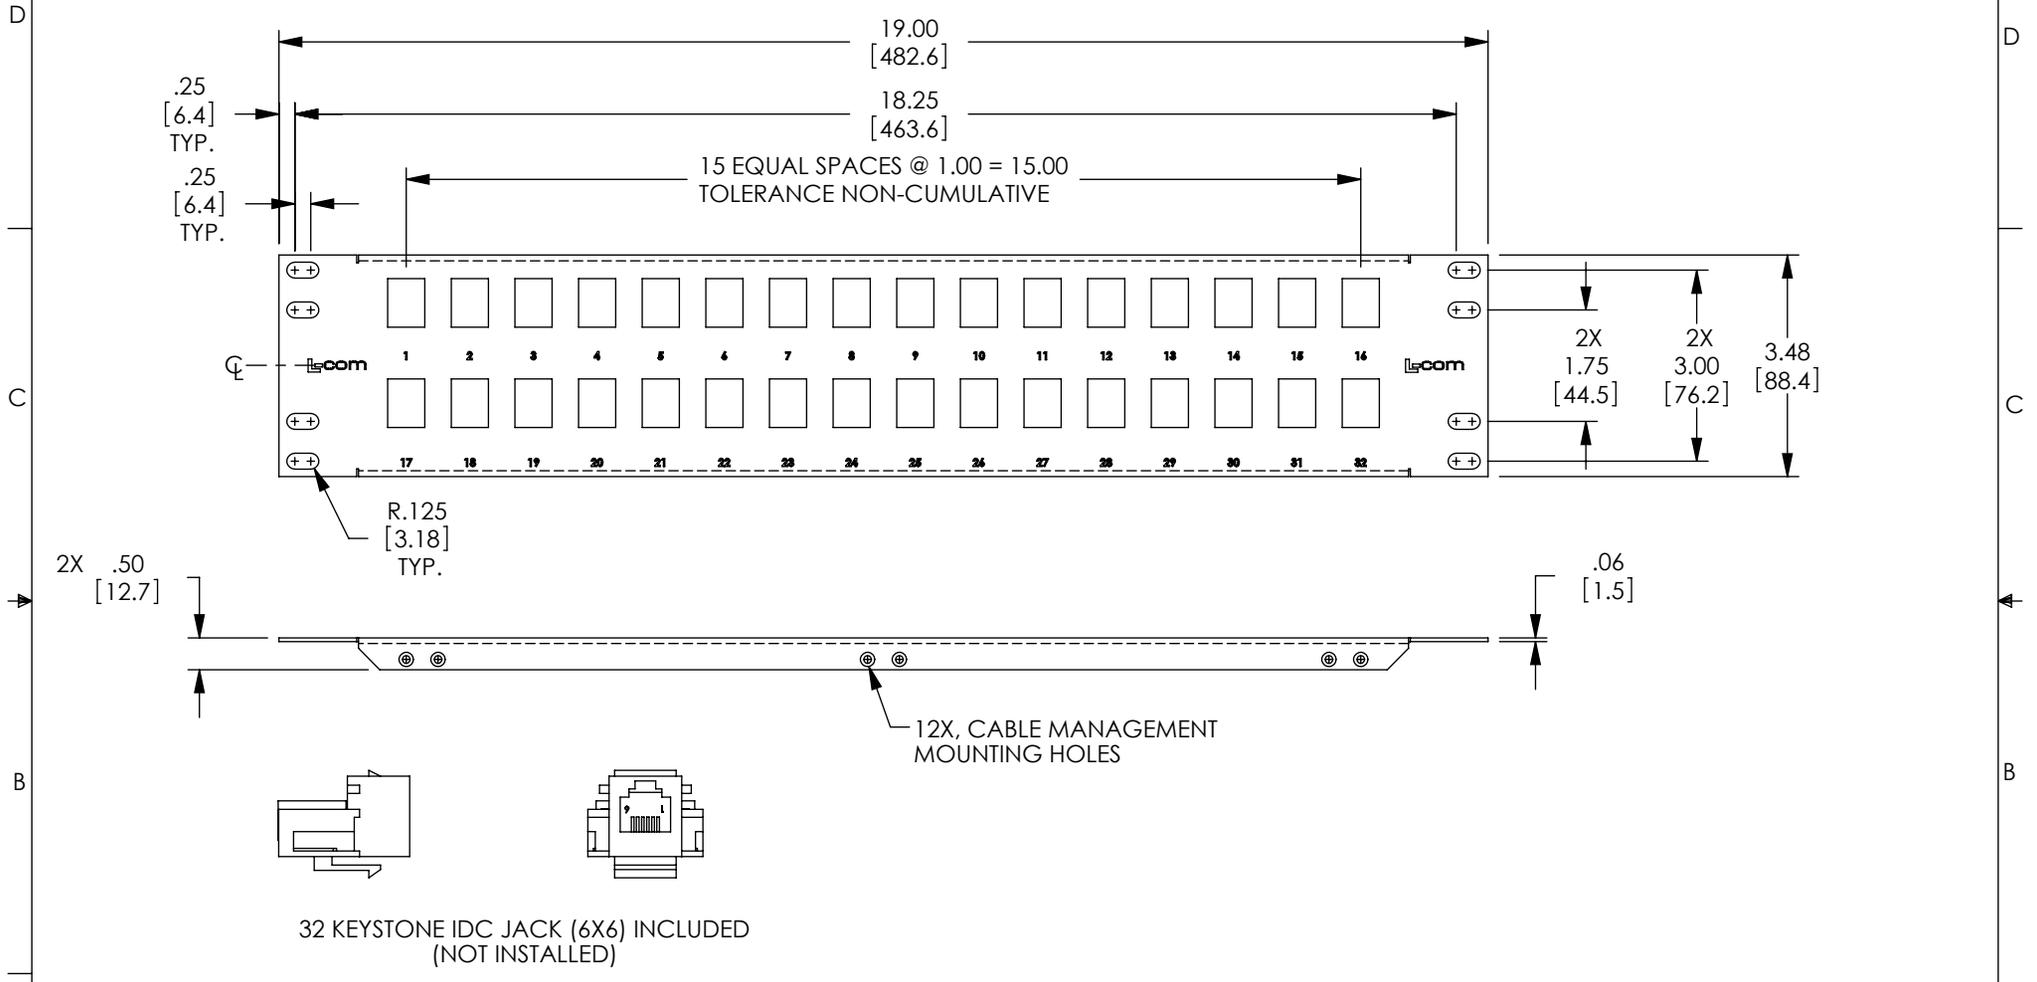

- NOTES:
1. MATERIAL: .06 THICK COLD ROLLED STEEL.
 2. PANEL FINISH: FLAT BLACK POWDER COAT.
 3. SILKSCREEN COLOR: WHITE.
 4. PANEL SHALL BE PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0014.
 5. EACH KIT CONSISTS OF ONE RACK PANEL AS SHOWN ABOVE, AND 32 INSULATION DISPLACEMENT TYPE RJ45 KEYSTONE JACKS. JACKS HAVE PRESS-ON COVERS THAT PROPERLY PUNCH DOWN THE 24AWG OR 26AWG CONDUCTORS.
 6. JACKS ARE U.L. LISTED COMMUNICATIONS CIRCUIT DEVICES.

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: $\leq 12 [305] = +1 [25] / -0$ $> 12 [305] \leq 60 [1524] = +2 [51] / -0$ $> 60 [1524] \leq 120 [3048] = +4 [102] / -0$ $> 120 [3048] \leq 300 [7620] = +6 [152] / -0$ $> 300 [7620] = +3\% / -0\%$	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY M.LAHEY	02/09/05		CATEGORY RACK PANELS
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005	CHECKED BY D.PARHAM	02/09/05	PRODUCT DESCRIPTION 2U x 19" PANEL, 32 KEYSTONE CUTOUTS	
PROJECTION 	APPROVED BY C.MCCORMICK	02/09/05	SIZE A	FSCM NO. 43321
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		DWG. NO. PR35-3206	REV. C
	COLOR VARIATIONS MAY OCCUR		SCALE: NONE	CAD FILE: PR35-3206.SLDDRW
				SHEET 1 OF 1