

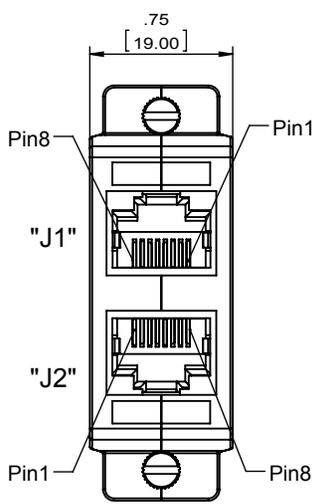


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	4/24/13	D.GRIFFIN
B	ECN7014, ADDED NOTE 4	08/16/2013	B.ZHANG
C	ECN7533;REVISED PLATING OF DIE CAST HOOD,ADDED NOTES 5, NEW RoHS FORMAT	07/29/2014	B.ZHANG

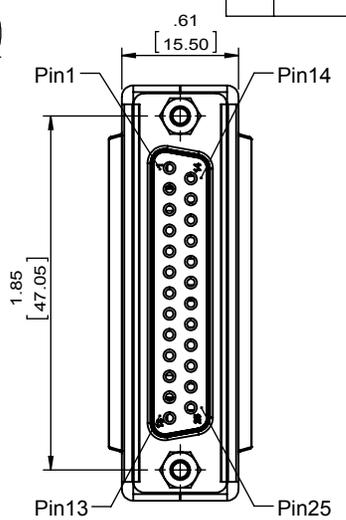

2xRJ45 8P8C SHIELDED FEMALE  
50u" GOLD PLATED CONTACTS  
NICKEL PLATED SHELL

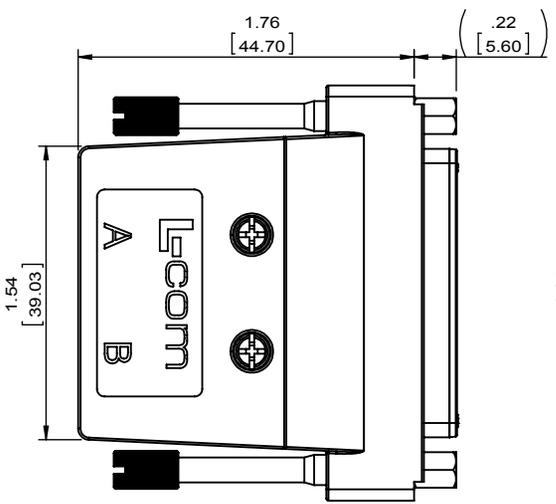

D-SUB 25P CRIMP FEMALE  
15u" GOLD PLATED CONTACT  
NICKEL PLATED SHELL

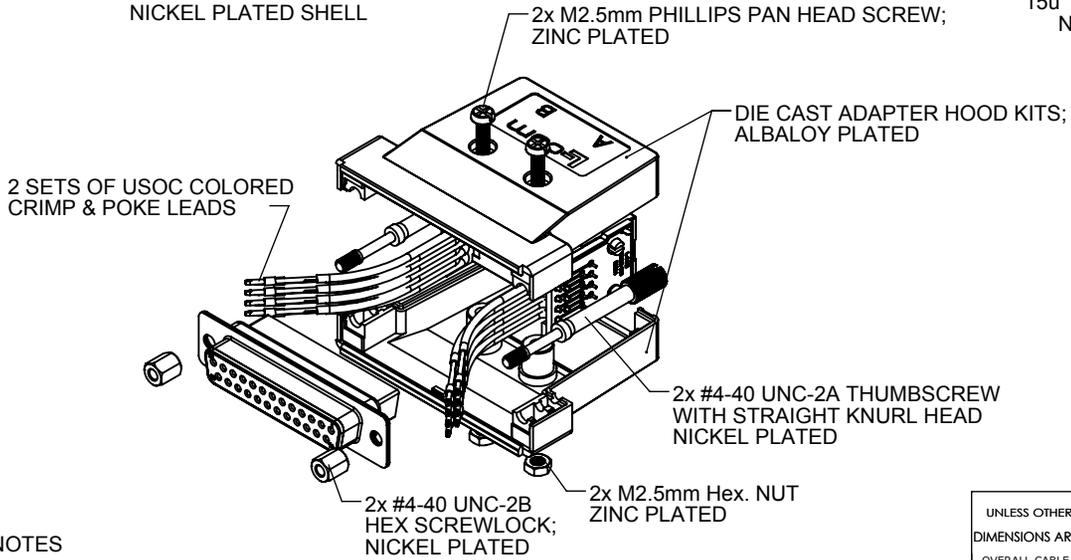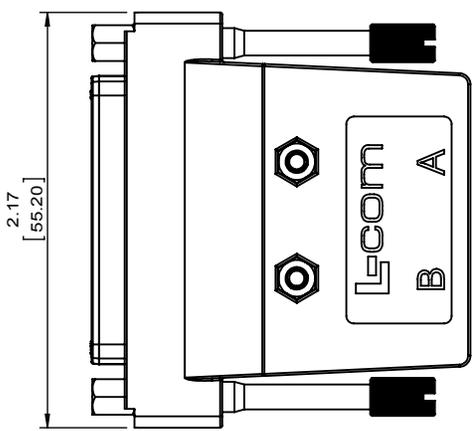

- NOTES
- 1.RJ45 FEMALE MEETS TO TIA-1096
  - 2.LEAD WIRE: UL1061, 26AWG STRANDED COPPER CONDUCTORS
  - 3.ADAPTER SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPEC. PS-0031.
  - 4.ADAPTER SHIPPED UNASSEMBLED
  - 5.ALL DIMENSIONS ARE FOR REFERENCE ONLY
- REGULATORY COMPLIANCE:**  
CE2011/65/EU(RoHS DIRECTIVE)

WIRING MAP		
"J1" (A)	"J2" (B)	WIRE COLOR
Pin1	Pin1	BLUE
Pin2	Pin2	ORANGE
Pin3	Pin3	BLACK
Pin4	Pin4	RED
Pin5	Pin5	GREEN
Pin6	Pin6	YELLOW
Pin7	Pin7	BROWN
Pin8	Pin8	WHITE

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE ≤12[305]=+1[25/-0] >12[305]≤60[1524]=+2[51/-0] >60[1524]≤120[3048]=+4[102/-0] >120[3048]≤300[7620]=+6[152/-0] >300[7620]=+5%/-0 ALL OTHER DIMENSION TOLERANCES: .X=-.2[5.1] .XX=-.02[.51] .XXX=-.005[.13]	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY B.Zhang	03/28/2013	
	CHECKED BY F.Mao	04/18/2013	
	APPROVED BY T.Lu	04/18/2013	
PROJECTION	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY ADAPTER
	COLOR VARIATIONS MAY OCCUR		PRODUCT DESCRIPTION ADAPTER SHIELD, DB25 F/2xRJ45J
	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. RA2588FS
	SCALE: NONE   CAD FILE: RA2588FS.SLDDRW		REV. <b>C</b>