


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	9/19/11	D.GRIFFIN
B	ECN 6881: UPDATED FORMAT NOTES ADN 3D MODEL. ADDED INCHES	6/5/13	D_DESJARDIN

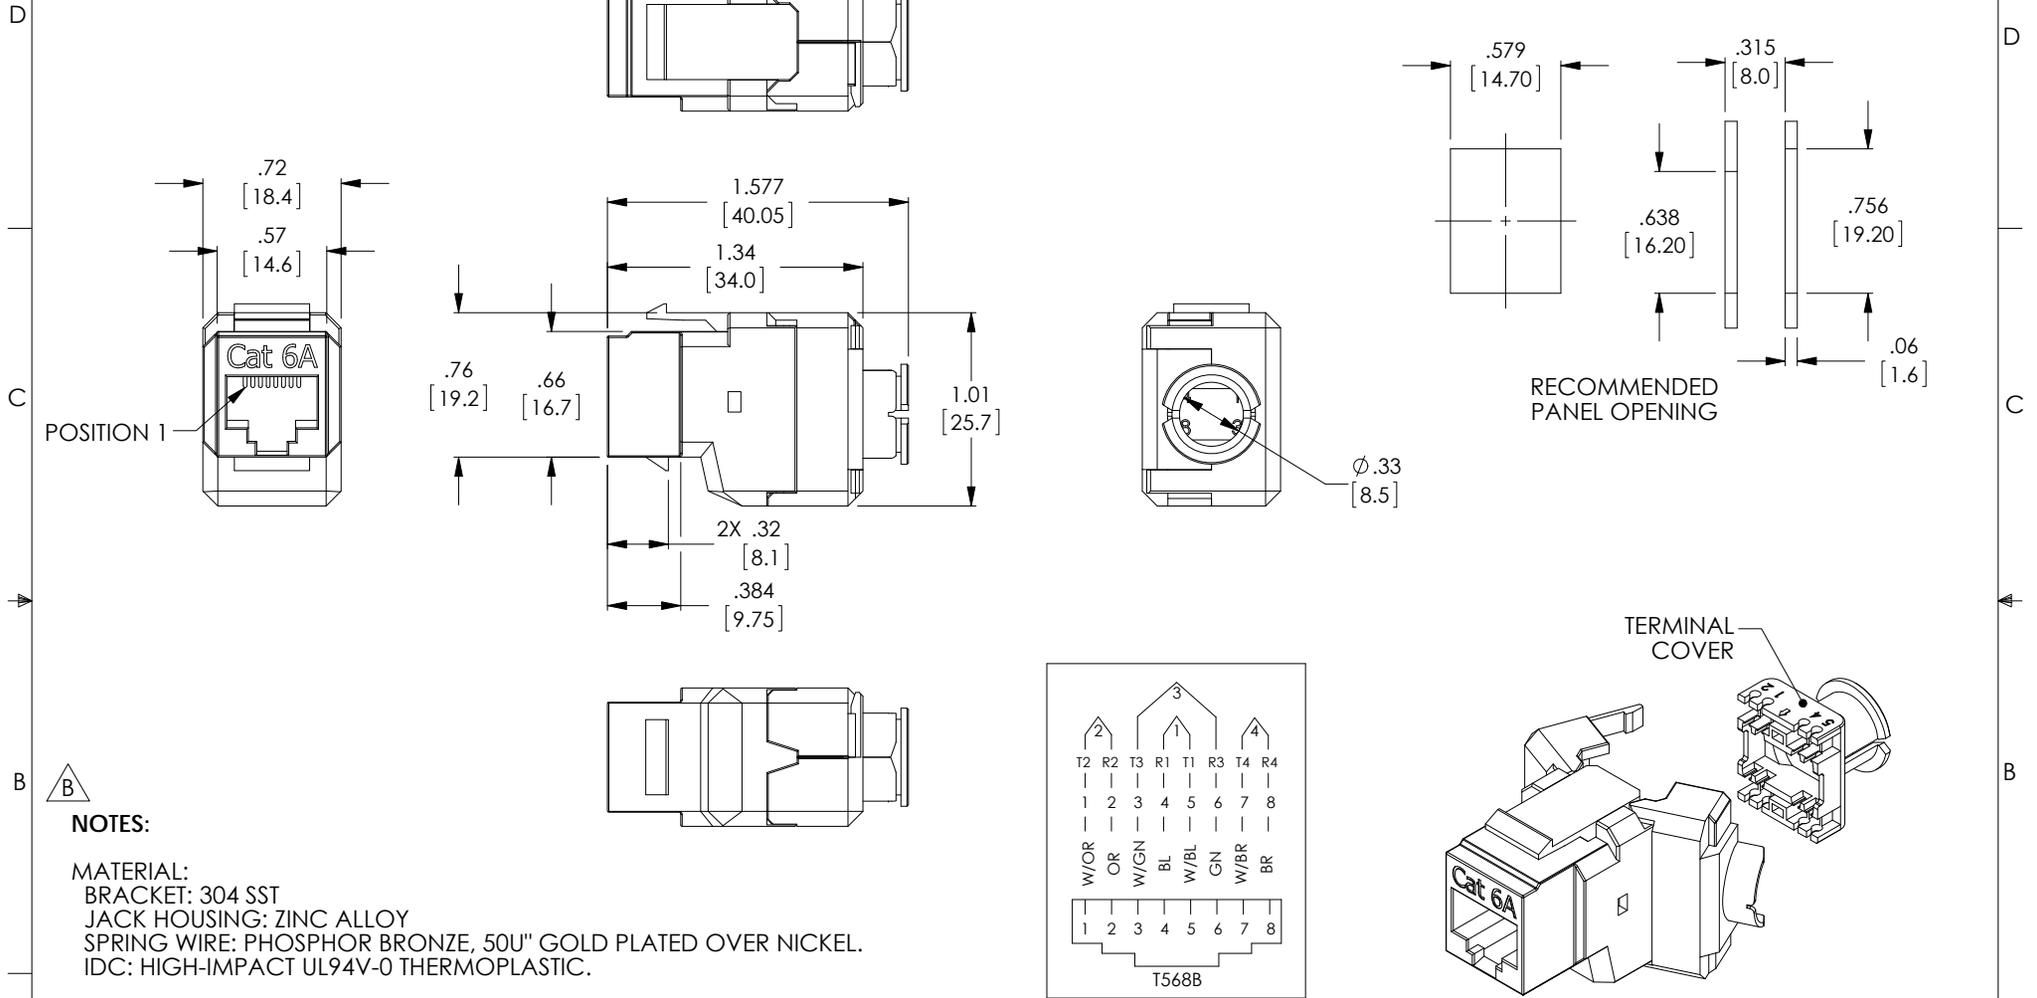

**NOTES:**  
 MATERIAL:  
 BRACKET: 304 SST  
 JACK HOUSING: ZINC ALLOY  
 SPRING WIRE: PHOSPHOR BRONZE, 50U" GOLD PLATED OVER NICKEL.  
 IDC: HIGH-IMPACT UL94V-0 THERMOPLASTIC.

**PHYSICAL CHARACTERISTICS:**  
 CONTACT COMPATIBILITY : ACCOMMODATES 22 TO 24 AWG SOLID.  
 OPERATING TEMPERATURE RANGE : -10 °C TO 60 °C.  
 RATING: CATEGORY 6A

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.  
 CABLE TIE SUPPLIED.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

**REGULATORY COMPLIANCE:**  
 ROHS, CE

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D.FRISIELLO	9/16/11		
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ±.005 [1.3]	CHECKED BY D.GUITADAURO	9/16/11	CATEGORY TELECOM/MODULAR	
	APPROVED BY M.MARTINEZ	9/16/11	PRODUCT DESCRIPTION JACK C6A RJ45 TOOLLESS GRY	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>
			DWG. NO. RJTLC6A-S	REV. <b>B</b>
			SCALE: NONE	CAD FILE: RJTLC6A-S.SLDDRW
				SHEET 1 OF 1