


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	RELEASED FOR PRODUCTION	12/7/01	T. CLARK
B	ECN#2301: .5 WAS .68. 2.1 WAS 2.19	01/30/06	D. PARHAM
C	ECN 6795: REVISED CONTACTS TO 30u", NEW FORMAT, PACKAGING	4/15/13	D.FRISIELLO

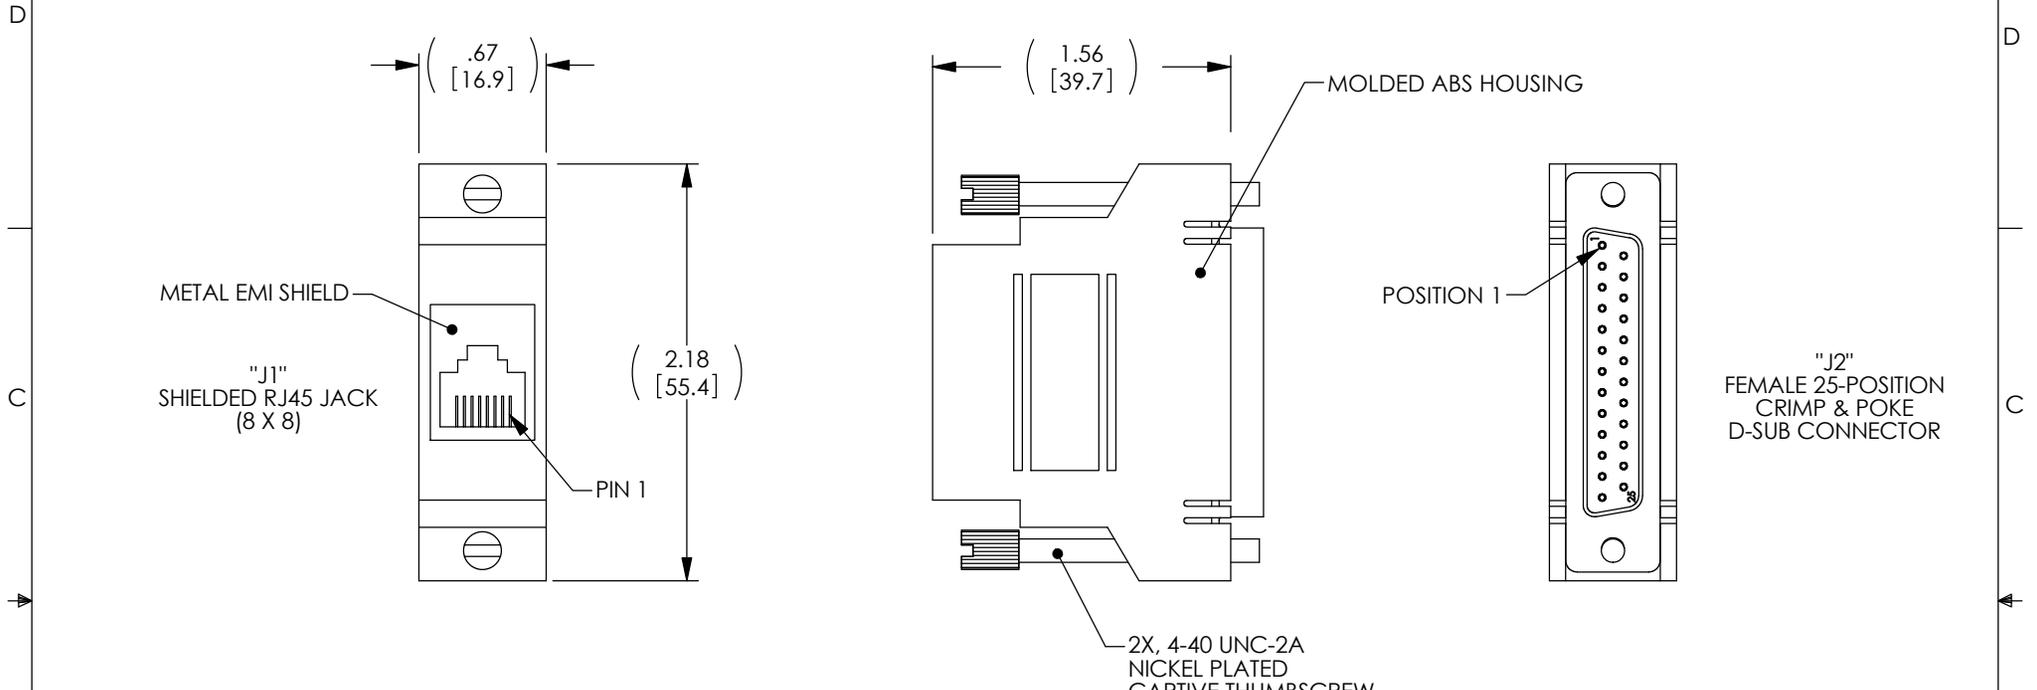

"J1"	LEAD COLOR
1	BLUE
2	ORANGE
3	BLACK
4	RED
5	GREEN
6	YELLOW
7	BROWN
8	WHITE

NOTES:

- MOLDED PARTS ARE 94V-0 PLASTIC, ABS, GRAY.
- CONTACTS HAVE 30 MICRO INCHES OF GOLD PLATE.
- STRANDED COPPER LEADS ARE COLOR CODED.
- ADAPTER KIT MAY BE PROGRAMMED AS NEEDED BY INSERTING AND SEATING EACH FEMALE CONTACT IN THE DESIRED POSITION IN THE D-SUB SHELL.
- D-SUB FRAME SNAPS SECURELY INTO HOUSING.
- RJ45 SHIELDING IS TIED TO D-SUB SHELL.
- ADAPTER KIT IS SUPPLIED UN-ASSEMBLED, IN A LOGO BAG PER L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: $\leq 12 [305] = +1 [25] / -0$ $> 12 [305] \leq 60 [1524] = +2 [51] / -0$ $> 60 [1524] \leq 120 [3048] = +4 [102] / -0$ $> 120 [3048] \leq 300 [7620] = +6 [152] / -0$ $> 300 [7620] = +3\% / -0\%$	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		
	DRAWN BY TJC	12/7/01				
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CHECKED BY DFP	12/7/01	CATEGORY TELECOM/MODULAR			
	APPROVED BY CM	12/7/01	PRODUCT DESCRIPTION ADAPTER DB25F TO RJ45 SHLD JACK			
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. RS25EMI8F	REV. C
			SCALE: NONE	CAD FILE: RS25EMI8F.SLDDRW	SHEET 1 OF 1	