
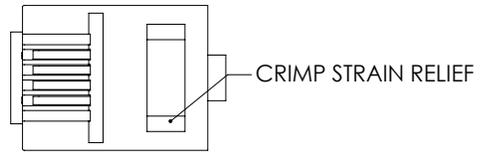
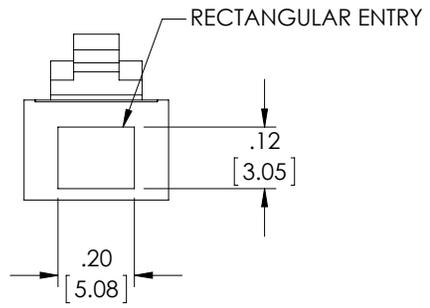

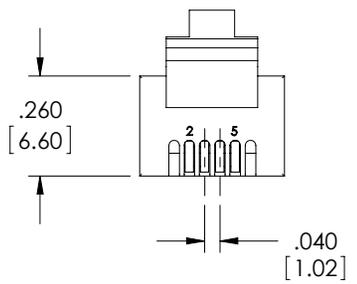


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	DRAWING REPLACES TD6P4C-OD1 AT REV C	11/13/14	D. CASTRO

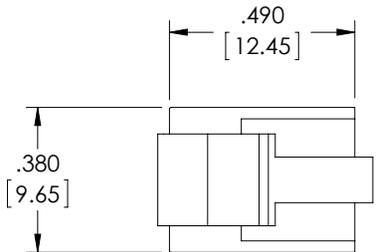

\*CONTACTS SHOWN CRIMPED

**NOTES:**

**MATERIALS:**  
 HOUSING: POLYCARBONATE UL94V-0  
 CONTACTS: COPPER ALLOY  
 CONTACT PLATING: 15 μINCHES GOLD OVER NICKEL

**ELECTRICAL:**  
 CURRENT RATING: 2.0 AMP MAX  
 VOLTAGE RATING: 250 VAC MAX  
 INSULATION RESISTANCE: 500 MΩ MIN

**MECHANICAL:**  
 CONDUCTOR ACCEPTANCE: 24 TO 28 AWG  
 MAX CONDUCTOR OD: .038"  
 CONDUCTOR TYPE: STRANDED OR SOLID  
 CONTACT STYLE: TWO PRONG

**ENVIRONMENTAL:**  
 OPERATING TEMPERATURE RANGE: -40°C TO +85°C

**MISCELLANEOUS:**  
 DIMENSIONS ARE FOR REFERENCE ONLY.  
 COMPONENT SHALL BE BULK PACKAGED 100 PIECES PER BAG IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
 CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		
	DRAWN BY D. PARHAM	3/27/2002				
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ± .005 [1.3]	CHECKED BY T. CLARK	3/28/2002	CATEGORY TELECOM/MODULAR			
	APPROVED BY C. McCORMICK	3/28/2002	PRODUCT DESCRIPTION PLUG, RJ11 (6X4) FLT CBL			
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. TD6P4C	REV. <b>A</b>
			SCALE: NONE	CAD FILE: TD6P4C.SLDDRW	SHEET 1 OF 1	