

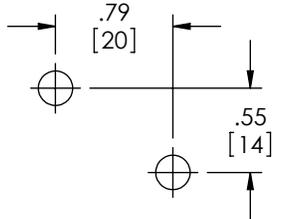
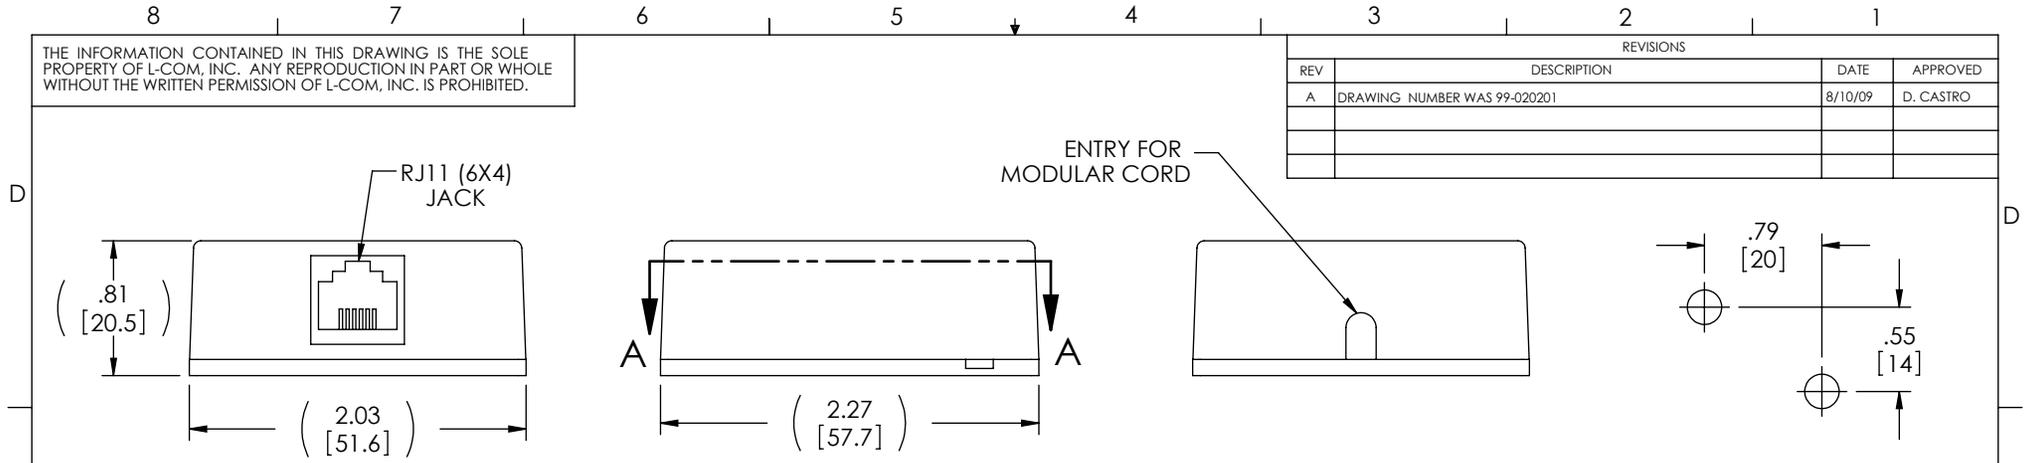


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	DRAWING NUMBER WAS 99-020201	8/10/09	D. CASTRO




MOUNTING DIMENSIONS (ORIENT AS NEEDED)

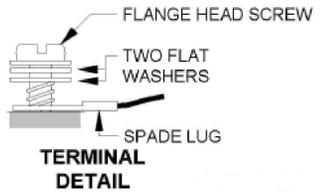

SUPPLIED WITH TWO 5/8" PHILLIPS HEAD WOOD SCREWS

(SUPPLIED WITH DOUBLE-SIDED FOAM TAPE FOR SURFACE MOUNTING WITHOUT HARDWARE)

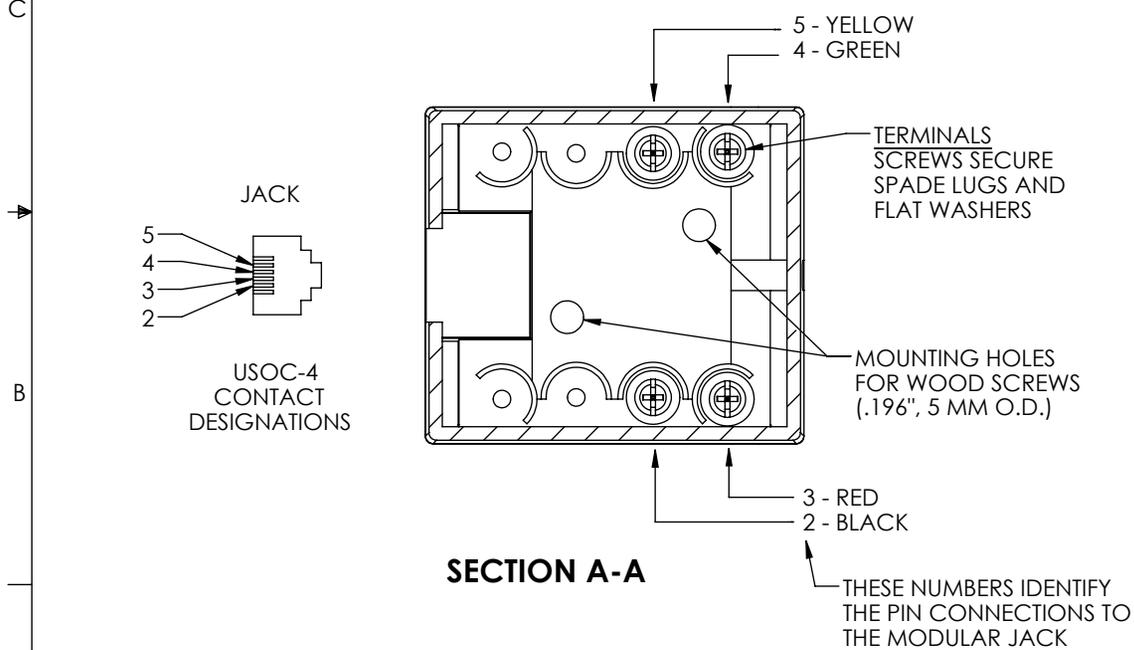

SECTION A-A

THESE NUMBERS IDENTIFY THE PIN CONNECTIONS TO THE MODULAR JACK

**RoHS Compliant**

**NOTES:**

1. BASE AND COVER ARE HIGH IMPACT THERMOPLASTIC, COLOR: BEIGE.
2. CABLE ENTRIES PERMIT REAR OR BOTTOM ENTRY.
3. COVER SNAPS ON.
4. INTERNAL LEADS HAVE COLOR CODED INSULATION PER USOC 8.
5. JACK CONTACTS HAVE 30μ GOLD PLATING.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE	<b>L-com</b> Global Connectivity 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY TJC	2/2/99	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CHECKED BY BJD	2/2/99	CATEGORY MODULAR
	APPROVED BY EJS	2/2/99	PRODUCT DESCRIPTION RJ11 (6X4) JACK, SIDE ACCESS
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>
			FSCM NO. <b>43321</b>
			DWG. NO. TDA310-4C
			REV. <b>A</b>
			SCALE: NONE
			CAD FILE: TDA310-4C.SLDDRW
			SHEET 1 OF 1