


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/17/06	MCCORMICK
B	ECN2547: UPDATE DRAWING FORMAT. CORRECT NOTES. REMOVED TINNED DIMENSION.	08/30/06	D. PARHAM
C	ECN3306: ADDED 5, 10, 14 & 25FT LENGTHS. UPDATED FORMAT	04/28/08	D. PARHAM

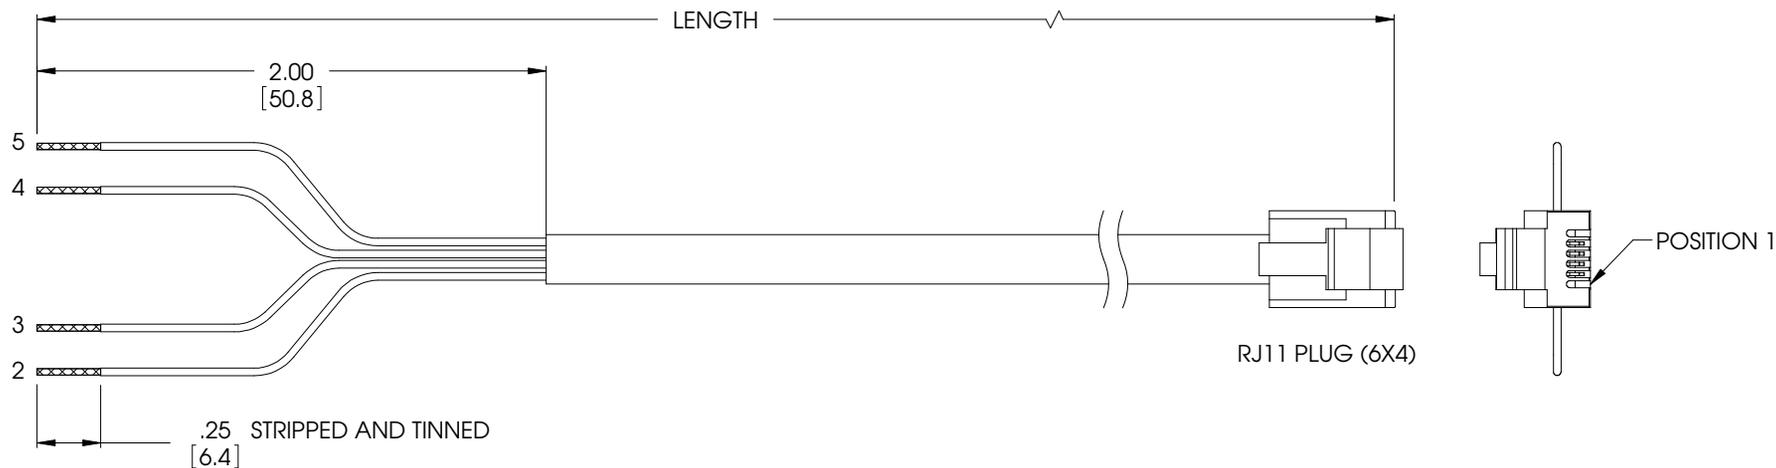

PART NUMBER	LENGTH	
	FEET	METERS
TDC019-1	1.0	0.31
TDC019-2	2.0	0.61
TDC019-5	5.0	1.52
TDC019-7	7.0	2.13
TDC019-10	10.0	3.05
TDC019-14	14.0	4.27
TDC019-25	25.0	7.62

WIRING MAP	
BLACK	2
RED	3
GREEN	4
YELLOW	5

NOTES:

MATERIAL:
 PLUG HOUSING: POLYCARBONATE, CLEAR, UL94V-0
 CONTACTS: PHOSPHOR BRONZE
 CABLE JACKET: PVC, GRAY

FINISH:
 CONTACTS: 50 μINCHES GOLD IN CONTACT AREA
 OVER 100 μINCHES NICKEL PLATE OVERALL.

CABLE CHARACTERISTICS:
 4 CONDUCTOR FLAT MODULAR CORD, SILVER SATIN PVC OUTER JACKET
 U.L. STYLE 20251, 26 AWG STRANDED

MISCELLANEOUS:
 PLUG CONFORMS TO TIA-1096
 OPERATING TEMPERATURE RANGE: -20°C TO +60°C
 CORDS TO BE TESTED FOR CONTINUITY
 CORDS TO BE INDIVIDUALLY PACKAGED IN A POLYBAG

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (mm) OVERALL CABLE LENGTH TOLERANCE: ≤ 12 (305) = +1 (25) / -0 > 12 (305) ≤ 60 (1524) = +2(51) / -0 > 60 (1524) ≤ 120 (3048) = +4 / -0 > 120 (3048) ≤ 300 (7620) = +6 / -0 > 300 (7620) = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = .3 .XX = .15 PROJECTION 	APPROVALS DRAWN BY C.MCCORMICK	DATE 07/17/2006	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845 CATEGORY MODULAR
	CHECKED BY ENG	07/17/2006	
	APPROVED BY J.ROBERTS	07/17/2006	SIZE A FSCM NO. 43321 DWG. NO. TDC019 REV. C
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR	SCALE: NONE CAD FILE: TDC019.SLDDRW SHEET 1 OF 1	