


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/17/06	MCCORMICK
B	ECN2547: UPDATE DRAWING FORMAT. CORRECT NOTES.	08/30/06	D. PARHAM
C	ECN3306: ADDED 10, 50 & 100 FT LENGTHS. UPDATED FORMAT.	04/28/08	D. PARHAM
D	ECN 6669: CN RELEASE. UPD FORMAT/PKG. CHANGED CONTACT PLATING	8/27/13	D. DESJARDIN

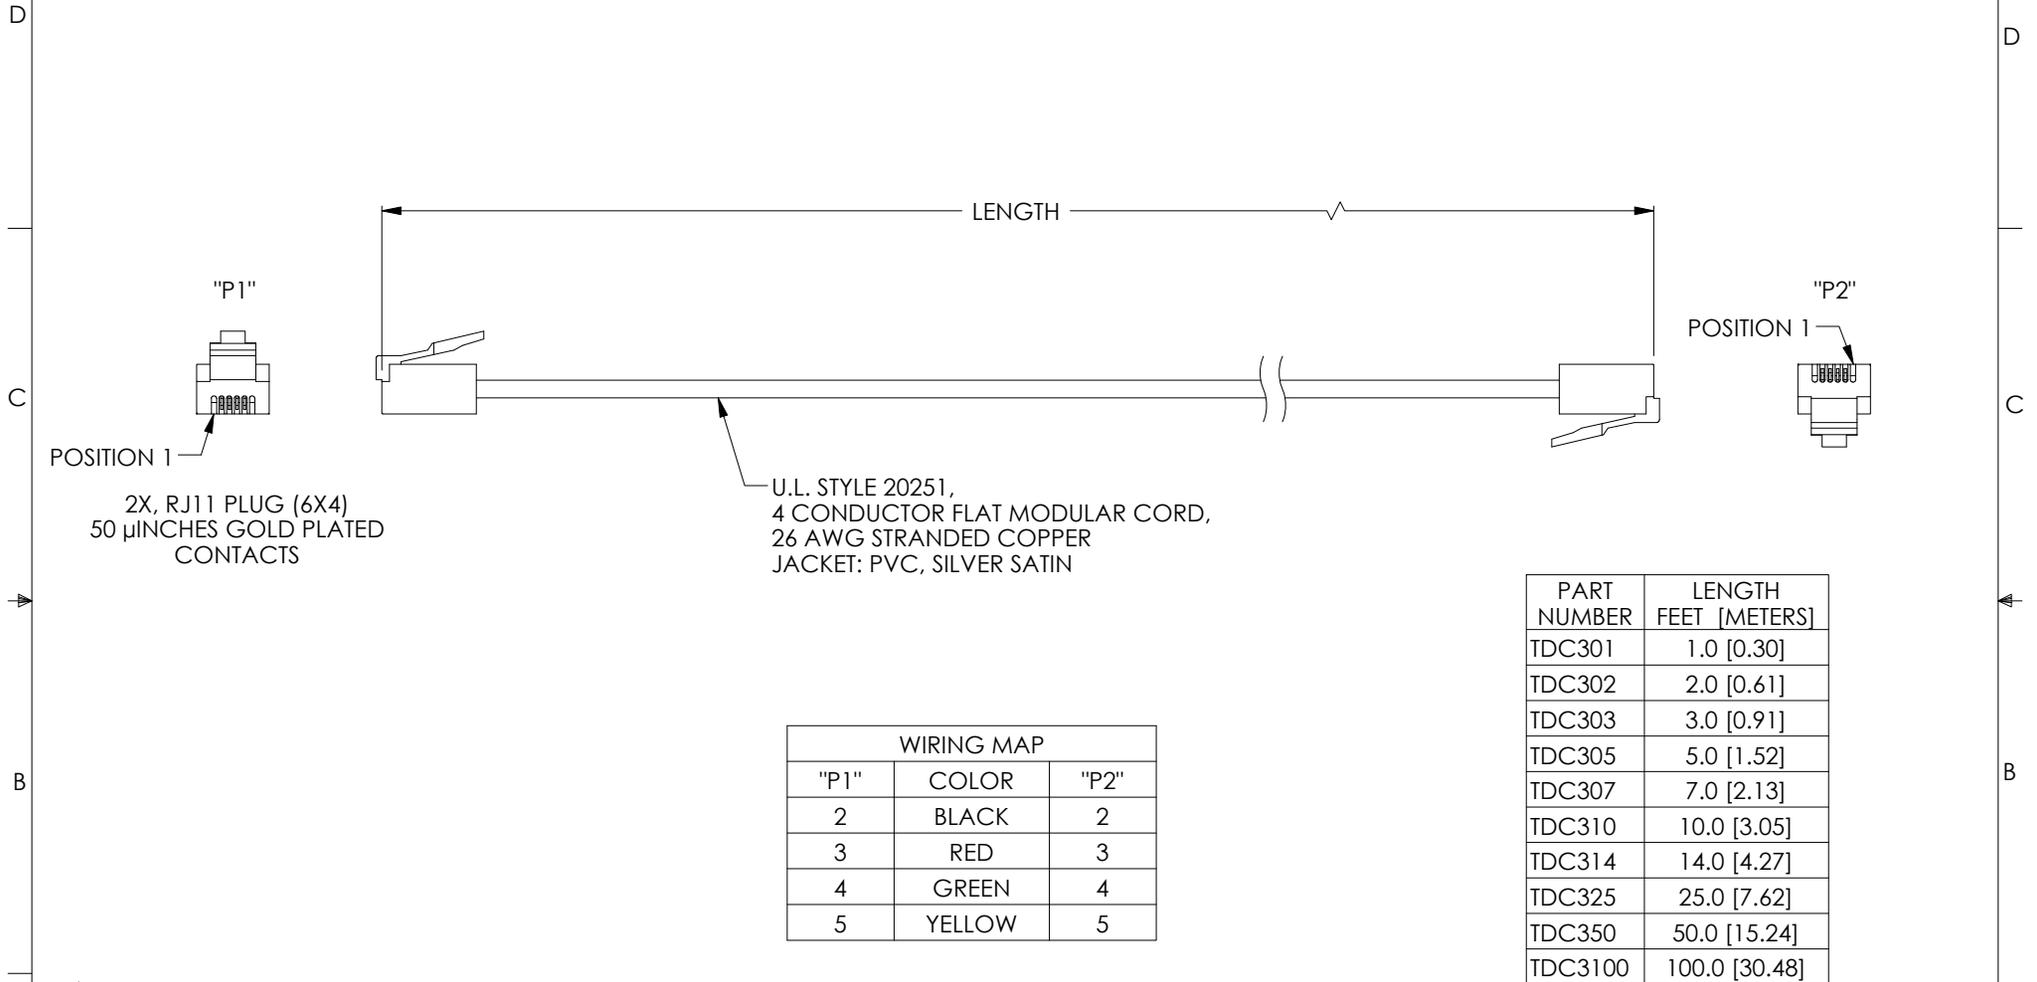

"P1"
POSITION 1
2X, RJ11 PLUG (6X4)
50 μINCHES GOLD PLATED CONTACTS

U.L. STYLE 20251,
4 CONDUCTOR FLAT MODULAR CORD,
26 AWG STRANDED COPPER
JACKET: PVC, SILVER SATIN

"P2"
POSITION 1

WIRING MAP		
"P1"	COLOR	"P2"
2	BLACK	2
3	RED	3
4	GREEN	4
5	YELLOW	5

PART NUMBER	LENGTH FEET [METERS]
TDC301	1.0 [0.30]
TDC302	2.0 [0.61]
TDC303	3.0 [0.91]
TDC305	5.0 [1.52]
TDC307	7.0 [2.13]
TDC310	10.0 [3.05]
TDC314	14.0 [4.27]
TDC325	25.0 [7.62]
TDC350	50.0 [15.24]
TDC3100	100.0 [30.48]



NOTES:

1. PLUG CONFORMS TO TIA-1096.
2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
ROHS, CE



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ±.005 [1.13]	APPROVALS DRAWN BY C.MCCORMICK	DATE 07/17/2006	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	CHECKED BY ENG APPROVED BY J.ROBERTS	07/17/2006	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	CATEGORY TELECOM/MODULAR PRODUCT DESCRIPTION FLAT CBL(6X4) STRAIGHT
	SIZE A	FSCM NO. 43321	DWG. NO. TDC301 REV. D
	SCALE: NONE	CAD FILE: TDC301.SLDDRW	SHEET 1 OF 1