


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
F	ECN 6881; REVISED PANEL OPENING. UPD DIMENSIONS. ADDED COMPLIANCE	6/14/13	D. DESJARDIN
G	ECN 7409; UPDATED PER NEW SUPPLIER SPEC	5/19/14	D. CASTRO
H	ECN 11115; REVISE 100u" TO 50u" MIN. FOR NICKEL PLATE, NEW FORMAT	04/28/2021	DGUST

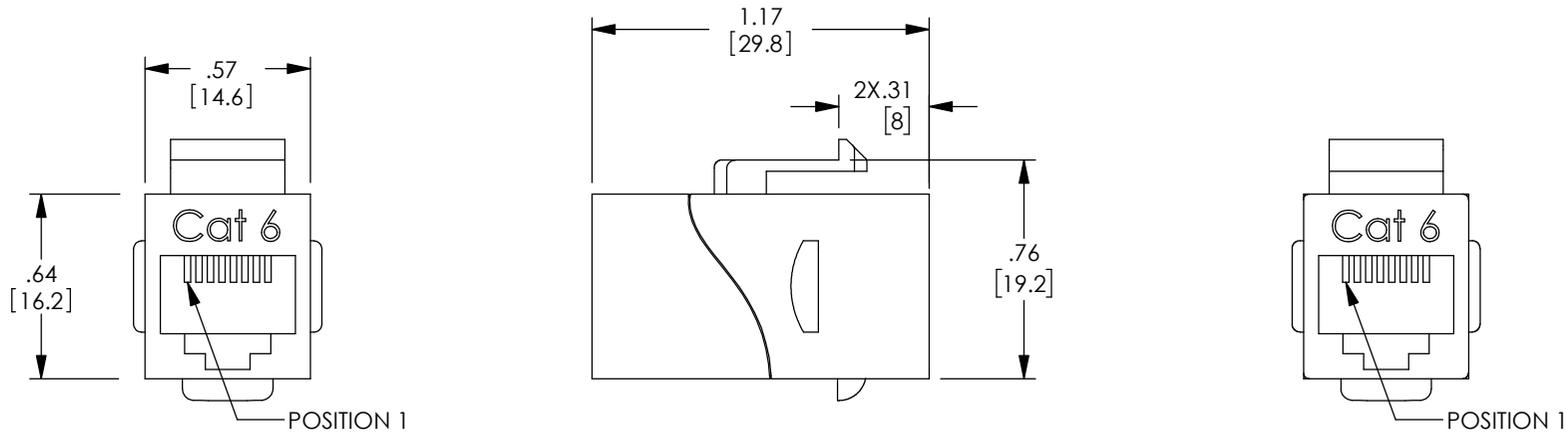

NOTES:


MATERIAL:
 HOUSING: PC UL94V-0
 COLOR: BLACK.
 CONTACTS: PHOSPHOR BRONZE, 50 μINCHES GOLD PLATE OVER
 50 μINCHES MIN. NICKEL PLATE.

ELECTRICAL:
 DC CURRENT RATING: 1.5 AMP
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VOLTS DC.

MISCELLANEOUS:
 WIRING: STRAIGHT THROUGH
 OPERATING TEMPERATURE RANGE: -10°C TO +60°C.
 APPLICATION: CATEGORY 6.
 PANEL THICKNESS: .06" [1.6mm] MAX.

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.



RECOMMENDED PANEL OPENING

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [5] ANGLES ± 1° .XXX = ± .005 [13]	APPROVALS DRAWN BY: B.MAZEJKA CHECKED BY: D.PARHAM APPROVED BY: R.CARRICK	DATE 06/16/2003 07/03/2003 07/03/2003	L-com an INFINITI brand 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR		CATEGORY TELECOM/MODULAR
THIRD-ANGLE PROJECTION 	PRODUCT DESCRIPTION CAT 6 KEYSTONE FEED-THRU CPLR		SCALE: NONE CAD FILE: TDG1026KC6.SLDDRW
SIZE A 43321		DWG. NO. TDG1026KC6	REV. H