



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.




REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	5/18/11	D.GRIFFIN
B	ECN 6881: REVISED PANEL CUTOUT, UPDATED MODEL/DIMENSIONS	6/13/13	D. DESJARDIN
C	ECN 7409: UPDATED PER NEW SUPPLIER SPEC	5/19/14	D. CASTRO

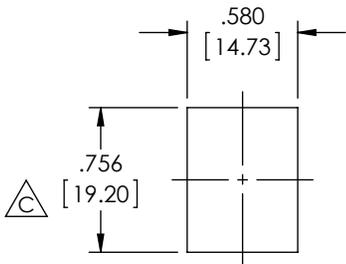

RECOMMENDED
PANEL OPENING

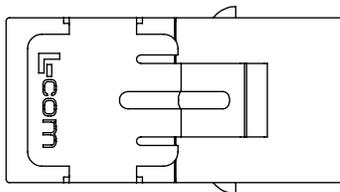

WIRING	
PIN 1	PIN 1
PIN 2	PIN 2
PIN 3	PIN 3
PIN 4	PIN 4
PIN 5	PIN 5
PIN 6	PIN 6
PIN 7	PIN 7
PIN 8	PIN 8
SHIELD	SHIELD

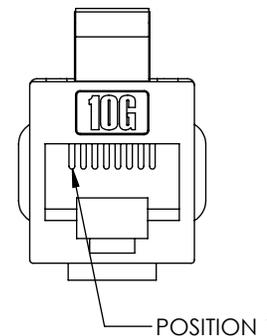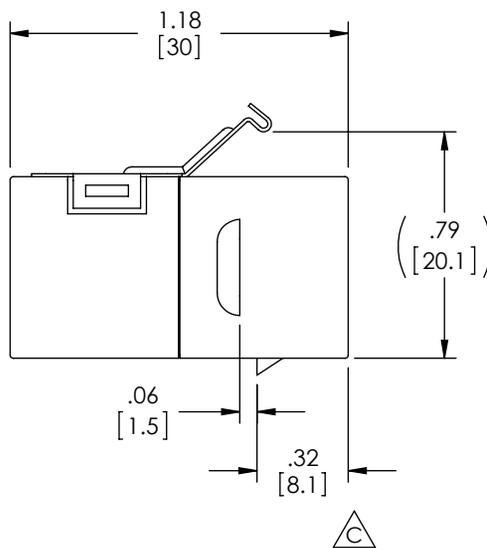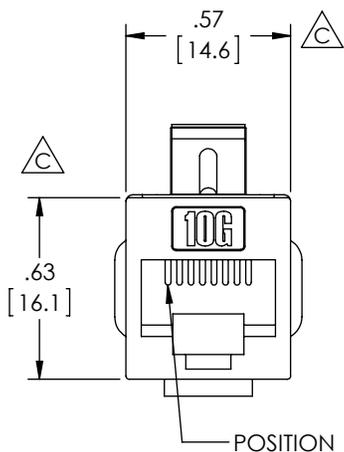

NOTES:

MATERIAL:
HOUSING: ABS, UL94V-0, COLOR: BLACK.
CONTACTS: PHOSPHOR BRONZE
CONTACT PLATING: GOLD, 50 μ INCHES OVER NICKEL PLATE.
SHIELD: BRASS WITH NICKEL PLATE.

ELECTRICAL:
DC CURRENT RATING: 1.5 AMP (MAX.)
VOLTAGE RATING: 150 VOLTS
INSULATION RESISTANCE: 500MΩ

MISCELLANEOUS:
RATING: CATEGORY 6A
OPERATING TEMPERATURE RANGE: -10°C TO +60°C.

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

REGULATORY COMPLIANCE:
CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: $\le 12 [305] = +1 [25] / -0$ $> 12 [305] \le 60 [1524] = +2 [51] / -0$ $> 60 [1524] \le 120 [3048] = +4 [102] / -0$ $> 120 [3048] \le 300 [7620] = +6 [152] / -0$ $> 300 [7620] = +5\% / -0\%$	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D. CASTRO	5/3/11	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [5.1] .XXX = ± .005 [1.3]	CHECKED BY D. PARHAM	5/3/11	PRODUCT DESCRIPTION CAT 6A SHLD RJ45 KEYSTONE CPLR
PROJECTION 	APPROVED BY D. GALLAGHER	5/18/11	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A FSCM NO. 43321 DWG. NO. TDG1026KS-C6A REV. C
	COLOR VARIATIONS MAY OCCUR		