


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE  
PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE  
WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS |                 |          |           |
|-----------|-----------------|----------|-----------|
| REV       | DESCRIPTION     | DATE     | APPROVED  |
| A         | INITIAL RELEASE | 10/30/13 | D.GRIFFIN |
|           |                 |          |           |
|           |                 |          |           |

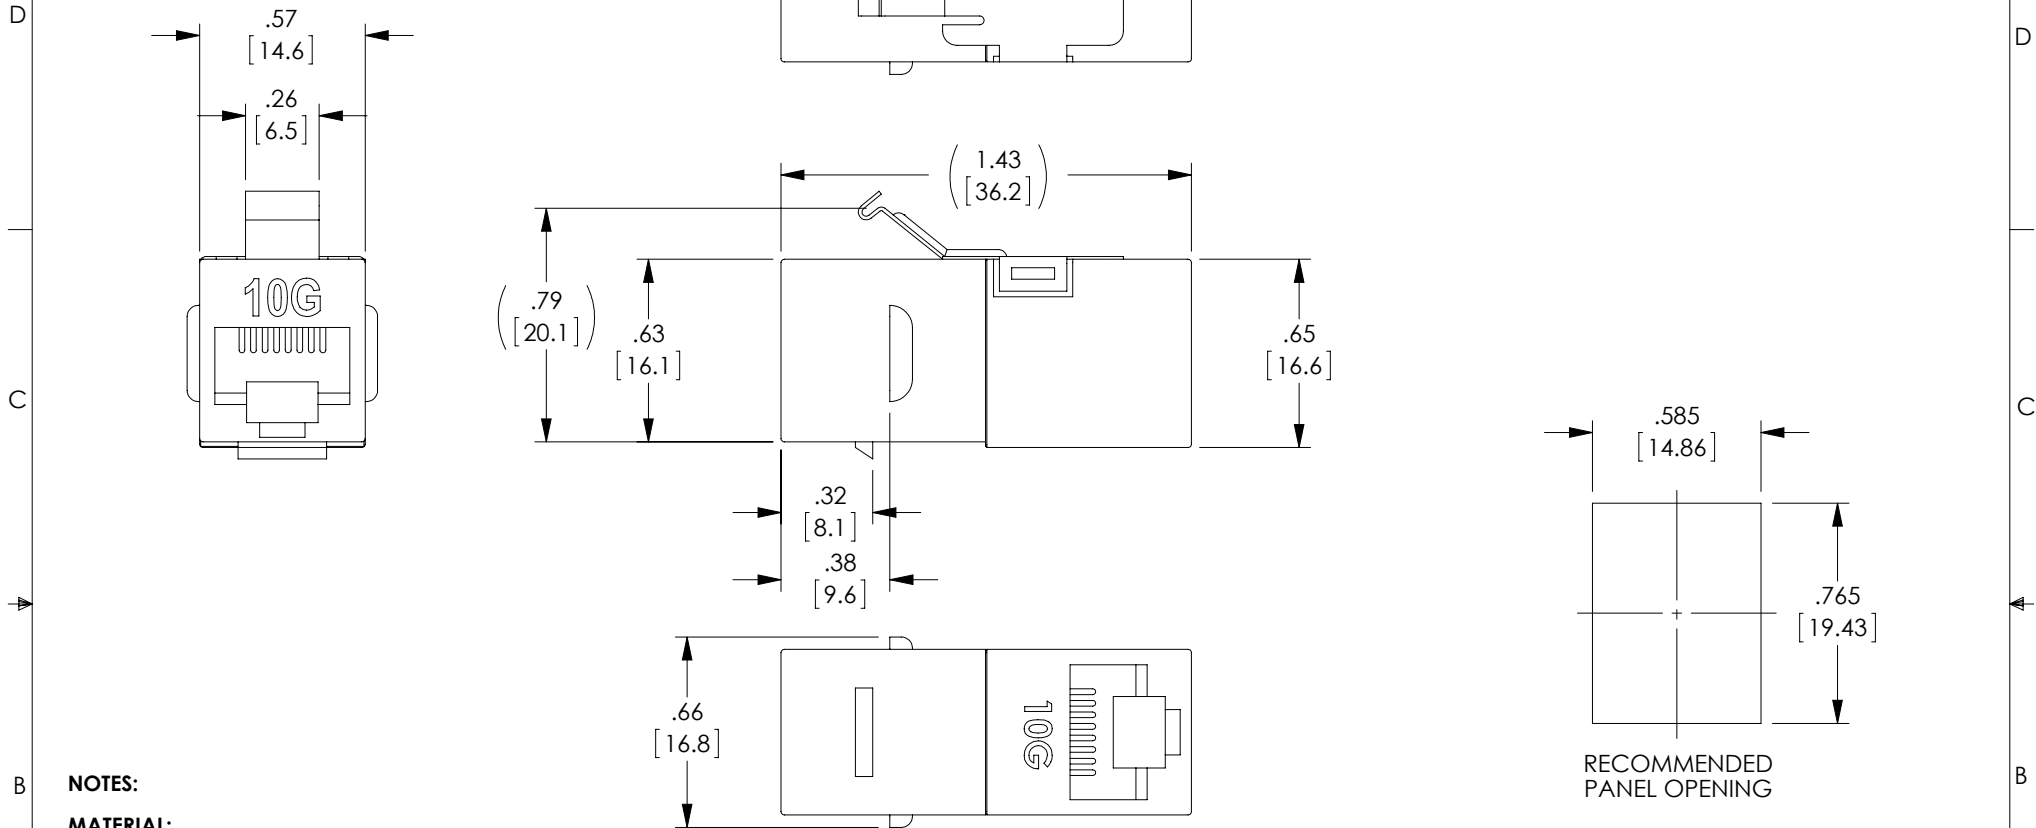

#### NOTES:

#### MATERIAL:

SHIELDED CASE: BRASS, NICKEL PLATED.  
BRACKET: STAINLESS STEEL.  
COUPLER HOUSING: ABS, UL94V-0  
CONTACT HOLDER: ABS, UL94V-0  
JACK CONTACTS: PHOSPHOR BRONZE, 50 μINCHES GOLD PLATE.

#### ELECTRICAL:

DC CURRENT RATING: 1.5 AMPS  
DIELECTRIC WITHSTANDING VOLTAGE: 1000 VOLTS AC.

#### MISCELLANEOUS:



OPERATING TEMPERATURE RANGE: -10°C TO +60°C  
APPLICATION: CATEGORY 6.  
WIRING: STRAIGHT THROUGH.  
PANEL THICKNESS: .065" [1.65mm] MAX.  
ALL DIMENSIONS ARE FOR REFERENCE ONLY.

#### PACKAGING:

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE  
WITH L-COM SPECIFICATION PS-0031.

#### REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

|  |                               |          |  |                          |                                 |                  |
|--|-------------------------------|----------|--|--------------------------|---------------------------------|------------------|
| UNLESS OTHERWISE SPECIFIED,<br>DIMENSIONS ARE IN INCHES [mm]<br><br>OVERALL CABLE LENGTH TOLERANCE:<br>≤12 [305] = +1 [25] / -0<br>>12 [305] ≤60 [1524] = +2 [51] / -0<br>>60 [1524] ≤120 [3048] = +4 [102] / -0<br>>120 [3048] ≤300 [7620] = +6 [152] / -0<br>>300 [7620] = +5% / -0%<br><br>ALL OTHER DIMENSIONAL TOLERANCES:<br>.X = ±.2 [5.08]<br>.XX = ±.02 [51]<br>.XXX = ±.005 [13] | APPROVALS                     | DATE     |  45 BEECHWOOD DRIVE<br>NORTH ANDOVER, MA<br>01845 |                          |                                 |                  |
|  | DRAWN BY<br>D.FRISIELLO       | 10/23/13 |  |                          |                                 |                  |
|  | CHECKED BY<br>D.GUTTADAURO    | 10/23/13 | CATEGORY   | TELECOM/MODULAR          |                                 |                  |
|  | APPROVED BY<br>D. GALLAGHER   | 10/23/13 | PRODUCT DESCRIPTION  |                          |                                 |                  |
| CONFIGURATION DETAILS OF<br>UNDIMENSIONED FEATURES<br>MAY VARY   |                               |          | C6A SHLD 90° KEYSTONE CPLR   |                          |                                 |                  |
| PROJECTION<br>  | COLOR VARIATIONS<br>MAY OCCUR |          | SIZE<br><b>A</b>   | FSCM NO.<br><b>43321</b> | DWG. NO.<br>TDG1026KS-RC6A      | REV.<br><b>A</b> |
|  |                               |          | SCALE: NONE  |                          | CAD FILE: TDG1026KS-RC6A.SLDDRW | SHEET 1 OF 1     |