


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	2/23/18	D.FRISIELLO
B	ECN 10610 CLARIFY BURN RATING ON CERTS	08/28/20	DGUTTADAURO

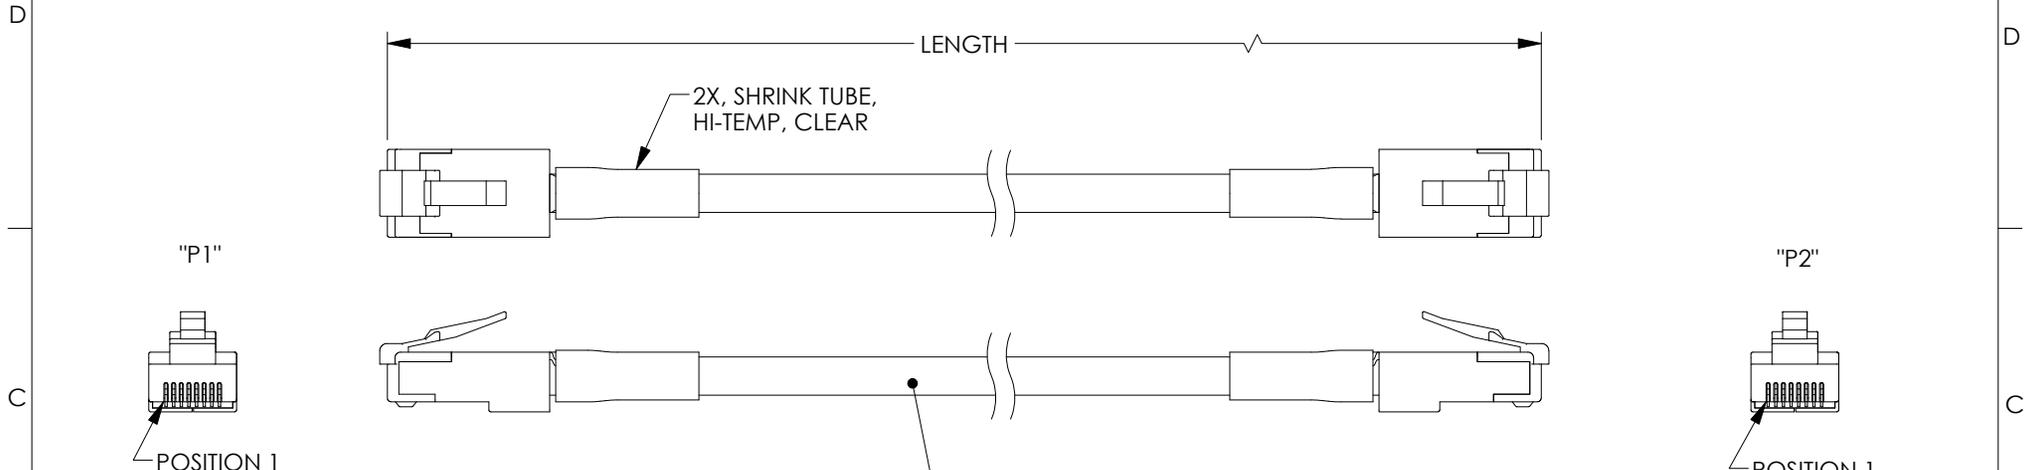

2X RJ45 (8P8C) SHIELDED PLUG

MODEL NUMBER	LENGTH FEET [METERS]
TRA5261S-1F	1.0 [.30]
TRA5261S-2F	2.0 [.61]
TRA5261S-3F	3.0 [.91]
TRA5261S-5F	5.0 [1.52]
TRA5261S-10F	10.0 [3.05]
TRA5261S-15F	15.0 [4.57]
TRA5261S-25F	25.0 [7.62]
TRA5261S-50F	50.0 [15.24]
TRA5261S-75F	75.0 [22.86]
TRA5261S-100F	100.0 [30.48]
TRA5261S-125F	125.0 [38.10]
TRA5261S-150F	150.0 [45.72]
TRA5261S-175F	175.0 [53.34]
TRA5261S-200F	200.0 [60.96]


4TP, CAT 5e, 26AWG STRANDED SILVER PLATED COPPER WITH ALUM/POLY FOIL SHIELD AND ROUND TINNED PLATED COPPER BRAID, (85% MIN. COVERAGE). JACKET: FEP, BLUE  
 OPERATING TEMPERATURE RANGE: -55 °C TO +150 °C  
 NOM. DIA: .205 [5.21], MIN. BEND RAD: 1.0" [25.4]

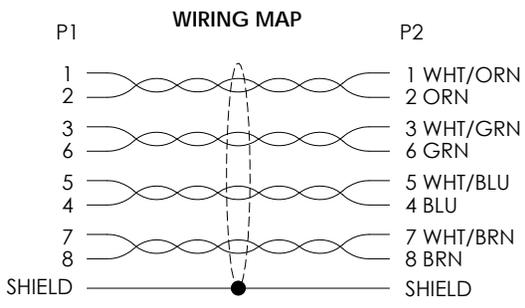

**NOTES:**



- FIRE PROPERTIES FEP JACKET: (FST)  
 WILL MEETS OR EXCEEDS THE APPLICABLE REQUIREMENTS OF FAR 25.869, FAR 25.853, ABD0031, AND D6-51377;  
 SEPERATE TESTING AND QUALIFICATION MAT BE REQUIRED FOR YOUR APPLICATION AS CERTIFICATION AUTHORITY AND DOCUMENTATION DOES NOT RESIDE WITH L-COM.
1. LENGTHS OVER 10 METERS (32.8 FT) ARE CHANNEL RATED.
  2. PLUG CONFORMS TO TIA-1096.
  3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
  4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0	DRAWN BY D.FRISIELLO	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [.5]   ANGLES ± 1° .XXX = ± .005 [.13]	CHECKED BY D.GUTTADAURO	2/23/18	CATEGORY <b>TELECOM/MODULAR</b>
	APPROVED BY D.GUTTADAURO	2/23/18	
THIRD-ANGLE PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>   CAGE CODE <b>43321</b>   DWG. NO. <b>TRA5261S</b>   REV. <b>B</b>
SCALE: NONE		CAD FILE: TRA5261S.SLDDRW	
			SHEET 1 OF 1