
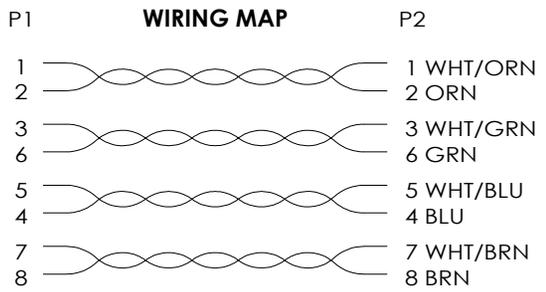


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/13/15	D.GRIFFIN
B	ECN 9867: CONDUCTOR WAS TINNED COPPER, REM RgHS, UPD DWG FORMAT	05/21/19	DGALLAGHER

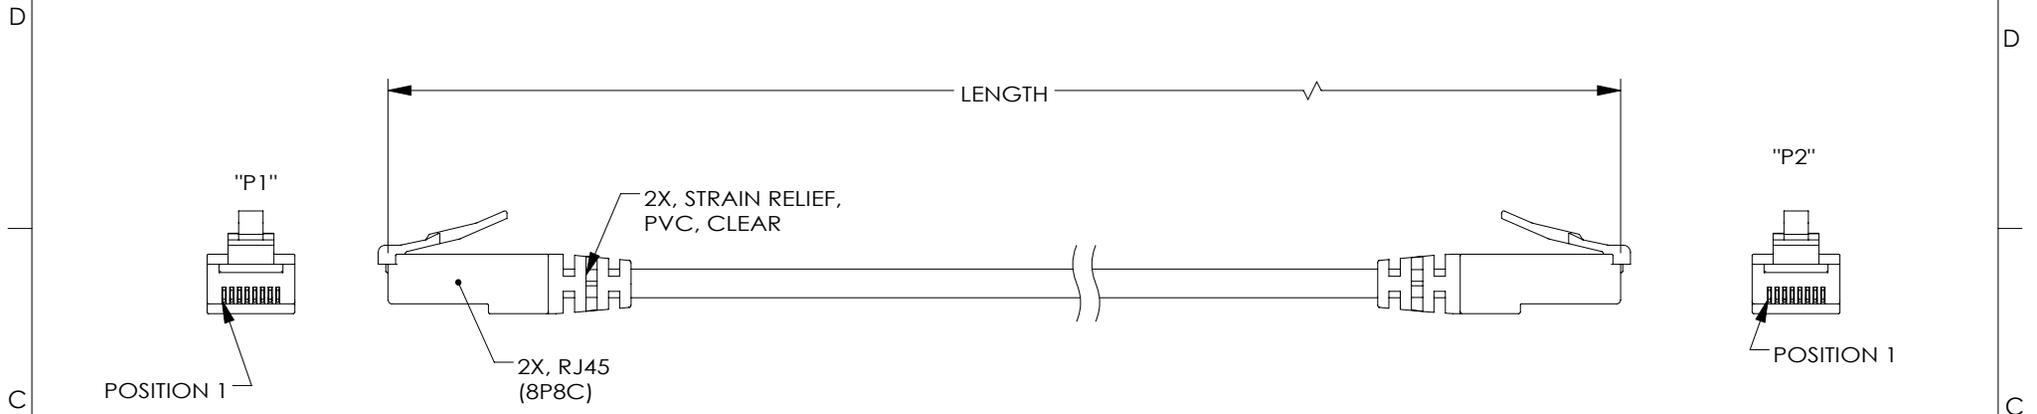

MODEL NUMBER	LENGTH FEET [METERS]
TRD628BL-1	1.0 [.30]
TRD628BL-3	3.0 [.91]
TRD628BL-5	5.0 [1.52]
TRD628BL-7	7.0 [2.13]
TRD628BL-10	10.0 [3.05]
TRD628BL-14	14.0 [4.26]

**NOTES:**

**MATERIAL:**  
 PLUG HOUSING: POLYCARBONATE, CLEAR, UL94V-0  
 CONTACTS: PHOSPHOR BRONZE  
 CABLE JACKET: PVC, BLUE

**FINISH:**  
 CONTACTS: 50 μINCHES GOLD IN CONTACT AREA  
 OVER 100 μINCHES NICKEL PLATE OVERALL

**CABLE CHARACTERISTICS:**  
 FOUR TWISTED PAIR, CAT 6 MODULAR CABLE  
 CONDUCTORS: 28 AWG STRANDED BARE COPPER

**MISCELLANEOUS:**  
 PLUG CONFORMS TO TIA-1096.  
 OPERATING TEMPERATURE RANGE: -20°C [-4°F] TO 75°C [167°F].  
 CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.  
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		50 HIGH STREET NORTH ANDOVER, MA 01845		
	DRAWN BY D.FRISIELLO	7/29/15				
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ±.005 [1.13]	CHECKED BY D.GUITADAURO	11/6/15	CATEGORY TELECOM/MODULAR			
	APPROVED BY D.GALLAGHER	11/6/15	PRODUCT DESCRIPTION CA CAT6 28AWG RJ45 BLU			
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. TRD628BL	REV. <b>B</b>
			SCALE: NONE	CAD FILE: TRD628BL.SLDDRW	SHEET 1 OF 1	