





THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	04/01/2019	DFRISIELLO

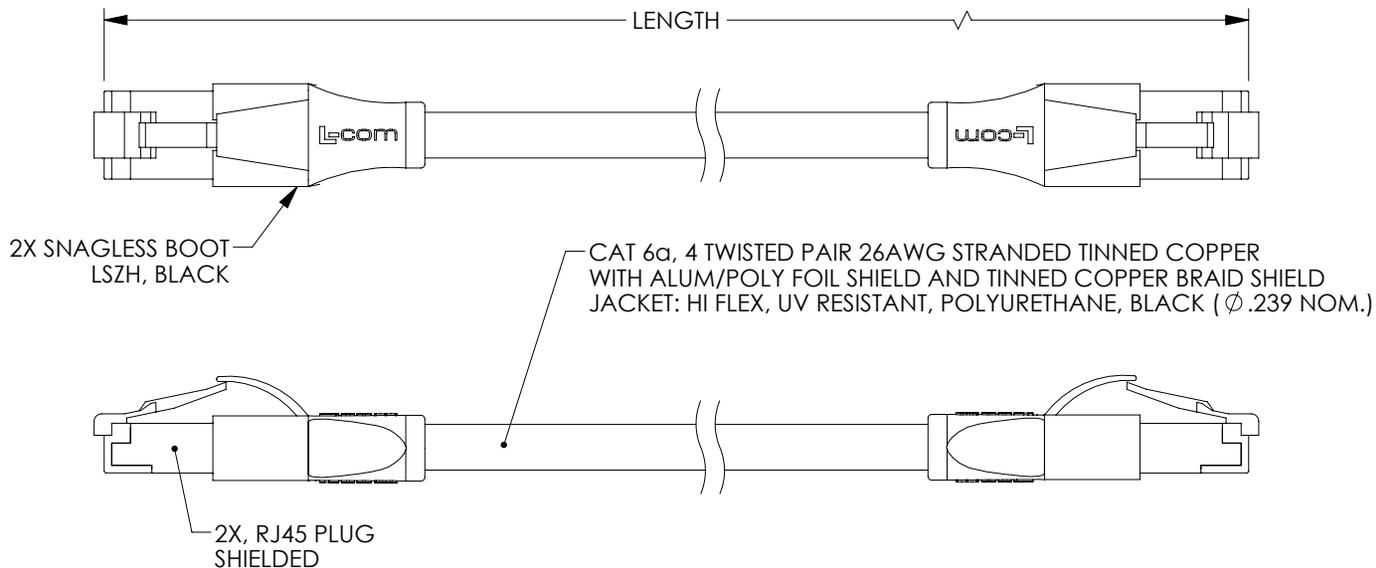

MODEL NUMBER	LENGTH FEET [METERS]
TRD695AHFP-BLK-1	1.0 [.30]
TRD695AHFP-BLK-2	2.0 [.61]
TRD695AHFP-BLK-3	3.0 [.91]
TRD695AHFP-BLK-5	5.0 [1.52]
TRD695AHFP-BLK-10	10.0 [3.05]
TRD695AHFP-BLK-15	15.0 [4.57]
TRD695AHFP-BLK-25	25.0 [7.62]
TRD695AHFP-BLK-50	50.0 [15.24]
TRD695AHFP-BLK-75	75.0 [22.86]
TRD695AHFP-BLK-100	100.0 [30.48]
TRD695AHFP-BLK-125	125.0 [38.10]
TRD695AHFP-BLK-150	150.0 [45.72]

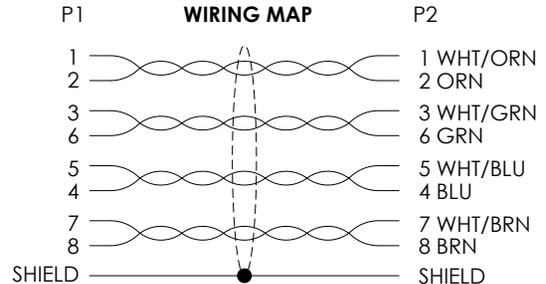

CABLE CHARACTERISTICS:
 VOLTAGE RATING: 300V
 TEMPERATURE RANGE: -40° C TO +75° C

NOTES:
 1. PLUG CONFORMS TO TIA-1096
 2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: $\leq 12 [305] = +1 [25] / -0$ $> 12 [305] \leq 60 [1524] = +2 [51] / -0$ $> 60 [1524] \leq 120 [3048] = +4 [102] / -0$ $> 120 [3048] \leq 300 [7620] = +6 [152] / -0$ $> 300 [7620] = +5\% / -0\%$	APPROVALS	DATE	50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY DFRISIELLO	03/28/2019	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [5.1] .XXX = ± .005 [1.3]	CHECKED BY DGUTTADAURO	03/28/2019	CATEGORY TELECOM/MODULAR
	APPROVED BY DGUTTADAURO	03/28/2019	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	SIZE A	PRODUCT DESCRIPTION RJ45 C6A SF/UTP 26STR PUR BLK HI FLEX OUTDOOR 300V
	COLOR VARIATIONS MAY OCCUR	FSCM NO. 43321	DWG. NO. TRD695AHFP-BLK
		SCALE: NONE	CAD FILE: TRD695AHFP-BLK.SLDDRW SHEET 1 OF 1