
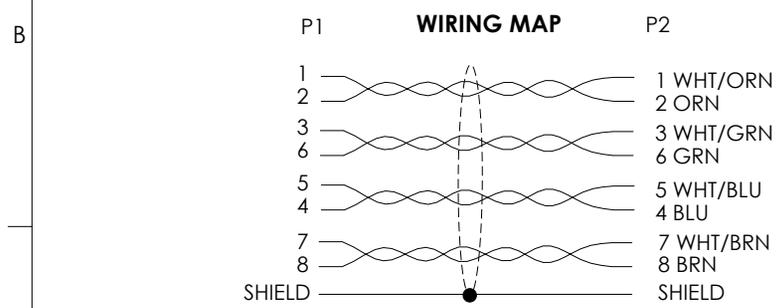


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	02/28/2018	DGUTTADAUR
B	ECN 9794:CBL JACKET CHANGED TO PVC,BLACK,OD WAS 5.8 MM,REM RoHS	04/24/2019	DGUTTADAUR

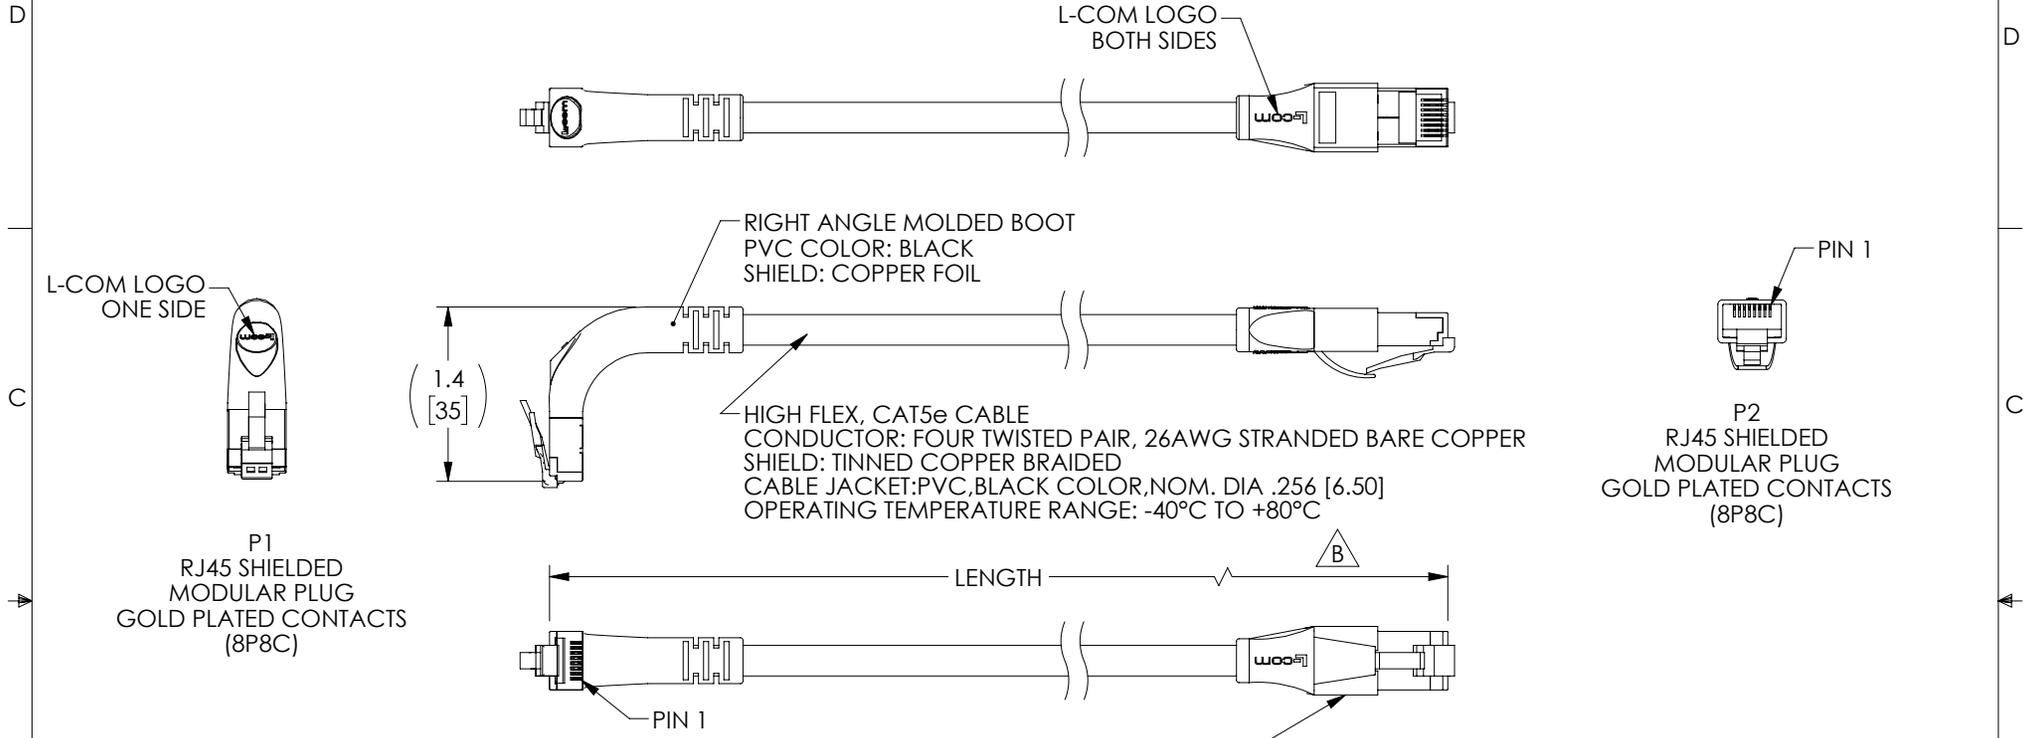

PART NUMBER	LENGTH	
	FEET	METERS
TRD855SRA2DBL-05M	1.64	0.5
TRD855SRA2DBL-1M	3.28	1.0
TRD855SRA2DBL-2M	6.56	2.0
TRD855SRA2DBL-3M	9.84	3.0
TRD855SRA2DBL-4M	13.12	4.0
TRD855SRA2DBL-5M	16.41	5.0
TRD855SRA2DBL-10M	32.82	10.0

**NOTES:**

1. PLUG CONFORMS TO TIA-1096
2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]

OVERALL CABLE LENGTH TOLERANCE:  
 $\leq 12 [305] = +1 [25] / -0$   
 $>12 [305] \leq 60 [1524] = +2 [51] / -0$   
 $>60 [1524] \leq 120 [3048] = +4 [102] / -0$   
 $>120 [3048] \leq 300 [7620] = +6 [152] / -0$   
 $>300 [7620] = +5\% / -0\%$

ALL OTHER DIMENSIONAL TOLERANCES:  
 $.X = \pm .2 [5.08]$   
 $.XX = \pm .02 [5.1]$   
 $.XXX = \pm .005 [1.3]$

APPROVALS

DATE

DRAWN BY DCUI 02/03/2018

CHECKED BY BZHANG 02/03/2018

APPROVED BY SPAN 02/03/2018

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

PROJECTION

**L-com** Global Connectivity

50 HIGH STREET  
NORTH ANDOVER, MA  
01845

CATEGORY TELECOM/MODULAR

PRODUCT DESCRIPTION  
C5e RJ45 S/UTP STR-UP 26STR PVC HIFLX BLK

SIZE **A** FSCM NO. **43321** DWG. NO. TRD855SRA2DBL REV. **B**

SCALE: NONE CAD FILE: TRD855SRA2DBL.SLDDRW SHEET 1 OF 1