



8 7 6 5 4 3 2 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	1/3/12	D.GRIFFIN
B	ECN 7587: SHOWED LANYARD ON CABLE	9/3/14	D. CASTRO

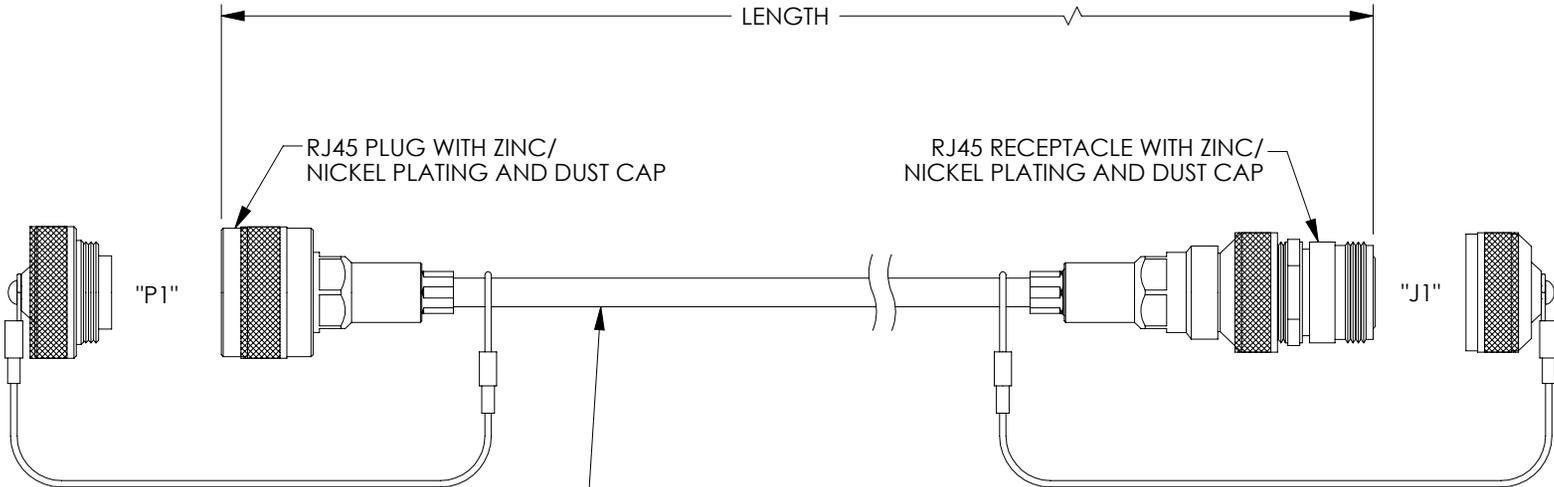

HIGH FLEX, CAT 5e SHIELDED TWISTED PAIR
 24AWG STRANDED TINNED COPPER WITH
 ALUM/POLY FOIL SHIELD AND TINNED
 COPPER BRAID.
 JACKET: THERMOPLASTIC ELASTOMER, BLACK

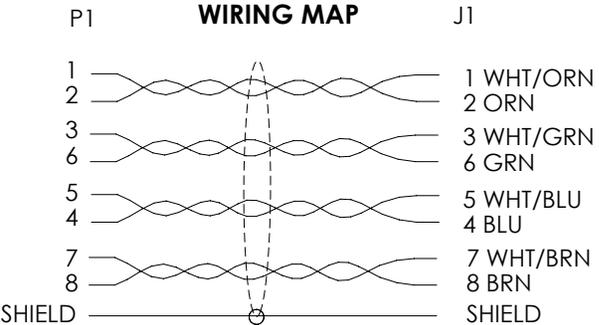

MODEL NUMBER	LENGTH METERS [FEET]
TRD8RG5-01	1.0 [3.28]
TRD8RG5-02	2.0 [6.56]
TRD8RG5-03	3.0 [9.84]
TRD8RG5-05	5.0 [16.41]
TRD8RG5-10	10.0 [32.81]

NOTES:

CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.

CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

PRODUCT IS NOT RoHS COMPLIANT WHEN ZINC/NICKEL PLATING IS PRESENT.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D.FRISIELLO	11/28/12		
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ±.005 [1.3]	CHECKED BY D.GUITADAURO	11/28/12	CATEGORY TELECOM/MODULAR	
	APPROVED BY D.GALLAGHER	11/28/12	PRODUCT DESCRIPTION IP68 RGRJ45 P/J ZNNI TPE	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321
			DWG. NO. TRD8RG5	REV. B
			SCALE: NONE	CAD FILE: TRD8RG5.SLDDRW
				SHEET 1 OF 1