



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	1/3/13	D.GRIFFIN
B	ECN 7587: SHOWED LANYARD ON CABLE, UPDATE ROHS	9/3/14	D. CASTRO

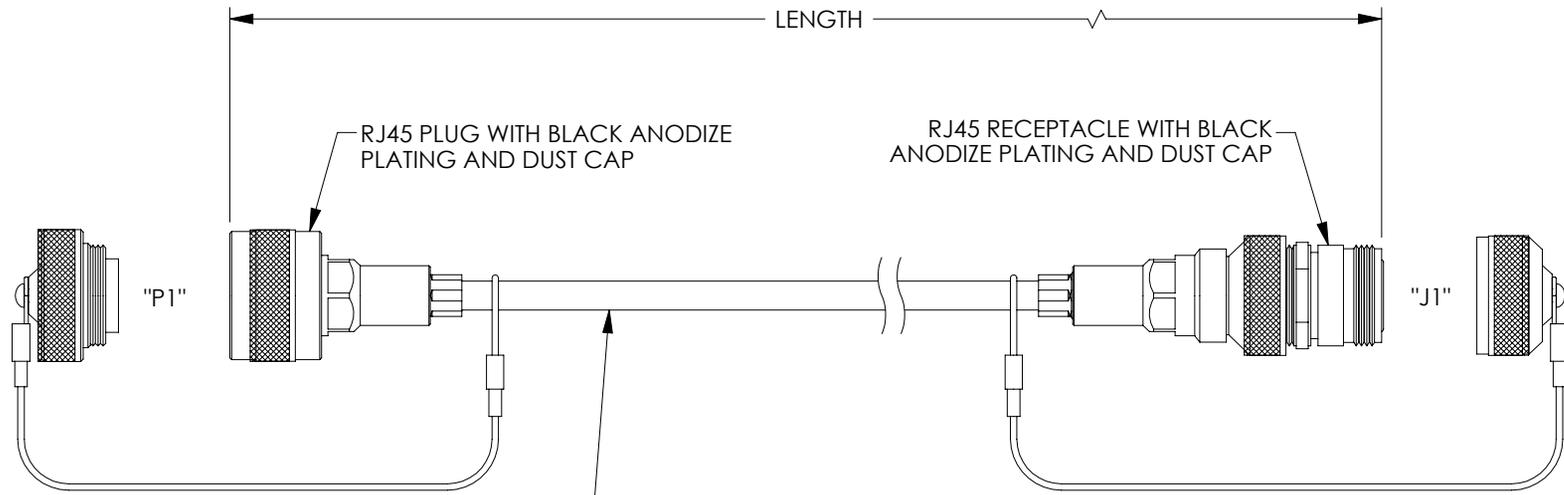

HIGH FLEX, CAT 5e SHIELDED TWISTED PAIR  
 24AWG STRANDED TINNED COPPER WITH ALUM/POLY FOIL SHIELD AND TINNED COPPER BRAID.  
 JACKET: THERMOPLASTIC ELASTOMER, BLACK

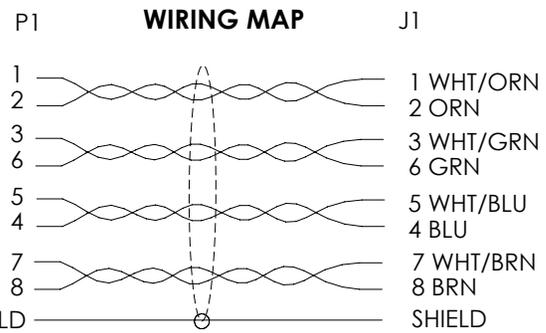

MODEL NUMBER	LENGTH METERS [FEET]
TRD8RG6-01	1.0 [3.28]
TRD8RG6-02	2.0 [6.56]
TRD8RG6-03	3.0 [9.84]
TRD8RG6-05	5.0 [16.41]
TRD8RG6-10	10.0 [32.81]

NOTES:  
 CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.  
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
 CE2011/65/EU (RoHS DIRECTIVE)



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: $\leq 12$ [305] = +1 [25] / -0 $>12$ [305] $\leq 60$ [1524] = +2 [51] / -0 $>60$ [1524] $\leq 120$ [3048] = +4 [102] / -0 $>120$ [3048] $\leq 300$ [7620] = +6 [152] / -0 $>300$ [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ± .005 [1.27]	APPROVALS D.FRISIELLO CHECKED BY D.GUITADAURO APPROVED BY D.GALLAGHER	DATE 11/28/12 11/28/12 11/28/12	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR	CATEGORY <b>TELECOM/MODULAR</b>		PRODUCT DESCRIPTION <b>IP68 RGRJ45 P/J ANOD TPE</b>
PROJECTION 	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>TRD8RG6</b>	REV. <b>B</b>
SCALE: NONE		CAD FILE: TRD8RG6.SLDDRW		SHEET 1 OF 1