
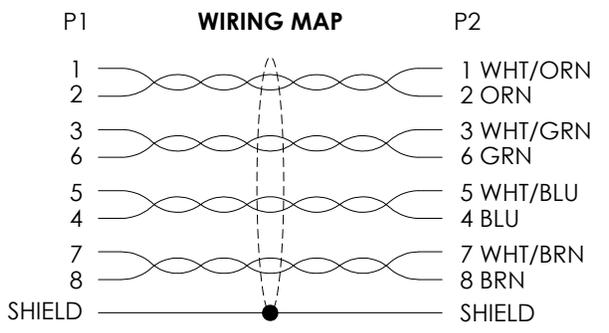


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	9/30/13	D.GRIFFIN
B	ECN 7587: SHOWED LANYARD ON CABLE	9/4/14	D. CASTRO

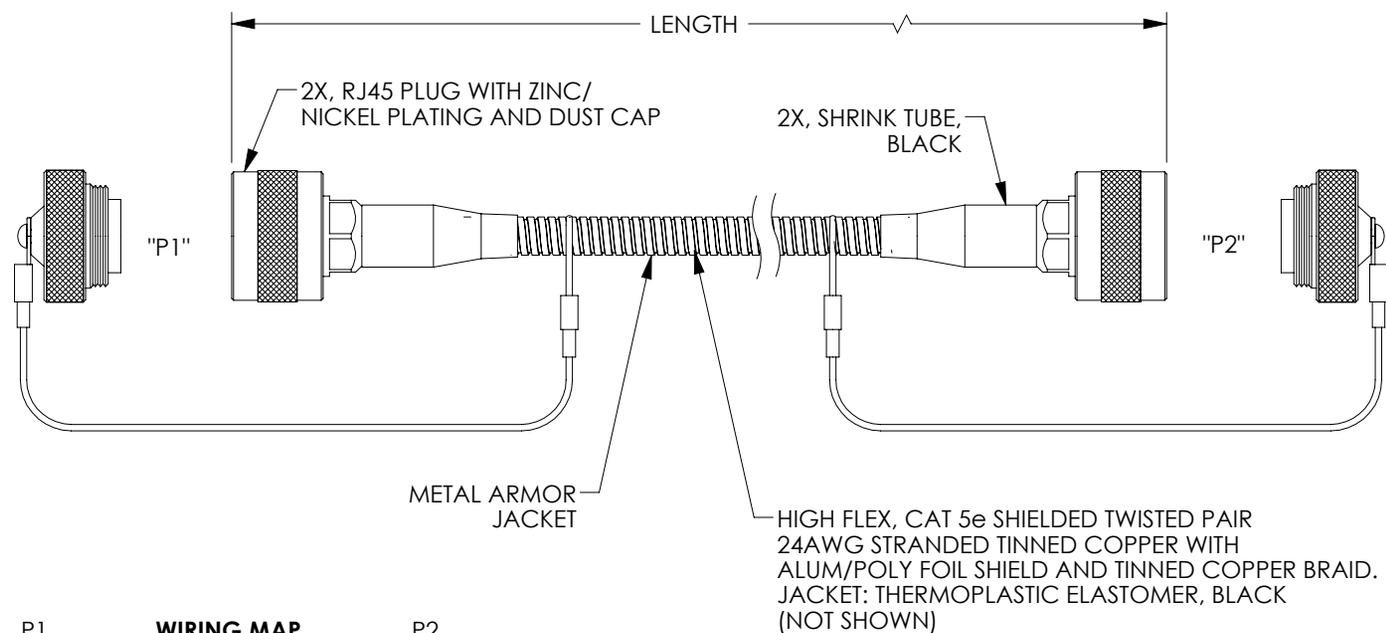

MODEL NUMBER	LENGTH METERS [FEET]
TRD8RGMT1-01	1.0 [3.28]
TRD8RGMT1-02	2.0 [6.56]
TRD8RGMT1-03	3.0 [9.84]
TRD8RGMT1-05	5.0 [16.41]
TRD8RGMT1-10	10.0 [32.81]

NOTES:

CRUSH RESISTANCE (1 INCH SQ. AREA): 1500 POUNDS, MIN.

TEMPERATURE RANGE: -40°C TO +80°C (-40°F TO +176°F)

CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.

CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

PRODUCT IS NOT RoHS COMPLIANT WHEN ZINC/NICKEL PLATING IS PRESENT.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: $\le 12 [305] = +1 [25] / -0$ >12 [305] $\le 60 [1524] = +2 [51] / -0$ >60 [1524] $\le 120 [3048] = +4 [102] / -0$ >120 [3048] $\le 300 [7620] = +6 [152] / -0$ >300 [7620] = +5% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D.FRISIELLO	9/26/13		CATEGORY TELECOM/MODULAR
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [.51] .XXX = ± .005 [0.13]	CHECKED BY D.GUITADAURO	9/26/13	PRODUCT DESCRIPTION IP68 RGRJ45 P/P ZNNI TPE	
PROJECTION 	APPROVED BY D.GALLAGHER	9/26/13	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	SIZE A
	COLOR VARIATIONS MAY OCCUR		FSCM NO. 43321	DWG. NO. TRD8RGMT1
			SCALE: NONE	CAD FILE: TRD8RGMT1.SLDDRW
				SHEET 1 OF 1