


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	4/22/16	D.GRIFFIN

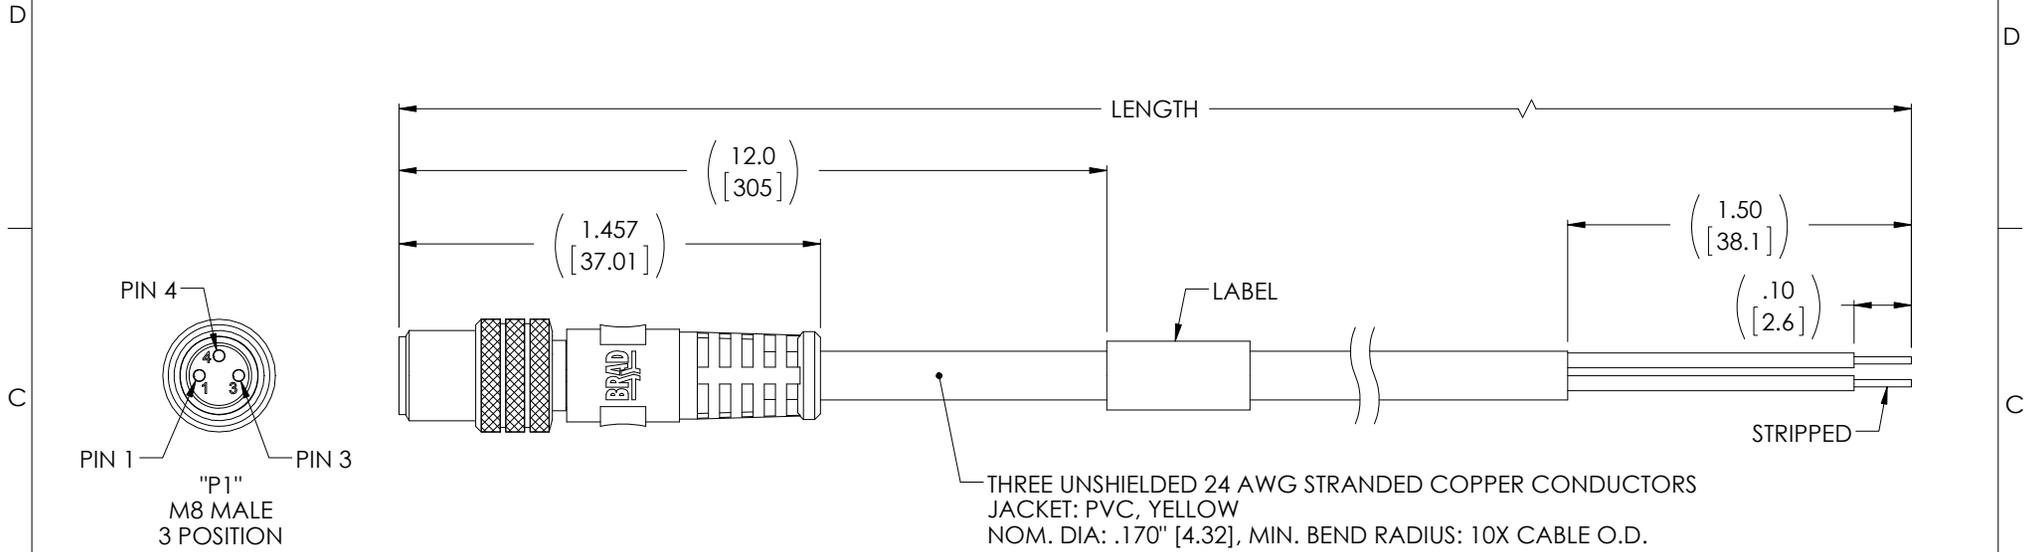

**NOTES:**

**MATERIAL:**  
 MOLDED HOOD: TPE, YELLOW  
 INSULATOR: PUR, BLACK  
 CONTACTS: COPPER ALLOY, GOLD OVER NICKEL PLATE  
 COUPLING NUT: BRASS, NICKEL PLATE  
 LABEL: PLASTIC FILM, BLACK/YELLOW

**ELECTRICAL:**  
 NOMINAL VOLTAGE RATING: 60VAC / 75VDC  
 MAX CURRENT: 4A

**APPLICATION:**  
 INGRESS PROTECTION RATING IS IP68 (MATED)

**ENVIRONMENTAL:**  
 OPERATING TEMPERATURE RANGE: -20°C TO +105°C

**MISCELLANEOUS:**  
 STRIP DIMENSIONS SHOWN ARE FOR REFERENCE ONLY AND MAY VARY.  
 MINIMUM LABEL INFO INCLUDES PART NUMBER, DATE CODE, VOLTAGE AND AMPERAGE.  
 CABLE ASSEMBLIES TO BE TESTED FOR CONTINUITY  
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

WIRING MAP	
"P1"	COLOR
1	BROWN
3	BLUE
4	BLACK

PART NUMBER	LENGTH METERS [FEET]
TRG324-C4Y-1M	1.0 [2.28]
TRG324-C4Y-2M	2.0 [6.56]
TRG324-C4Y-5M	5.0 [16.40]

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [13]	APPROVALS D. DESJARDIN CHECKED BY D. FRIESIELLO APPROVED BY D. GUTTADAURO	DATE 3/30/16 4/11/16 4/20/16	50 HIGH STREET NORTH ANDOVER, MA 01845	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			CATEGORY <b>TELECOM/MODULAR</b>
	PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>
	PRODUCT DESCRIPTION <b>3-POLE M8DM-CE PVC 24 YEL</b>		DWG. NO. <b>TRG324-C4Y</b>	REV. <b>A</b>
SCALE: NONE		CAD FILE: TRG324-C4Y.SLDDRW	SHEET 1 OF 1	

D  
C  
B  
A

D  
C  
B  
A

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1