
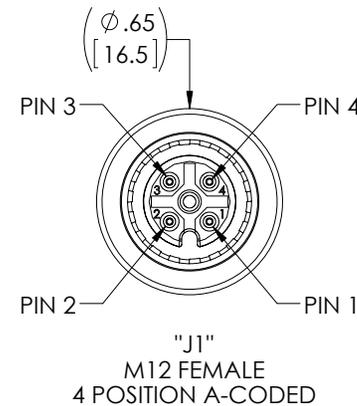
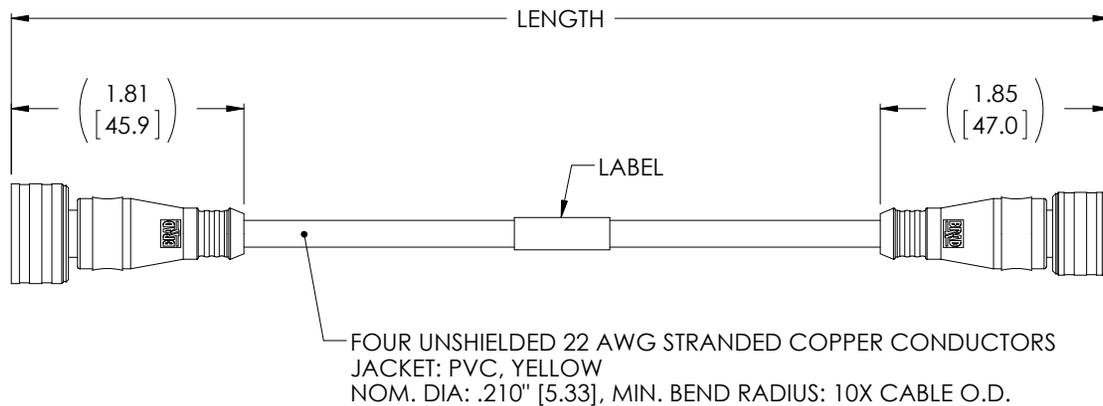


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	4/22/16	D.GRIFFIN

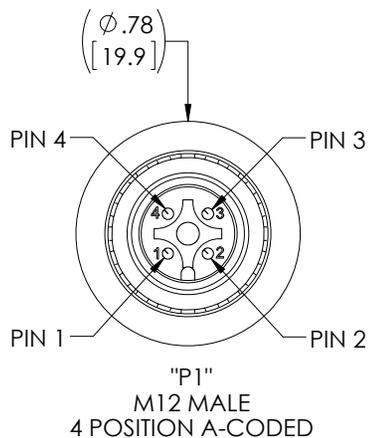

NOTES:

MATERIAL:

MOLDED HOOD: PUR, YELLOW
INSULATOR: PUR, BLACK
CONTACTS: COPPER ALLOY, GOLD OVER NICKEL PLATE
COUPLING NUT: BRASS, NICKEL PLATE
O-RING: VITON, GREEN
LABEL: PLASTIC FILM, BLACK/YELLOW

ELECTRICAL:

NOMINAL VOLTAGE RATING: 250 VAC/VDC
MAX CURRENT: 4A

APPLICATION:

INGRESS PROTECTION RATING IS IP67/68/69K (MATED)

ENVIRONMENTAL:

OPERATING TEMPERATURE RANGE: -20°C TO +105°C

MISCELLANEOUS:

MINIMUM LABEL INFO INCLUDES PART NUMBER, DATE CODE, VOLTAGE AND AMPERAGE.
CABLE ASSEMBLIES TO BE TESTED FOR CONTINUITY
CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

WIRING MAP

"P1"	COLOR	"J1"
1	BROWN	1
2	WHITE	2
3	BLUE	3
4	BLACK	4

PART NUMBER	LENGTH METERS [FEET]
TRG423-C2Y-1M	1.0 [3.28]
TRG423-C2Y-2M	2.0 [6.56]
TRG423-C2Y-5M	5.0 [16.40]

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [5.1] .XXX = ±.005 [1.3]	APPROVALS	DATE		50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY D. DESJARDIN	3/30/16		CATEGORY TELECOM/MODULAR
	CHECKED BY D. FRISIELLO	4/11/16	PRODUCT DESCRIPTION 4-POLE M12A M/F PVC 22 YEL	SCALE: NONE CAD FILE: TRG423-C2Y.SLDDRW SHEET 1 OF 1
	APPROVED BY D. GUTTADAURO	4/20/16		
SIZE A FSCM NO. 43321 DWG. NO. TRG423-C2Y REV. A				