





THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	5/16/16	D.GRIFFIN
B	ECN 11467: ADD 15M LENGTH TO TABLE AND FLEX LIFE TO ENVIRONMENTAL NOTE	10/28/21	GUTTA DAURO

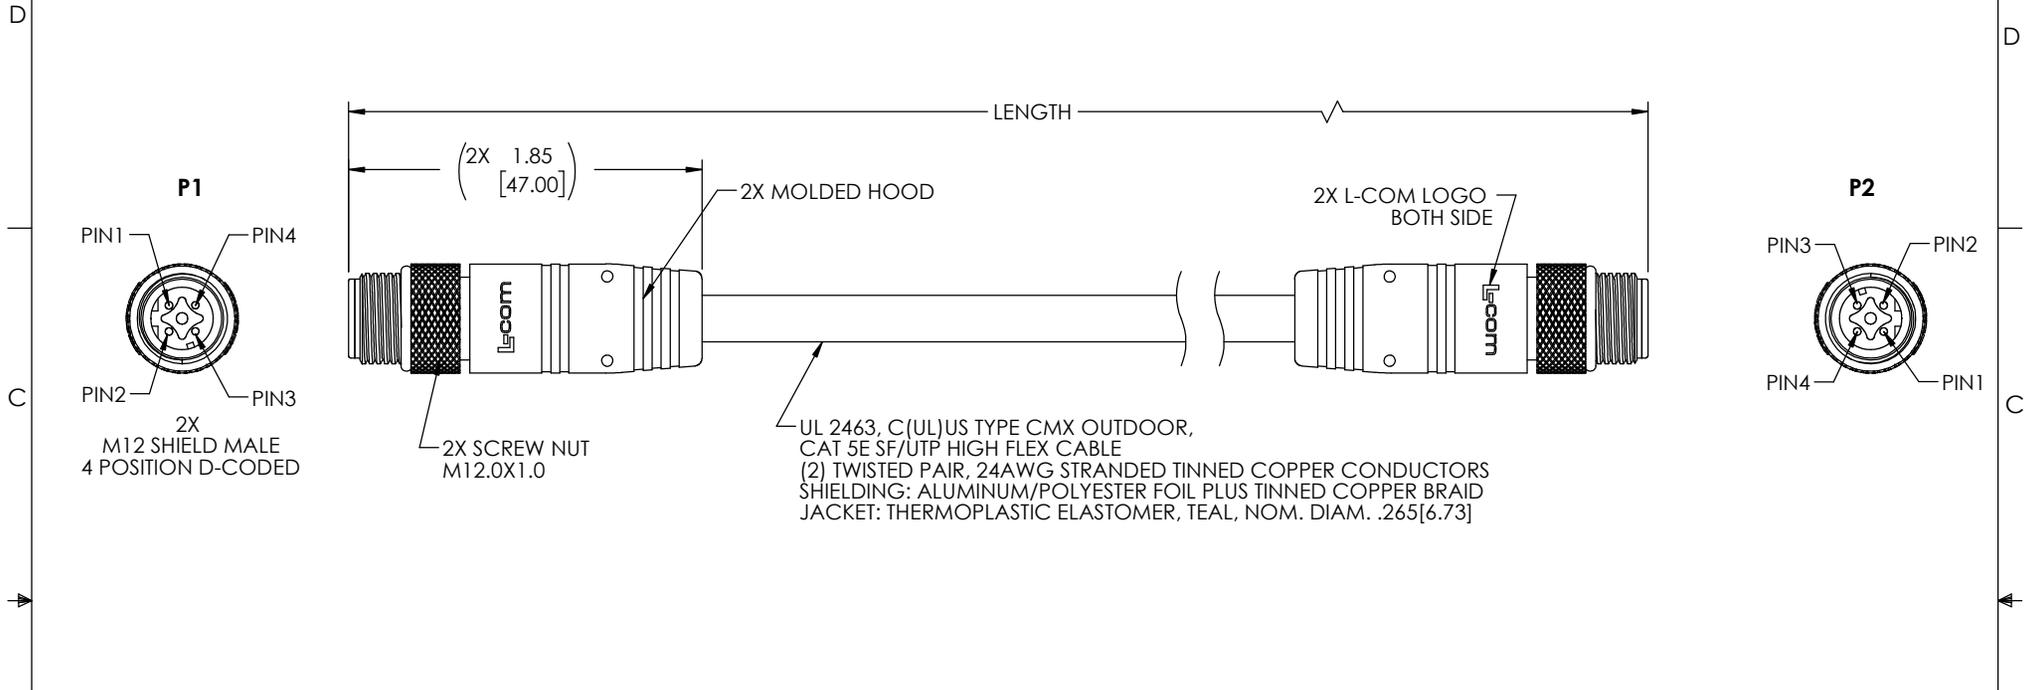

UL 2463, C(UL)US TYPE CMX OUTDOOR,
CAT 5E SF/UTP HIGH FLEX CABLE
(2) TWISTED PAIR, 24AWG STRANDED TINNED COPPER CONDUCTORS
SHIELDING: ALUMINUM/POLYESTER FOIL PLUS TINNED COPPER BRAID
JACKET: THERMOPLASTIC ELASTOMER, TEAL, NOM. DIAM. .265[6.73]

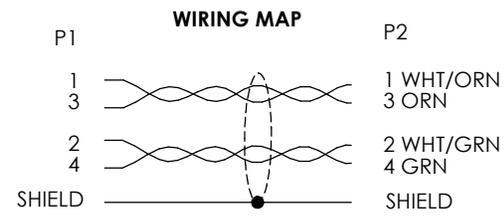

PART NUMBER	LENGTH	
	FEET	METERS
TRG501-T4T-05M	1.64	0.5
TRG501-T4T-1M	3.28	1.0
TRG501-T4T-2M	6.56	2.0
TRG501-T4T-3M	9.84	3.0
TRG501-T4T-5M	16.41	5.0
TRG501-T4T-10M	32.82	10.0
TRG501-T4T-15M	49.22	15.0


NOTES
MATERIAL:
MOLDED HOOD: THERMOPLASTIC POLYURETHANE, BLACK
INSULATOR: NYLON, BLACK
SHELL/SCREW NUT: BRASS, NICKEL PLATE
CONTACTS: PHOSPHOR BRONZE, 15µ" MIN. GOLD PLATE

ELECTRICAL:
NOMINAL VOLTAGE RATING: 250 VAC/VDC
MAX CURRENT: 4A

APPLICATION:
INGRESS PROTECTION RATING IS IP68 (MATED).

ENVIRONMENTAL:
OPERATING TEMPERATURE RANGE: -40°C TO +80°C
CABLE JACKET RESISTANCE: OIL, SUNLIGHT, AND WELD SPLATTER RESISTANT
CABLE FLEX LIFE: 1 MILLION CYCLE TEST (10X CABLE OD)
10 MILLION CYCLE TEST (20X CABLE OD)

MISCELLANEOUS
CABLE ASSEMBLIES TO BE TESTED FOR CONTINUITY
CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS	DATE	 an INFINITI® brand 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	DRAWN BY D.CUI	01/05/16	
	APPROVED BY D. GUTTA DAURO	03/10/16	CATEGORY TELECOM/MODULAR
THIRD-ANGLE PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION C5E M12D M/M TPE 24 TEL	
COLOR VARIATIONS MAY OCCUR	SIZE A	CAGE CODE 43321	DWG. NO. TRG501-T4T
REF	SCALE: NONE	CAD FILE: TRG501-T4T.SLDDRW	REV. B