
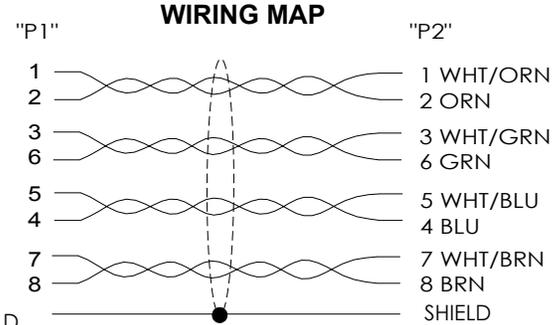


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	5/16/16	D.GRIFFIN

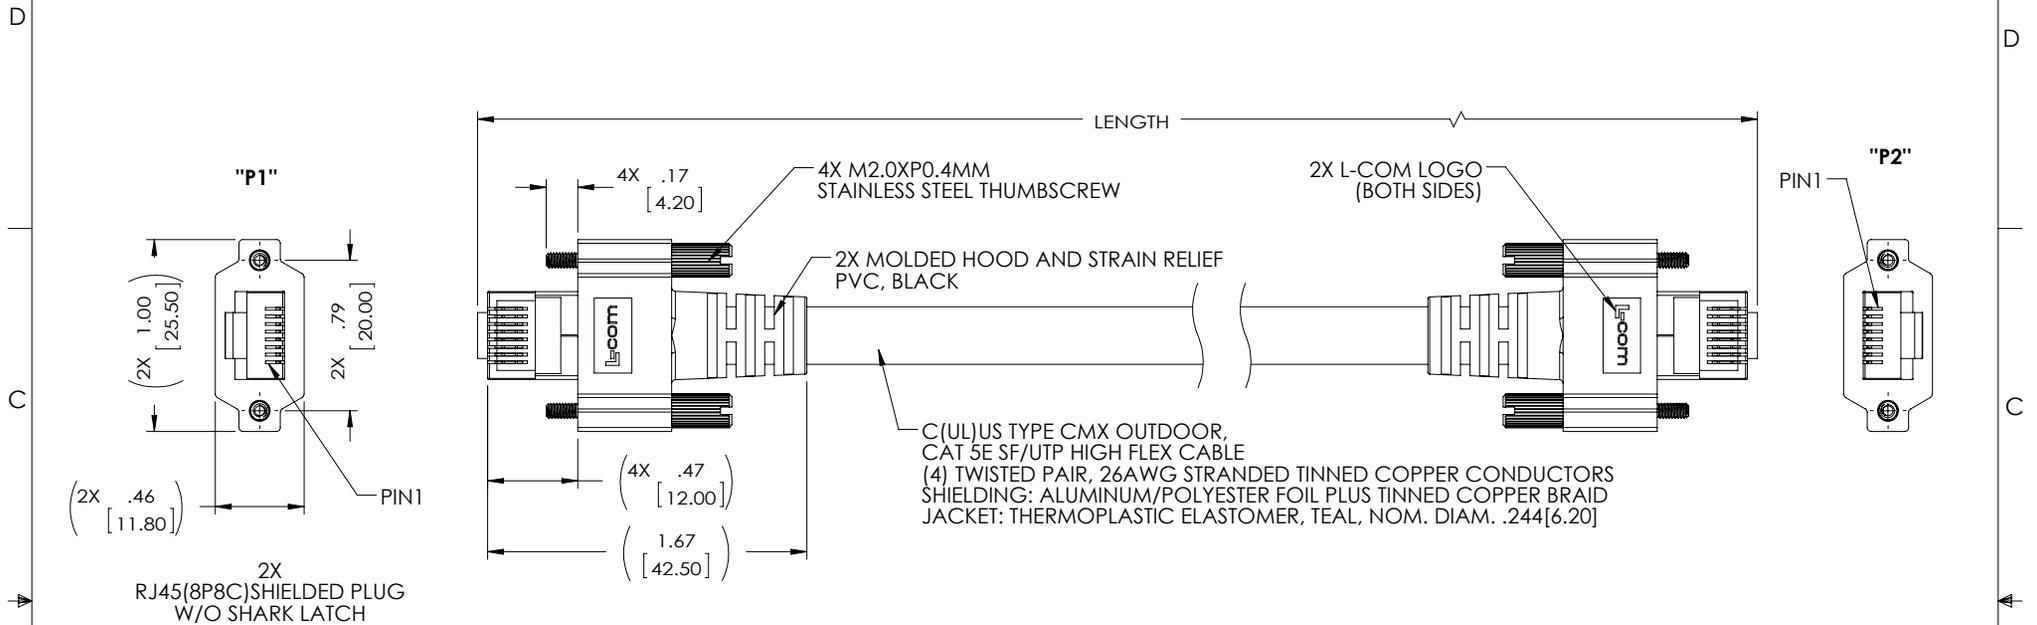

PART NUMBER	LENGTH	
	FEET	METERS
TRG513-T6T-1M	3.28	1.0
TRG513-T6T-2M	6.56	2.0
TRG513-T6T-3M	9.84	3.0
TRG513-T6T-5M	16.41	5.0
TRG513-T6T-10M	32.82	10.0

NOTES

MATERIAL:
 RJ45 HOUSING: POLYCARBONATE, CLEAR UL96V-0
 RJ45 SHIELD/STRAIN RELIEF: BRASS, 100µ" MIN. NICKEL PLATE
 RJ45 CONTACTS: PHOSPHOR BRONZE (QSN4-3), 50µ" MIN. GOLD PLATE IN CONTACT AREA OVER 100µ" MIN. NICKEL PLATE OVERALL

ELECTRICAL:
 NOMINAL VOLTAGE RATING: 125 VAC/VDC
 MAX CURRENT: 1.5A

ENVIRONMENTAL:
 OPERATING TEMPERATURE RANGE: -10°C TO +60°C
 CABLE JACKET RESISTANCE: OIL, SUNLIGHT, AND WELD SPLATTER RESISTANT

MISCELLANEOUS
 CABLE ASSEMBLIES TO BE TESTED FOR CONTINUITY
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY D.CUI	02/24/16		CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ± .005 [1.3]	CHECKED BY D. DESJARDIN	03/10/16	PRODUCT DESCRIPTION	
PROJECTION	APPROVED BY D. GUTSDAURO	03/10/16	C5E GigE-GigE TPE 26 TEL	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321
REF	SCALE: NONE	CAD FILE: TRG513-T6T.SLDDRW	DWG. NO. TRG513-T6T	REV. A

D
C
B
A

D
C
B
A

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1