



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	02/28/2018	DGUTTADAUR
B	ECN 9794:CBL JACKET CHANGED TO PVC,BLACK,OD WAS 5.8 MM,REM RoHS	04/18/2019	DGUTTADAUR

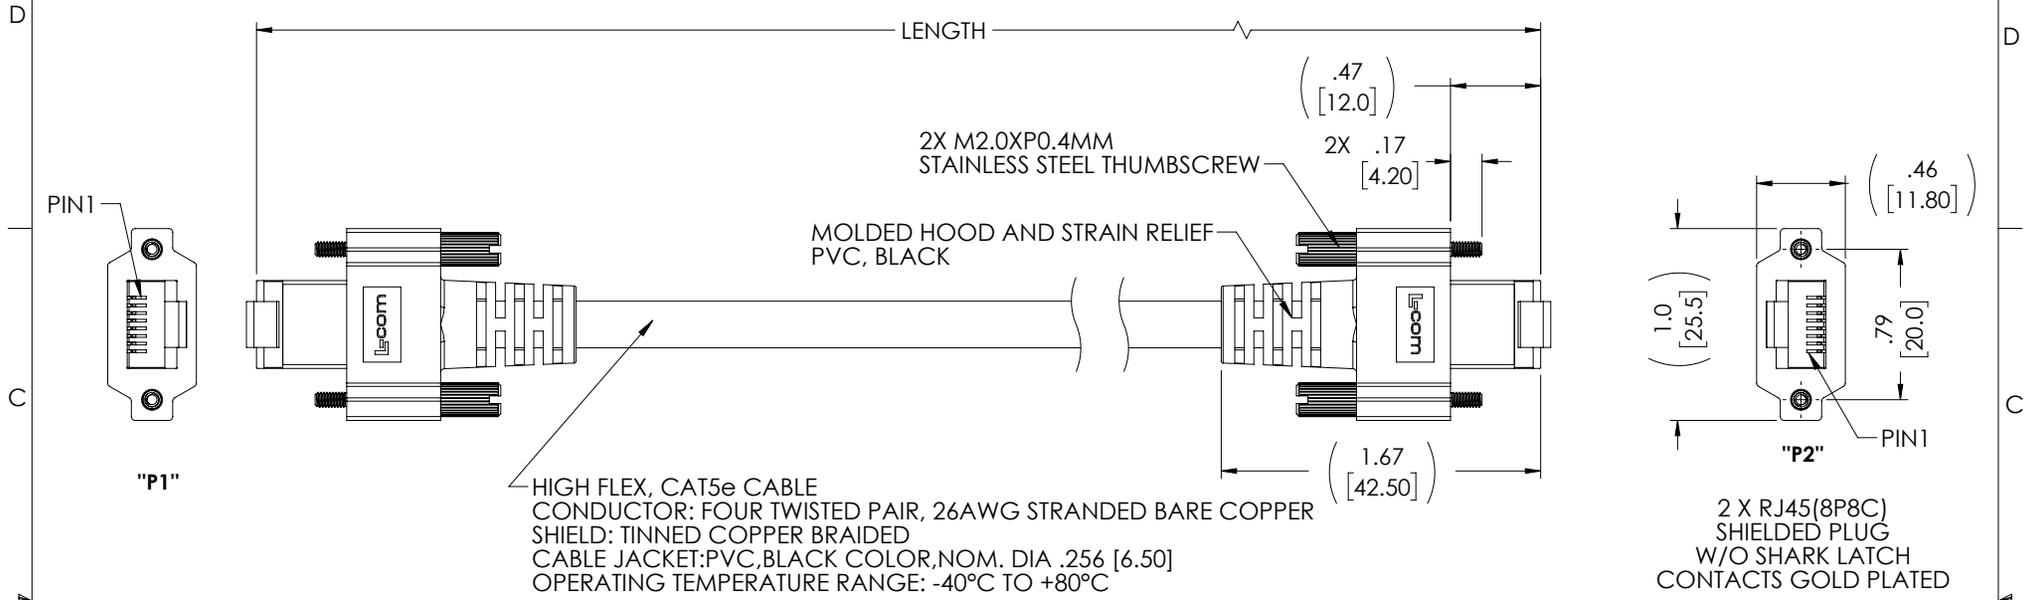

HIGH FLEX, CAT5e CABLE
 CONDUCTOR: FOUR TWISTED PAIR, 26AWG STRANDED BARE COPPER
 SHIELD: TINNED COPPER BRAIDED
 CABLE JACKET:PVC,BLACK COLOR,NOM. DIA .256 [6.50]
 OPERATING TEMPERATURE RANGE: -40°C TO +80°C

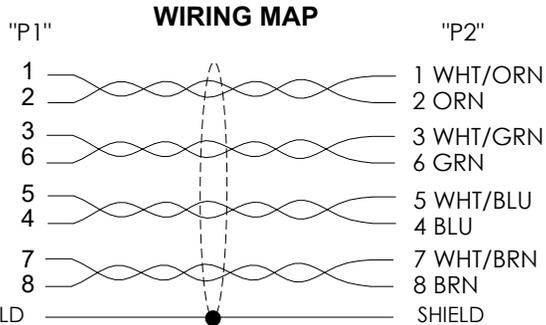

PART NUMBER	LENGTH	
	FEET	METERS
TRG516-P6D-1M	3.28	1.0
TRG516-P6D-2M	6.56	2.0
TRG516-P6D-3M	9.84	3.0
TRG516-P6D-4M	13.12	4.0
TRG516-P6D-5M	16.41	5.0
TRG516-P6D-10M	32.82	10.0

NOTES:

1. PLUG CONFORMS TO TIA-1096
2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]
 OVERALL CABLE LENGTH TOLERANCE:
 ≤12 [305] = +1 [25] / -0
 >12 [305] ≤60 [1524] = +2 [51] / -0
 >60 [1524] ≤120 [3048] = +4 [102] / -0
 >120 [3048] ≤300 [7620] = +6 [152] / -0
 >300 [7620] = +5% / -0%

ALL OTHER DIMENSIONAL TOLERANCES:
 .X = ± .2 [5.08]
 .XX = ± .02 [5.1]
 .XXX = ±.005 [1.3]

PROJECTION

APPROVALS	DATE
DRAWN BY DCUI	02/03/2018
CHECKED BY SLI	02/03/2018
APPROVED BY SPAN	02/03/2018

L-com Global Connectivity
 50 HIGH STREET
 NORTH ANDOVER, MA 01845

CATEGORY: TELECOM/MODULAR

PRODUCT DESCRIPTION: C5e Gige S/UTP 26STR PVC HIFLX BLK

SIZE A	FSCM NO. 43321	DWG. NO. TRG516-P6D	REV. B
---------------	-----------------------	---------------------	---------------

SCALE: NONE CAD FILE: TRG516-P6D.SLDDRW SHEET 1 OF 1