
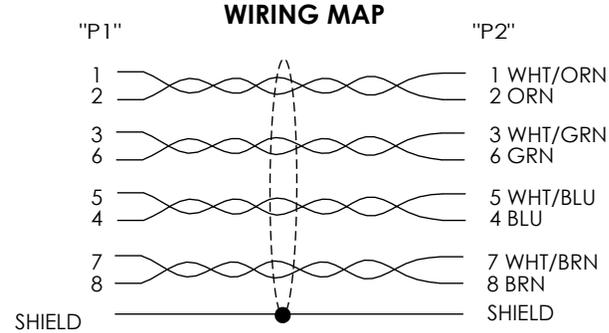


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	5/27/16	D.GRIFFIN

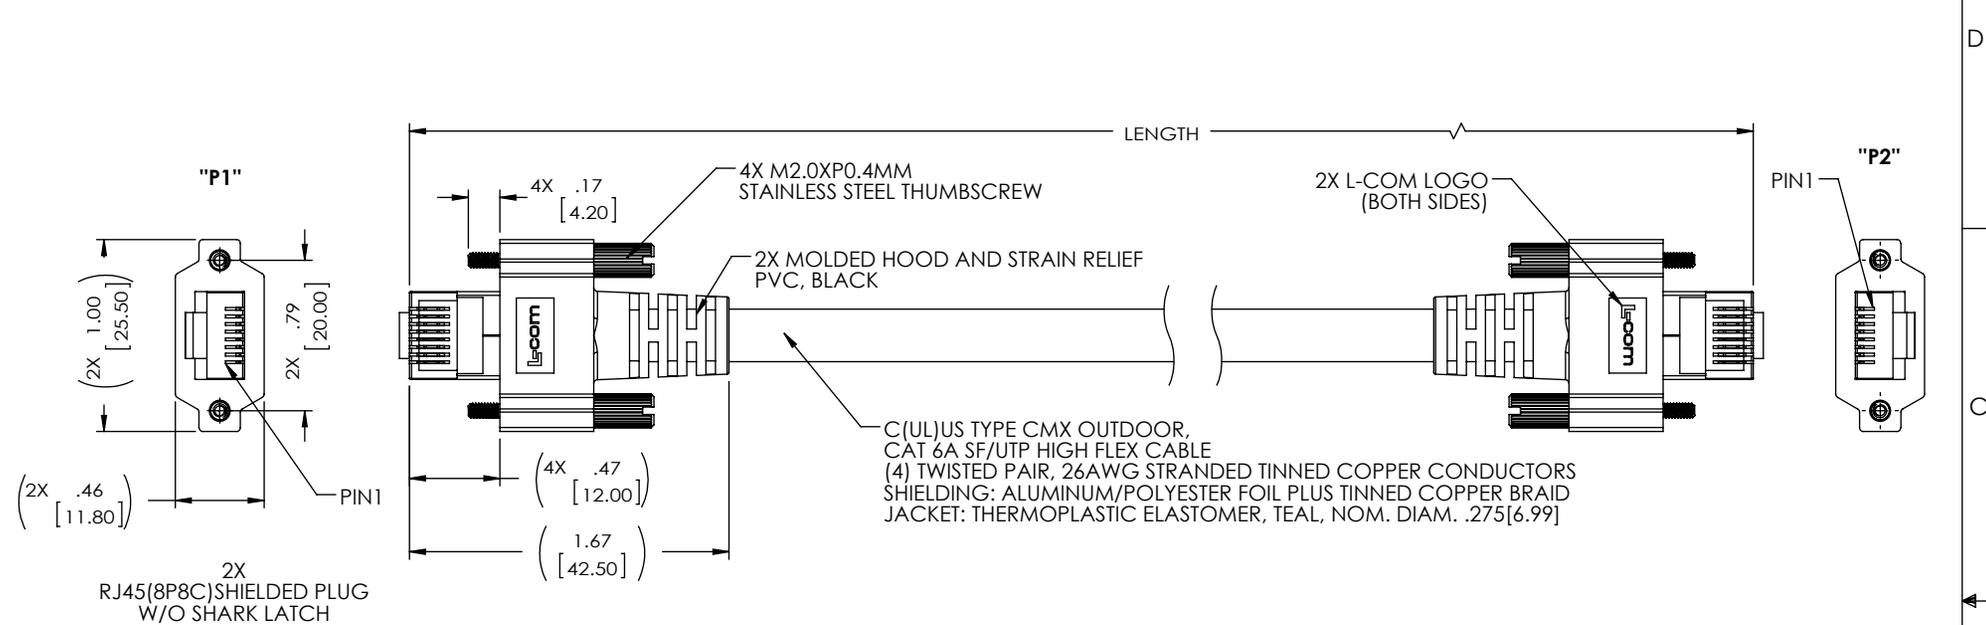

PART NUMBER	LENGTH	
	FEET	METERS
TRG616-T6T-1M	3.28	1.0
TRG616-T6T-2M	6.56	2.0
TRG616-T6T-3M	9.84	3.0
TRG616-T6T-5M	16.41	5.0
TRG616-T6T-10M	32.82	10.0

NOTES

MATERIAL:
 RJ45 HOUSING: POLYCARBONATE, CLEAR UL96V-0
 RJ45 SHIELD/STRAIN RELIEF: BRASS, NICKEL PLATE
 RJ45 CONTACTS: PHOSPHOR BRONZE, 50µ" MIN. GOLD PLATE IN CONTACT AREA OVER, NICKEL PLATE OVERALL

ELECTRICAL:
 NOMINAL VOLTAGE RATING: 125 V AC
 MAX CURRENT: 1.5A

ENVIRONMENTAL:
 OPERATING TEMPERATURE RANGE: -10°C TO +60°C
 CABLE JACKET RESISTANCE: OIL, SUNLIGHT, AND WELD SPLATTER RESISTANT

MISCELLANEOUS
 CABLE ASSEMBLIES TO BE TESTED FOR CONTINUITY
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE	 50 HIGH STREET NORTH ANDOVER, MA 01845 CATEGORY TELECOM/MODULAR PRODUCT DESCRIPTION GigE-GigE TPE 26 TEL		
	DRAWN BY D.CUI	04/26/16			
	CHECKED BY B.ZHANG	04/26/16			
	APPROVED BY S.PAN	04/26/16			
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [1.51] .XXX = ±.005 [1.3]	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A	FSCM NO. 43321	
PROJECTION 	COLOR VARIATIONS MAY OCCUR		DWG. NO. TRG616-T6T	REV. A	
			SCALE: NONE	CAD FILE: TRG616-T6T.SLDDRW	
				SHEET 1 OF 1	