

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	4/1/10	D.GRIFFIN
B	ECN5724: REMOVED PACKAGING NOTE	09/22/11	DFP


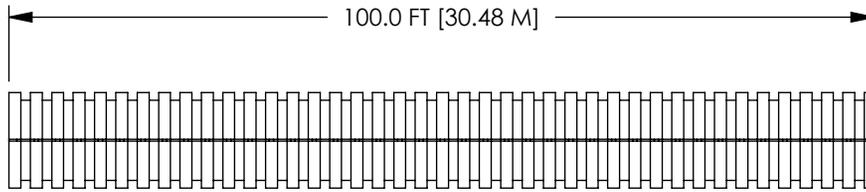


CHART A			
PART NO.	SIZE (IN)	NOM. I.D. (IN)	NOM. O.D. (IN)
TUBSPLT-0.25	1/4	.25	.40
TUBSPLT-0.5	1/2	.50	.70
TUBSPLT-1.0	1.0	1.0	1.27

NOTES:

MATERIAL: NYLON, BLACK

OPERATING TEMPERATURE: -40° C TO +149° C.

TENSILE STRENGTH: 5100 psi ASTM D638.



RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	APPROVALS DRAWN BY D.FRISIELLO	DATE 3/31/10	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	CHECKED BY M.MARTINEZ	3/31/10	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION SPLIT TUBE, BLACK NYLON	
	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321
SCALE: NONE		CAD FILE: TUBSPLT.SLDDRW	
SHEET 1 OF 1			REV. B