

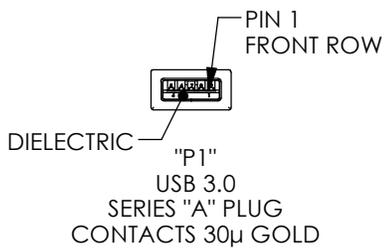


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/22/17	J.LABOY
B	ECN 8837: UPDATE LENGTH	07/04/17	S.LI
C	ECN 10454: UPDATE B PLUG VIEW	04/01/2020	DGUTTADAURO

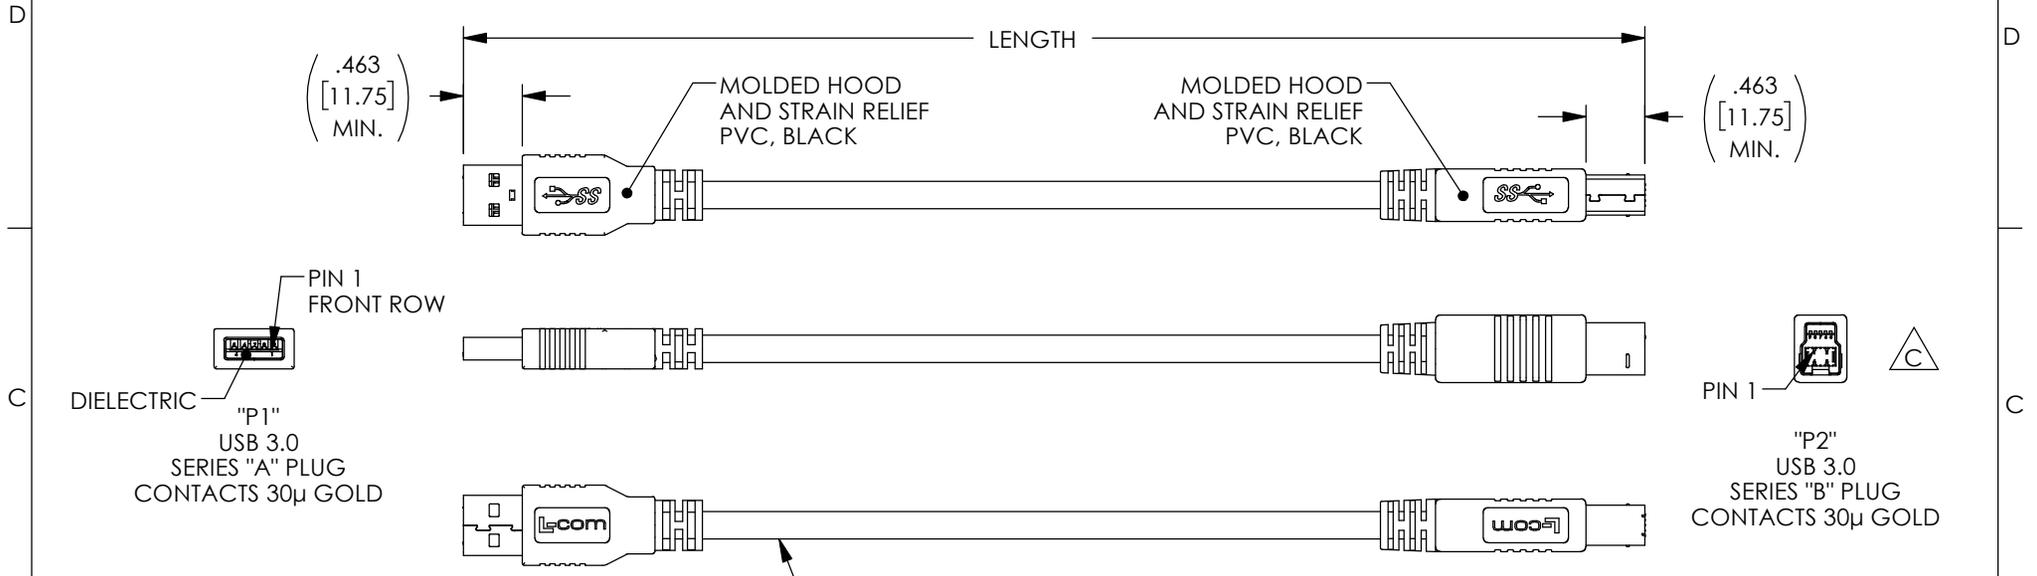

"P1"	WIRING MAP	"P2"
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
5	BLUE	5
6	YELLOW	6
7	DRAIN WIRE	7
8	PURPLE	8
9	ORANGE	9
SHELL	BRAID	SHELL

ONE 30AWG STRANDED (19X42) TINNED COPPER TWISTED PAIR
 TWO 30AWG SHIELDED STRANDED (19X42) TINNED COPPER TWISTED PAIR WITH DRAIN WIRE
 TWO 24AWG STRANDED (41X40) TINNED COPPER CONDUCTORS
 OVERALL ALUMINUM/POLYESTER SHIELD PLUS TINNED COPPER BRAID SHIELD
 JACKET: TPE, BLACK(NOM DIA. .217" [5.5])

PART NUMBER	LENGTH METERS [FEET]
U3A00013-03M	0.3 [.98]
U3A00013-05M	0.5 [1.64]
U3A00013-075M	0.75 [2.46]
U3A00013-1M	1.0 [3.28]
U3A00013-105M	1.5 [4.92]

- NOTES:**
- CABLE IS RATED FOR 10,000 BEND CYCLES, MINIMUM
 - CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 - CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
 - CABLE ASSEMBLY MUST MEET USB 3.0 REQUIREMENTS.
 - CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [5] ANGLES ± 1° .XXX = ± .005 [13]	APPROVALS DRAWN BY S.LI CHECKED BY B.ZHANG APPROVED BY S.PAN	DATE 05/19/2017 05/19/2017 05/19/2017	50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			CATEGORY USB
	THIRD-ANGLE PROJECTION 	COLOR VARIATIONS MAY OCCUR	PRODUCT DESCRIPTION CA,USB3.0 A/B HI-FLEX	SIZE A
	SCALE: NONE		CAGE CODE 43321	DWG. NO. U3A00013
SHEET 1 OF 1			REV. C	