



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



| REVISIONS | | | |
|-----------|-----------------|----------|------------|
| REV | DESCRIPTION | DATE | CHANGED BY |
| A | INITIAL RELEASE | 07/11/17 | JLABOY |
| | | | |
| | | | |




USB3.0 SERIES "A" RECEPTACLE BULKHEAD ADAPTOR CONTACTS: 30 μINCHES GOLD PLATING




RECOMMENDED PANEL CUT OUT

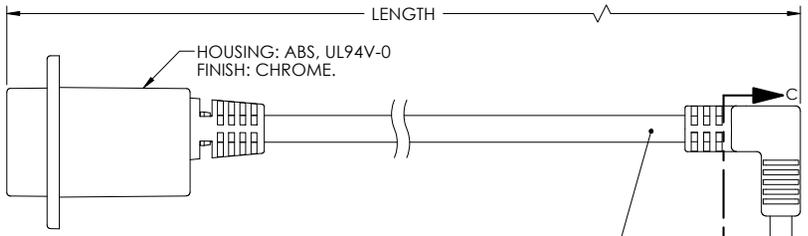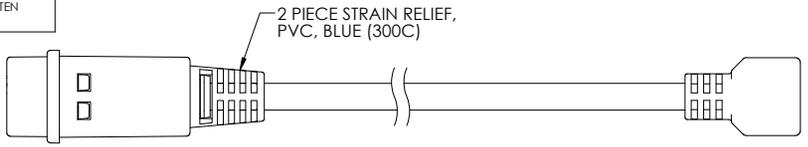


UL 20276,
 (2) SHIELDED TWISTED PAIRS, 30AWG WITH ALUMINUM MYLAR SHIELD STRANDED TINNED COPPER AND DRAIN WIRE,
 (1) UNSHIELDED TWISTED PAIR, 30AWG, STRANDED TINNED COPPER,
 (2) CONDUCTORS, 24AWG, STRANDED TINNED COPPER, WITH ALUM/POLY FOIL SHIELD AND OVERALL BRIAID SHIELD OUTER JACKET: PVC, BLUE (PANTONE 300C)





USB3.0 SERIES "A" PLUG DOWN EXIT CONTACTS: 30 μINCHES GOLD PLATING




MOLDED PVC HOOD, COLOR: BLUE, (PANTONE 300C)



| PART NUMBER | LENGTH | |
|--------------|--------|----------|
| | INCHES | MM |
| U3A00034-12I | 12.0 | [304.8] |
| U3A00034-24I | 24.0 | [609.6] |
| U3A00034-36I | 36.0 | [914.4] |
| U3A00034-50I | 50.0 | [1270.0] |



SECTION C-C



SECTION C-C

NOTES:
 1. OPERATING TEMPERATURE: -10°C TO +70°C
 2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 CE2011/65/EU (RoHS DIRECTIVE)

| | | |
|---|--|----------|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (mm) | APPROVALS | DATE |
| OVERALL CABLE LENGTH TOLERANCE: $\pm 1/2$ (305) ± 1 (25) / 0 $\pm 1/2$ (305) $\pm 1/2$ (127) $\pm 1/2$ (127) $\pm 1/2$ (127) / 0 $\pm 1/2$ (305) $\pm 1/2$ (127) $\pm 1/2$ (127) $\pm 1/2$ (127) / 0 $\pm 1/2$ (305) $\pm 1/2$ (127) $\pm 1/2$ (127) $\pm 1/2$ (127) / 0 $\pm 1/2$ (305) $\pm 1/2$ (127) $\pm 1/2$ (127) $\pm 1/2$ (127) / 0 | DRAWN BY S.JI | 06/07/17 |
| ALL OTHER DIMENSIONAL TOLERANCES: $\pm .005$ (0.127) $\pm .005$ (0.127) $\pm .005$ (0.127) | CHECKED BY B.ZHANG | 06/07/17 |
| PROJECTION | APPROVED BY S.PAN | 06/07/17 |
| | CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY | |
| | COLOR VARIATIONS MAY OCCUR | |

L-com Global Connectivity 50 HIGH STREET NORTH ANDOVER, MA 01845

CATEGORY: **USB**

PRODUCT DESCRIPTION: **USB3.0 A-F PNL MNT/90DN A-M SHLD**

| SIZE | FSCM NO. | DWG. NO. | REV. |
|----------|--------------|-----------------|----------|
| B | 43321 | U3A00034 | A |

SCALE: NONE CAD FILE: U3A00034.SLDRAW SHEET 1 OF 1