


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	05/23/18	S.LI

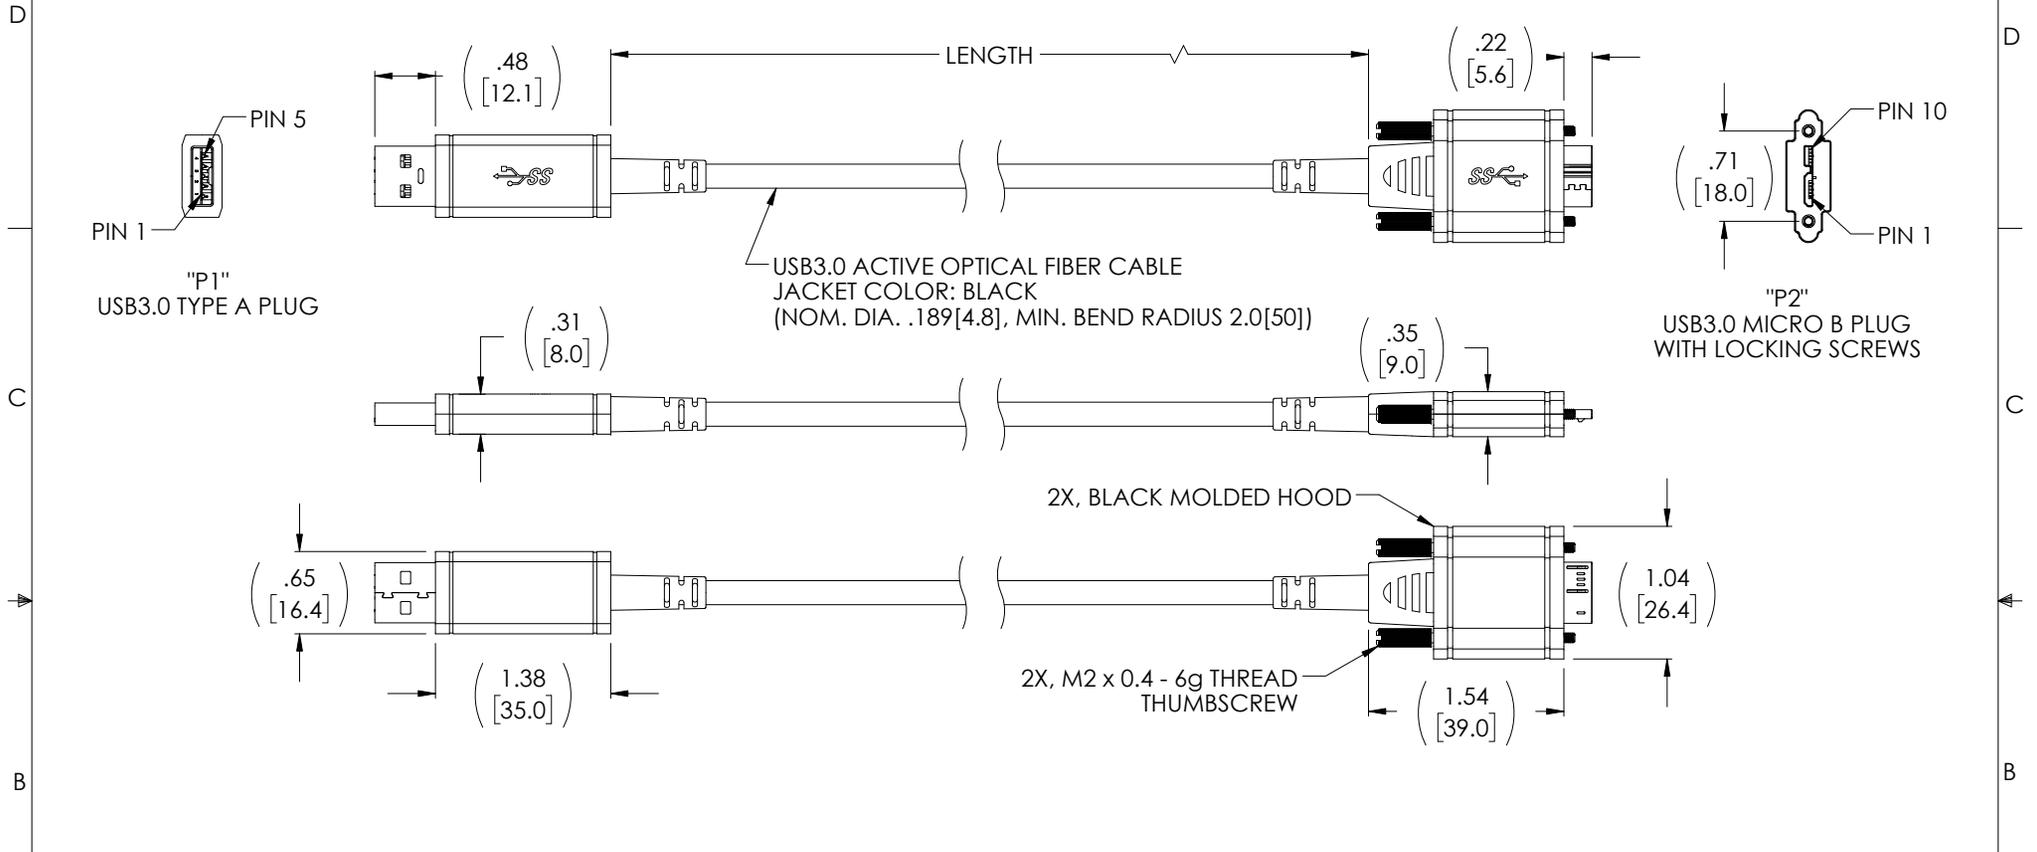

USB3.0 ACTIVE OPTICAL FIBER CABLE  
 JACKET COLOR: BLACK  
 (NOM. DIA. .189[4.8], MIN. BEND RADIUS 2.0[50])

**SPECIFICATIONS:**

1. SUPPLY VOLTAGE: 4.75~5.25V
2. SUPPLY CURRENT: <200mA
3. POWER DISSIPATION: 0.94W
4. CURRENT TO DEVICE: 900mA
5. TEMPERATURE: 0~50 °C
6. HUMIDITY: 15~85% RH
7. PRESSURE: 700~1060hPA

PART NUMBER	LENGTH METERS [FEET]
U3A00107-10M	10.0 [32.81]
U3A00107-20M	20.0 [65.62]

**NOTES:**

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
 CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [5.1] .XXX = ±.005 [1.3]	APPROVALS DRAWN BY S.LI CHECKED BY B.ZHANG APPROVED BY B.GATES	DATE 05/04/18 05/04/18 05/04/18	50 HIGH STREET NORTH ANDOVER, MA 01845
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY USB
	COLOR VARIATIONS MAY OCCUR		PRODUCT DESCRIPTION AOC USB3.0 A TO MICB W/ LOCKING SCREWS
	PROJECTION 	SIZE <b>A</b>	FSCM NO. <b>43321</b>
SCALE: NONE		CAD FILE: U3A00107.SLDDRW	REV. <b>A</b>