




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	DRAWING REPLACES UAD012FF-OD1 AT REV E	11/19/14	D. CASTRO



SERIES "B" USB JACK  
J1

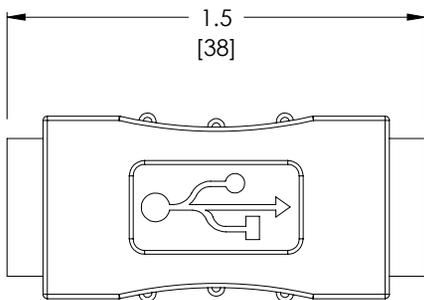

SERIES "B" USB JACK  
J2

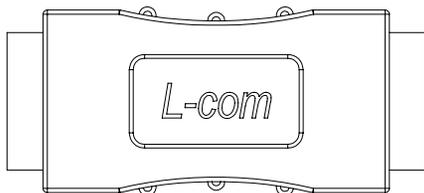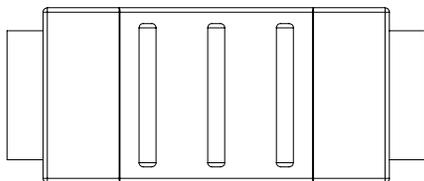

WIRE MAP	
"J1"	"J2"
1	1
2	2
3	3
4	4
GRD	GRD

**NOTES:**

**MATERIALS:**

OVERMOLD: PVC  
CONTACTS: BRASS  
INSULATOR: PBT, UL94V-0

**FINISH:**

SHELL: NICKEL SILVER  
CONTACTS: GOLD OVER NICKEL

**ELECTRICAL:**

CURRENT RATING: 3 AMP  
DIELECTRIC STRENGTH: 1000V AC FOR ONE MINUTE  
INSULATOR RESISTANCE: 1000Ω MIN AT 500V DC

**MISCELLANEOUS:**

ADAPTER SHALL BE USB 2.0 COMPLIANT  
ALL DIMENSIONS ARE FOR REFERENCE ONLY.  
ADAPTER SHALL BE TESTED FOR CONTINUITY.  
ADAPTER SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**

CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY C.MCCORMICK	12/20/2002		CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [.51] .XXX = ± .005 [0.13]	CHECKED BY D.PARHAM	12/20/2002	PRODUCT DESCRIPTION	
	APPROVED BY R.CARRICK	12/20/2002	ADPT, USB B-F/B-F	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>
			DWG. NO. UAD012FF	REV. <b>A</b>
			SCALE: NONE	CAD FILE: UAD012FF.SLDDRW
			SHEET 1 OF 1	