

6

5

4



3

2



1

REVISION



ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
B5	D	ECO-13168	09/10/2013	AKRESOWSKI	RCARLESCO

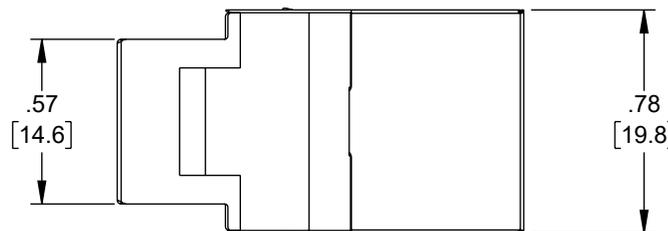RECOMMENDED
PANEL CUTOUT

WIRING MAP

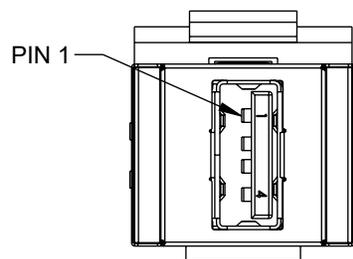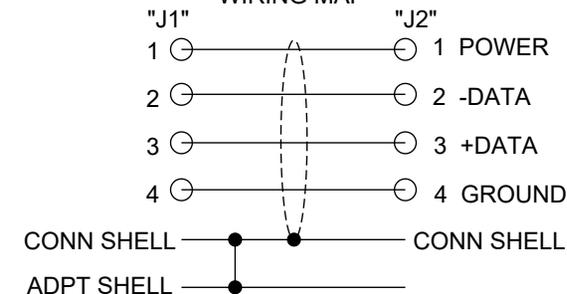

"J1"
2X USB TYPE A JACK
30 μINCH SELECTIVE GOLD PLATED CONTACT
NICKEL PLATED SHELL

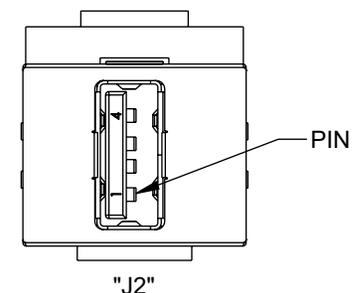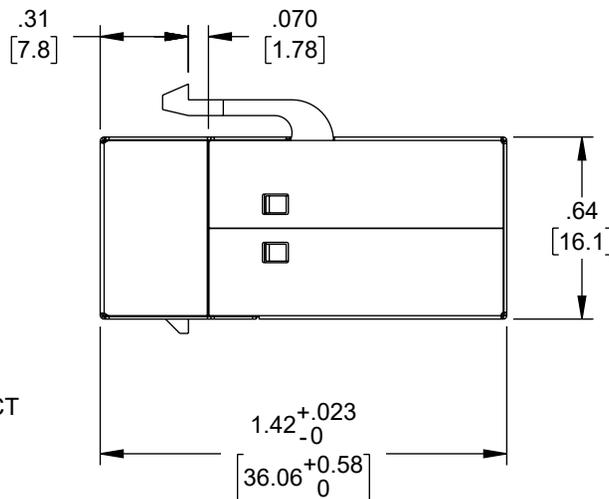

"J2"

NOTES:

1. ADAPTER HOUSING: ABS, UL94V-0 RATED
2. ADAPTER SHIELDING: STAINLESS STEEL
3. PCB: GLASS FIBER EPOXY; FR-4, UL94 V-0
4. USB CONNECTORS MEET USB2.0 STANDARD
5. OPERATING TEMPERATURE: -20°C~+60°C
6. ADAPTER SHALL BE TESTED FOR CONTINUITY.
7. ADAPTER SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE: CE2011/65/EU (RoHS DIRECTIVE)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS


TOLERANCES:
 .X = ±.2 [5] FRACTIONS
 .XX = ±.02 [0.5] ± 1/32
 .XXX = ±.005 [0.13] ANGLES ± 1°

CABLE LENGTH TOLERANCES:
 ≤12 [305] = +1 [25] / -0
 >12 [305] ≤ 60 [1524] = +2 [51] / -0
 >60 [1524] ≤ 120 [3048] = +4 [102] / -0
 >120 [3048] ≤ 300 [7620] = +6 [152] / -0
 >300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE.
UN-DIMENSIONED/NON-CRITICAL FEATURES
MAY VARY IN SIZE AND LOCATION
COLORS MAY VARY

L-com
an INFINIT@ brand

Website: www.L-com.com
Phone: 1.800.341.5266 | 1.978.682.6936



INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5

SCALE	SHEET
NONE	1 OF 1

DESCRIPTION

ADPT, USB KEYSTONE A-A

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	43321	DFRISIELLO	UADKEY-AA	D

6

5

4

3

2

1