


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/15/2011	DGUTTADAUR
B	ECN 9840: REVISED COUPLER AND DRAWING FORMAT	05/03/2019	DGUTTADAUR

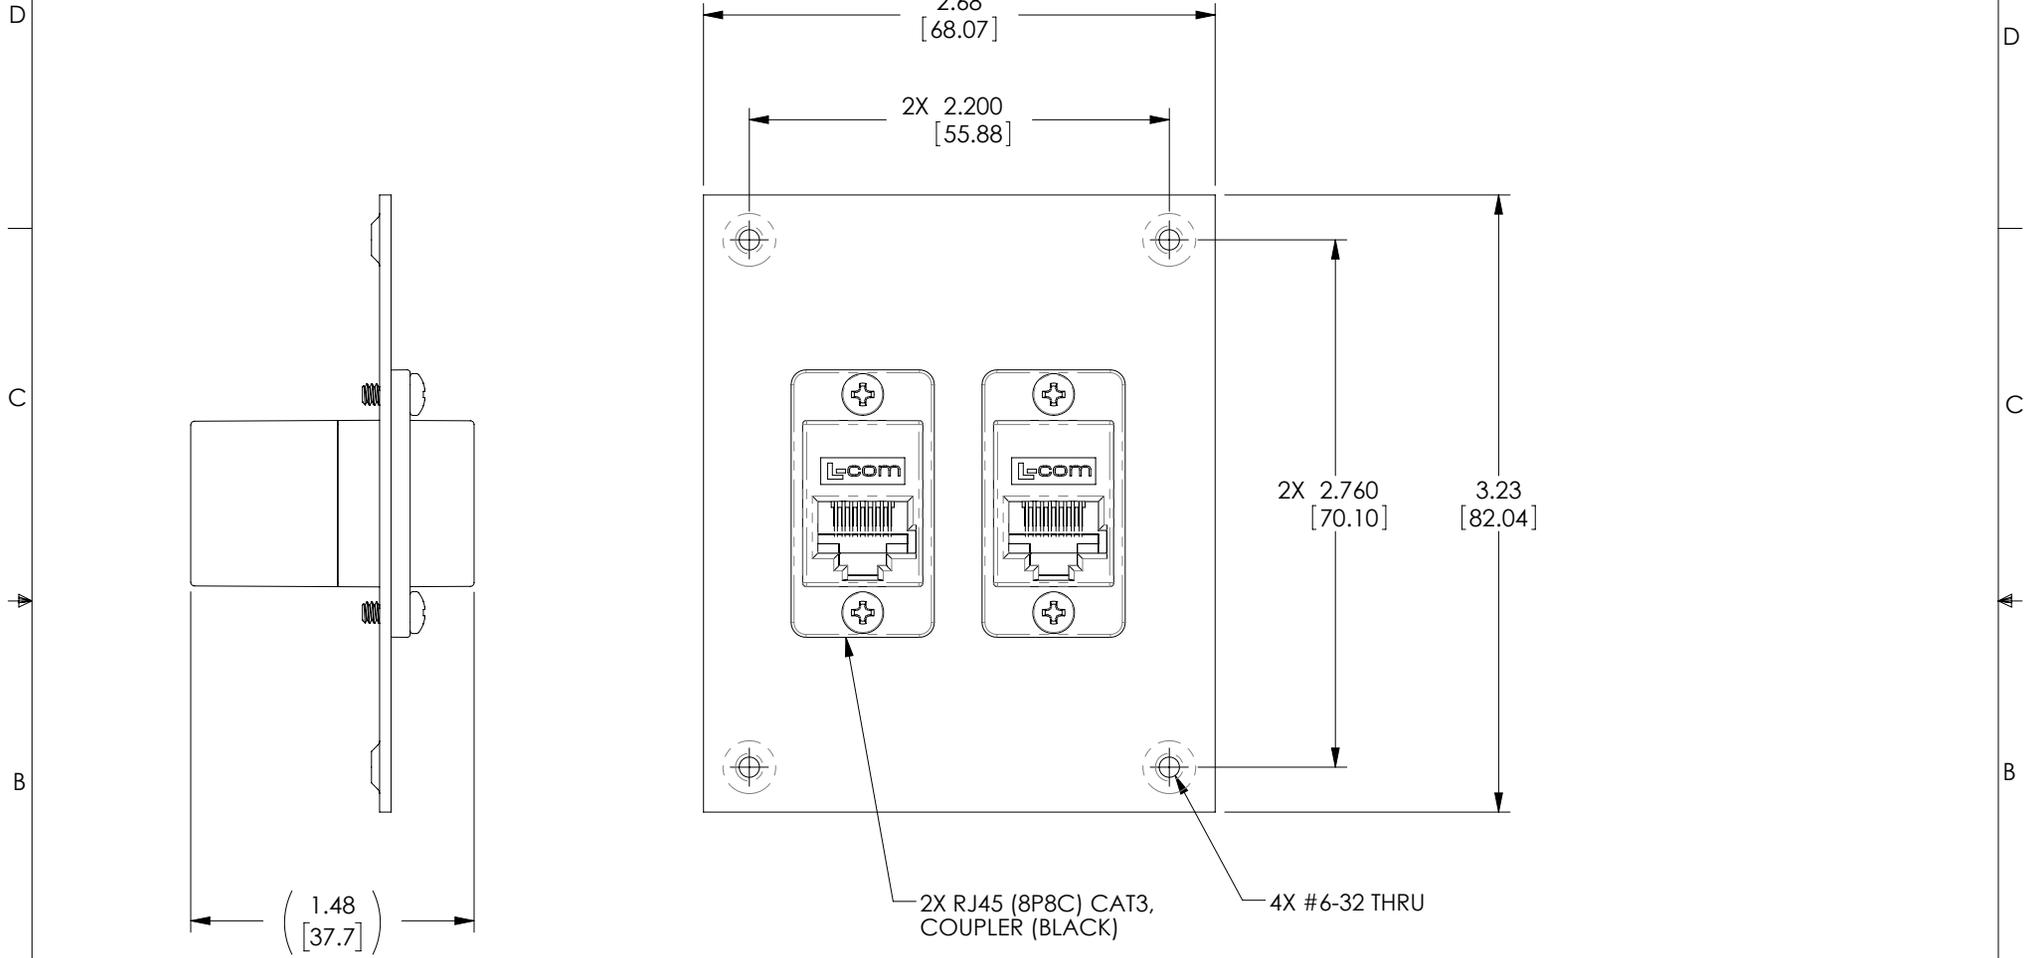

NOTES:

1. PANEL MATERIAL: .06 THICK COLD ROLLED STEEL.
2. PANEL FINISH: FLAT BLACK POWDER COAT.
3. PANEL IS SHIPPED WITH (4) #6-32 MOUNTING SCREWS (NOT SHOWN).
4. PANEL IS INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPEC. PS-0031

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY D.CASTRO	09/14/2011		CATEGORY TELECOM/MODULAR
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [.51] .XXX = ±.005 [0.13]	CHECKED BY DFRISIELLO	09/15/2011	PRODUCT DESCRIPTION USP SUB-PNL/2 RJ45K KEYED CPL STR BK	
	APPROVED BY MMARTINEZ	09/15/2011	SIZE A	FSCM NO. 43321
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		DWG. NO. USP2ECFB8SKB	REV. B
COLOR VARIATIONS MAY OCCUR		SCALE: NONE CAD FILE: USP2ECFB8SKB.SLDDRW SHEET 1 OF 1		