

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	10/26/2018	JYOU






Notes:

Electrical:
 Impedance: 75 ohm
 Frequency Range: 0~12 GHz.
 Voltage Rating: ≥500 V rms.
 (depending on cable)
 Insulator Resistance: ≥5 GΩ
 Dielectric Withstanding Voltage:
 1500V rms.
 Contact Resistance:
 Center Contact ≤1.5mΩ.
 Outer Contact ≤1 mΩ.
 VSWR: < 1.2 (0~12 GHz)

Environmental:
 Temperature Range: -65a to 165a
 Corrosion(Salt Spray): MIL-STD-202, Method 101, Cond. B
 Thermal Shock: MIL-STD-202, Method 107, Cond. B
 Mechanical: MIL-STD-202, Method 213, Cond. G
 Vibration: MIL-STD-202, Method 204, Cond. B

PACKAGING:
 CONNECTOR SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 CE2011/65/EU(RoHS DIRECTIVE)

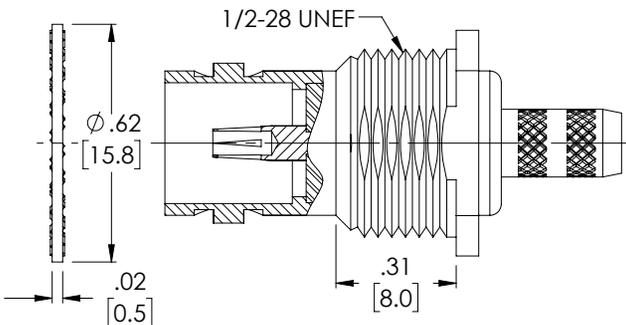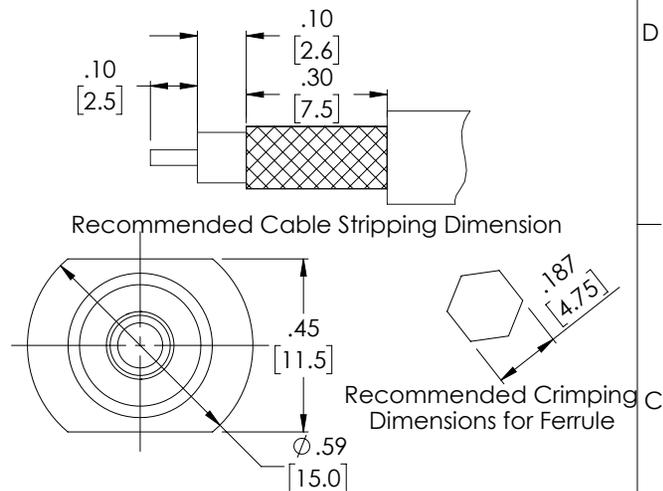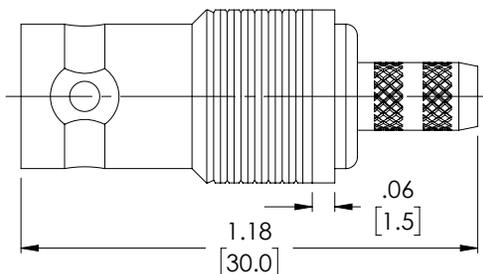

7	Nut	Brass	NICKEL PLATE
6	Washer	Steel	NICKEL PLATE
5	Ferrule	Brass	NICKEL PLATE
4	Inner Contact	Brass	NICKEL/GOLD PLATE
3	Center Contact	BeCu	NICKEL/GOLD PLATE
2	Insulator	PTFE	None
1	Body	Brass	NICKEL PLATE
ITEM	Description	Material	Finish

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	DRAWN BY JYOU	09/19/2018
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ±.005 [1.3]	CHECKED BY BZHANG	09/19/2018
PROJECTION	APPROVED BY SPAN	09/19/2018
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	
	COLOR VARIATIONS MAY OCCUR	

		50 HIGH STREET NORTH ANDOVER, MA 01845	
CATEGORY			
Coaxial			
PRODUCT DESCRIPTION			
BNC B/H Jack, Crimp Type(75ohm) for Belden 1855A Cable			
SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	V7C00015	A
SCALE: NONE	CAD FILE: V7C00015.SLDDRW		SHEET 1 OF 1