
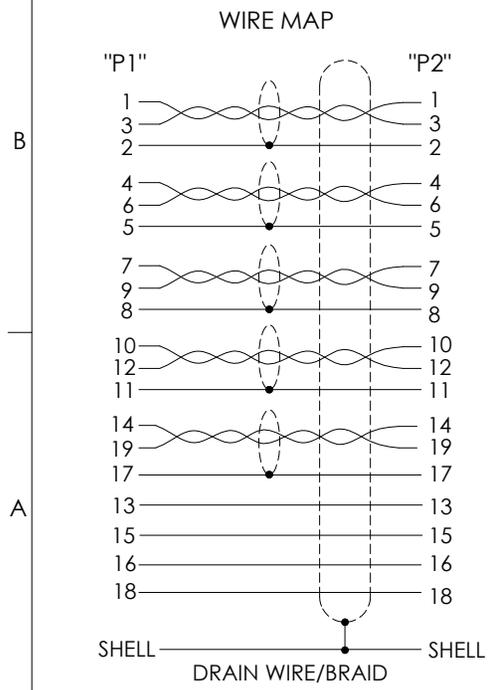


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	10/18/2018	BGATES

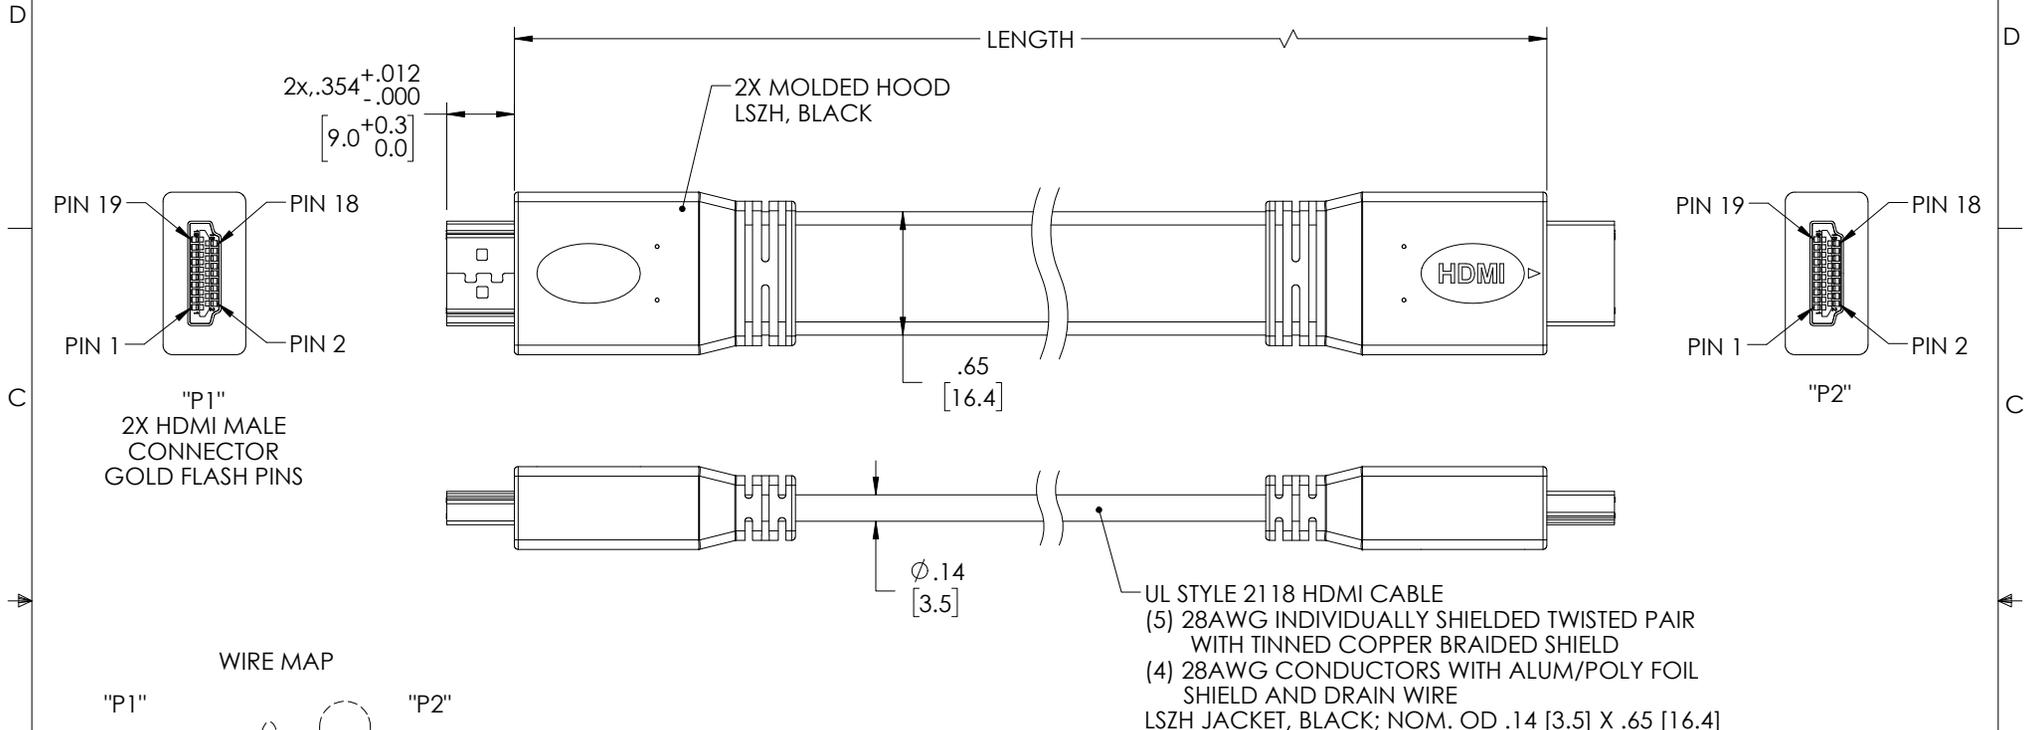

NOTES:

ELECTRICAL:
 VOLTAGE TEST: DC 300V 10ms
 INSULATION RESISTANCE: 5.0M ohm/MIN.
 CONDUCTOR RESISTANCE: 5.0 ohm/MAX.

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.
3. DUST COVERS INSTALLED FOR SHIPPING (NOT SHOWN).

REGULATORY COMPLIANCE:
 CE2011/65/EU (RoHS DIRECTIVE)

UL STYLE 2118 HDMI CABLE
 (5) 28AWG INDIVIDUALLY SHIELDED TWISTED PAIR WITH TINNED COPPER BRAIDED SHIELD
 (4) 28AWG CONDUCTORS WITH ALUM/POLY FOIL SHIELD AND DRAIN WIRE
 LSZH JACKET, BLACK; NOM. OD .14 [3.5] X .65 [16.4]

MODEL NUMBER	LENGTH METERS [FEET]	TOLERANCE INCHES[MM]
VHA00016-05M	0.5 [1.64]	+1.0[25.0]/-0
VHA00016-1M	1.0 [3.28]	+2.0[51.0]/-0
VHA00016-2M	2.0 [6.56]	+2.0[51.0]/-0
VHA00016-3M	3.0 [9.84]	+4.0[102.0]/-0
VHA00016-4M	4.0[13.12]	+6.0[152.0]/-0
VHA00016-5M	5.0[16.40]	+6.0[152.0]/-0

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [1.27]	APPROVALS	DATE		50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY BZHANG	10/18/2018		CATEGORY
PROJECTION 	CHECKED BY DFRISIELLO	10/18/2018	PRODUCT DESCRIPTION	
	APPROVED BY BGATES	10/18/2018	HDMI LSZH FLAT CABLE MALE TO MALE	
COLOR VARIATIONS MAY OCCUR	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	SIZE A	FSCM NO. 43321	DWG. NO. VHA00016
SCALE: NONE		CAD FILE: VHA00016.SLDDRW		REV. A
				SHEET 1 OF 1