
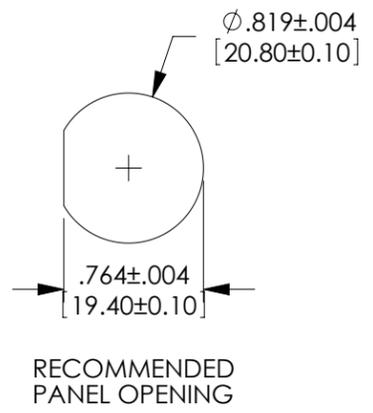
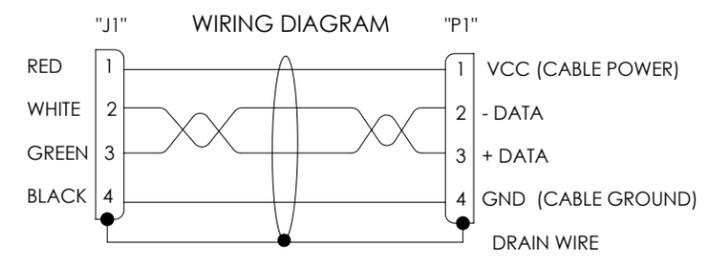
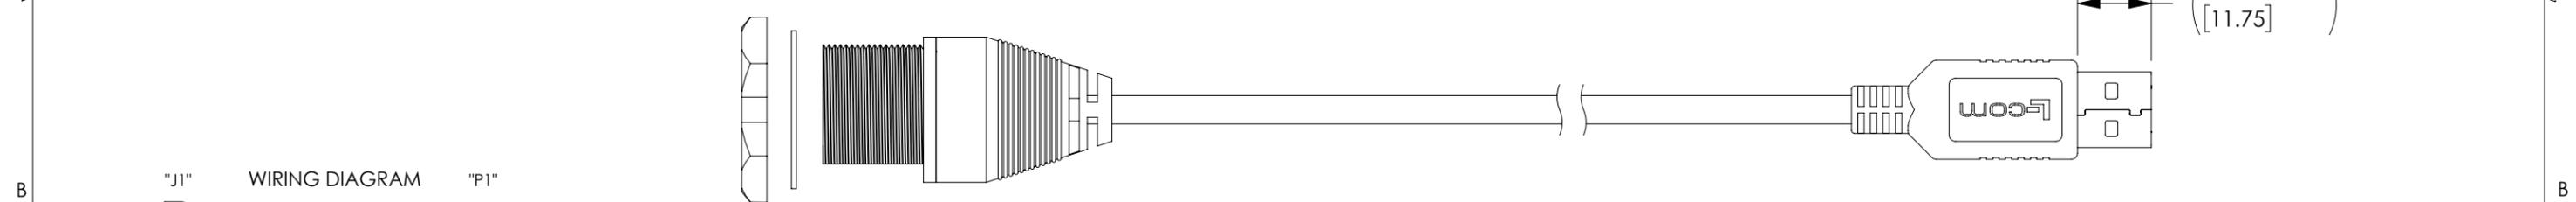
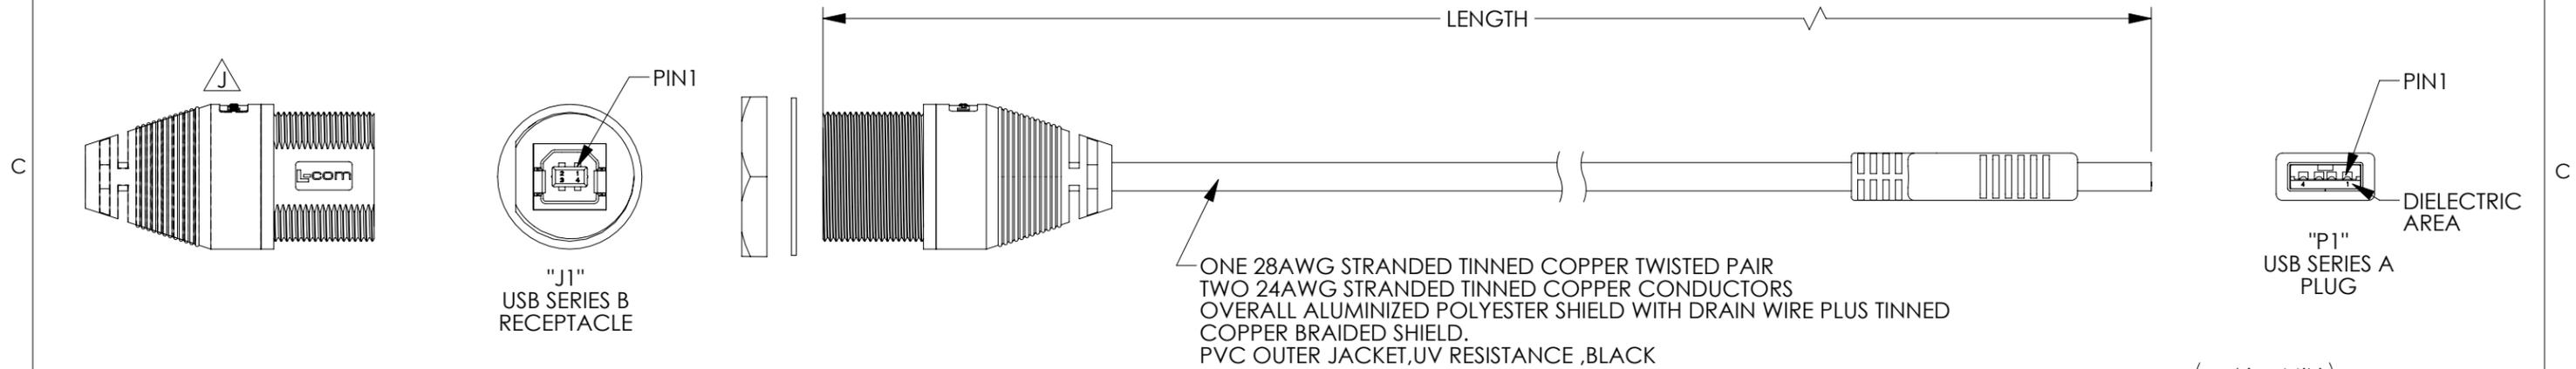


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
J	ECN 9544:ROTATED L-COM LOGO 180°	11/30/2018	DCUI

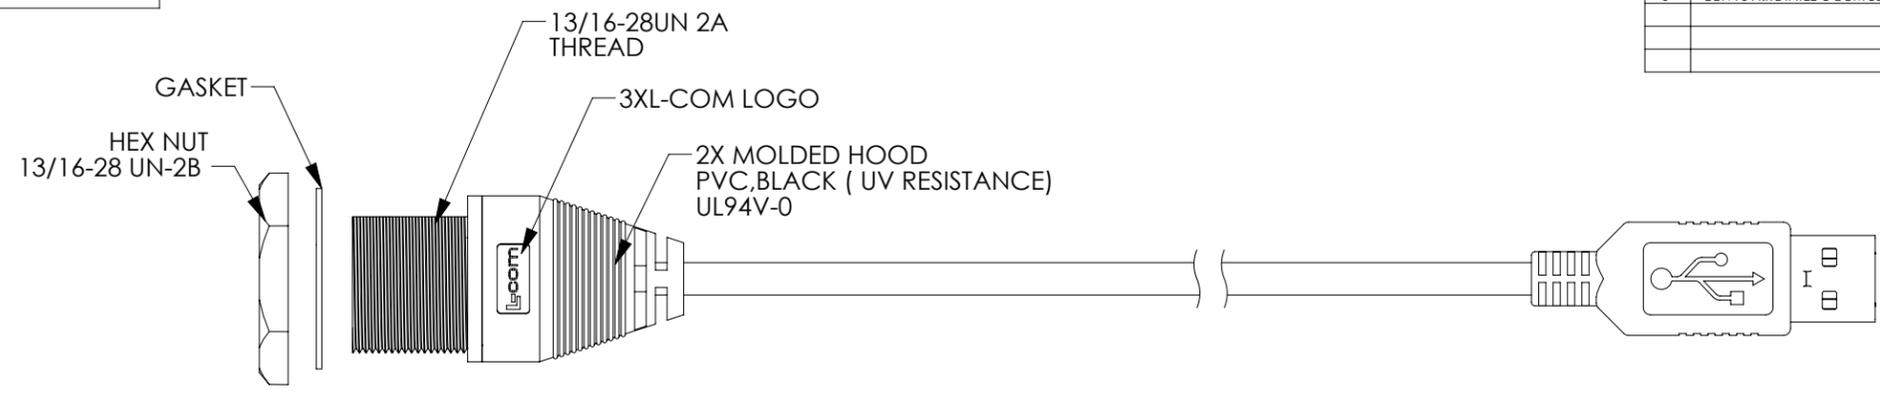

PART NUMBER	LENGTH	
	METER	FEET
WPUSBBA-05M	0.5	1.64
WPUSBBA-1M	1.0	3.28
WPUSBBA-2M	2.0	6.56
WPUSBBA-3M	3.0	9.84
WPUSBBA-5M	5.0	16.41

- NOTES:**
1. THESE CABLE ASSEMBLIES ARE CONSTRUCTED TO MEET THE REQUIREMENTS OF THE UNIVERSAL SERIAL BUS SPECIFICATION USB 2.0.
  2. CONNECTOR CONTACTS HAVE 30 μINCHES GOLD PLATING OVER NICKEL PLATING.
  3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
  4. L-COM LOGO STYLE AND MOLDED HOOD APPEARANCE MAY VARY PER L-COM SPECIFICATION
  5. INGRESS PROTECTION RATING IS IP67 (J1 ONLY ,MATED)
  6. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]  
OVERALL CABLE LENGTH TOLERANCE:  
≤12 [305] = +1 [25] / -0  
>12 [305] ≤60 [1524] = +2 [51] / -0  
>60 [1524] ≤120 [3048] = +4 [102] / -0  
>120 [3048] ≤300 [7620] = +6 [152] / -0  
>300 [7620] = +5% / -0%  
ALL OTHER DIMENSIONAL TOLERANCES:  
.X = ±.2 [5.08]  
.XX = ±.02 [5.1]  
.XXX = ±.005 [1.3]

APPROVALS	DATE
DRAWN BY J.KIEZULAS	10/31/2005
CHECKED BY M.LAHEY	10/31/2005
APPROVED BY R.CARRICK	10/31/2005

**L-com** Global Connectivity 50 HIGH STREET NORTH ANDOVER, MA 01845

CATEGORY: USB

PRODUCT DESCRIPTION: CBL WTR PRF USBB-F/A-M

SIZE: <b>B</b>	FSCM NO.: <b>43321</b>	DWG. NO.: WPUSBBA	REV.: <b>J</b>
----------------	------------------------	-------------------	----------------

SCALE: 1:1 CAD FILE: WPUSBBA.SLDDRW SHEET 1 OF 1