


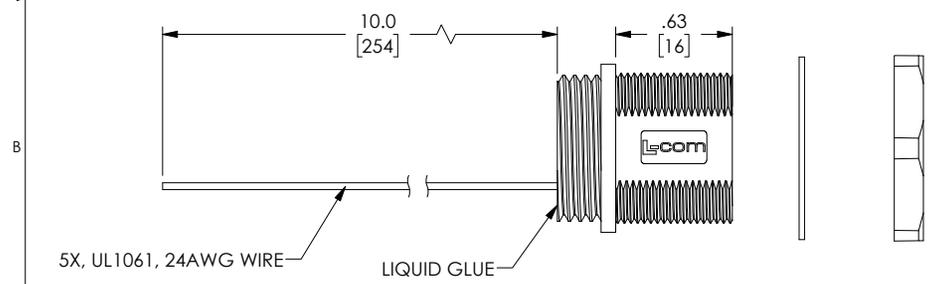
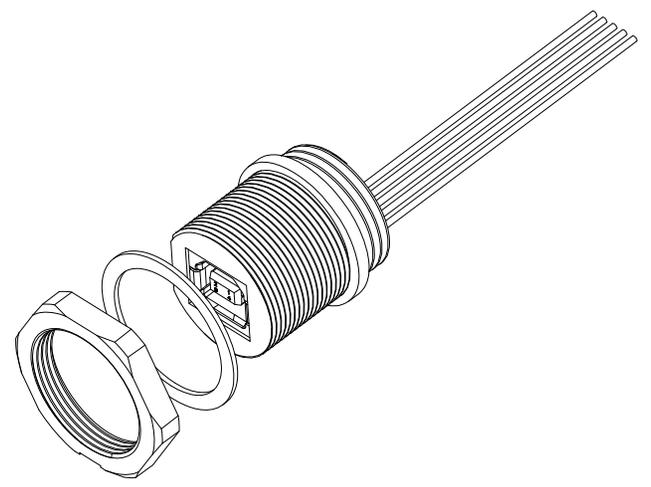


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
H	ECN 11659 ADD NOTE STATING - MAXIMUM SUGGESTED TORQUE VALUE IN	10/2/15/2022	GUTTADAURO
J	ECN 12067: REVISED NOTES, REVISED NOTE 3 (TORQUE), REVISED FORMAT	09/02/2022	GUTTADAURO

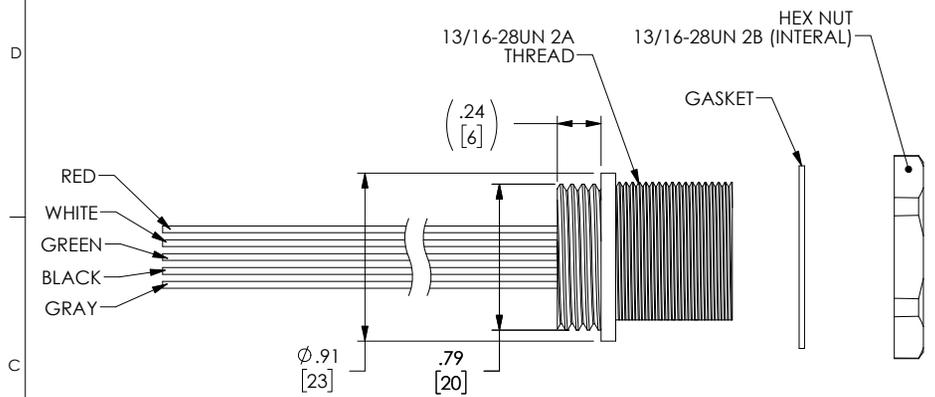

WIRING MAP	
PIN#	COLOR
1	RED (PT 1945C)
2	WHITE (RAL 9003)
3	GREEN (PT 328C)
4	BLACK (PT BLACK 6C)
SHELL	GRAY (PT 421C)



- NOTES:**
1. COMPONENT ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 2. INGRESS PROTECTION RATING IS IP67 (J1 ONLY ,MATED)
 3. SUGGESTED MAX. TORQUE VALUE FOR HEX NUT IS 1.0N-m (8.8 lbf-in)
 4. COMPONENT ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
EU ROHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (mm).	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = ±1 [25] / 0 >12 [305] ≤60 [1524] = ±2 [51] / 0 >60 [1524] ≤120 [3048] = ±4 [102] / 0 >120 [3048] ≤300 [7620] = ±6 [152] / 0 >300 [7620] = ±5% / 0	DRAWN BY C.MCCORMICK	10/31/2005	
ALL OTHER DIMENSIONAL TOLERANCES: .XX = ±.02 [5] FRACTIONS .XXX = ±.005 [13] ANGLES ± 1°	CHECKED BY D.PARHAM	10/31/2005	
	APPROVED BY R.CARRICK	10/31/2005	CATEGORY USB
THIRD-ANGLE PROJECTION	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	PRODUCT DESCRIPTION USB WATERPROOF SERIES B BULKHEAD TO BLUNT END
	SIZE B	CAGE CODE 43321	ITEM NO. WPUSBBF
	SCALE: NONE	CAD FILE: WPUSBBF.SLDORW	REV. J