






THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
E	ECN 8473: JPD DWG TO MATCH NEW DESIGN. ADD MATERIAL & NOTE 3 INFO	09/02/2016	DCUI
F	ECN 8516: JPD NOTES 2&3, JPD CABLE DESCRIPTION. ADD A VIEW	10/20/2016	DCUI
G	ECN 12067: REVISED NOTES AND FORMAT. ADDED NOTE 2, REMOVED -SM	09/04/2022	GUITTADAURO

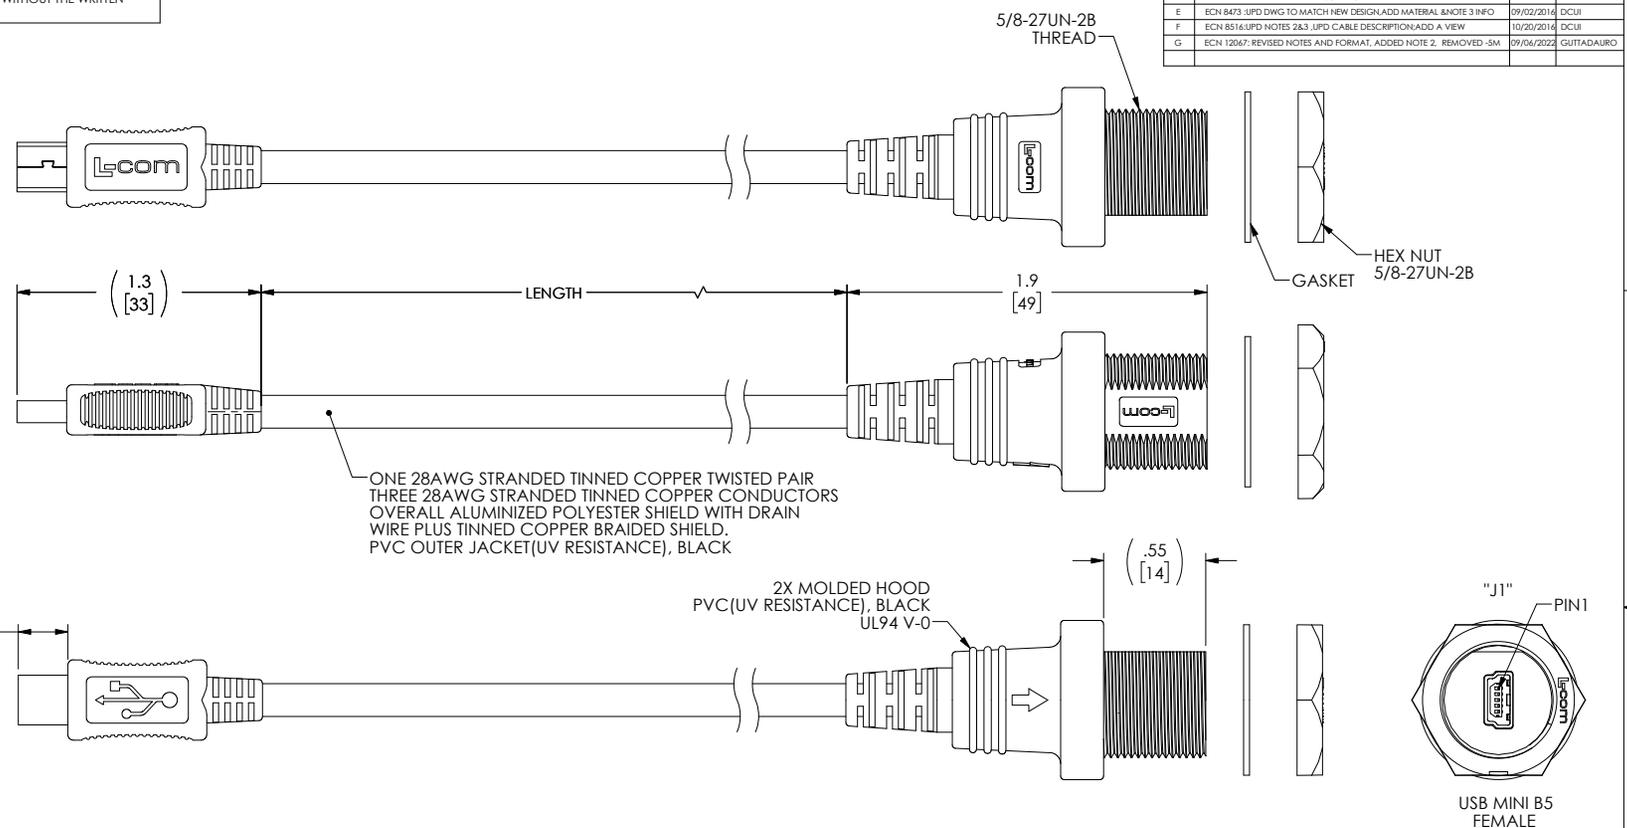

PART NUMBER	LENGTH	
	FEET	METERS
WPUSBMB5X-03M	.98	[.3]
WPUSBMB5X-05M	1.64	[.5]
WPUSBMB5X-1M	3.28	[1.0]
WPUSBMB5X-2M	6.56	[2.0]

- NOTES:**
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY
 - SUGGESTED MAX. TORQUE VALUE FOR HEX NUT IS 0.4N-m (3.5 lbf-in)
 - INGRESS PROTECTION RATING IS IP67 (J1 ONLY ,MATED)
 - CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031
- REGULATORY COMPLIANCE:**
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (mm). OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .3X = ±.2 [5] FRACTIONS ± 1/32 .XX = ±.02 [0.5] ± 1/32 .XXX = ±.005 [0.13] ANGLES ± 1°	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	DRAWN BY D.CASTRO	04/17/2009	
CHECKED BY D.FRISIELLO	04/20/2009	PRODUCT DESCRIPTION CA WTR PR USBMB5-F/MB5-M	
APPROVED BY S.S.MITH	04/20/2009	SIZE B	CAGE CODE 43321
THIRD-ANGLE PROJECTION	COLOR VARIATIONS MAY OCCUR	ITEM NO. WPUSBMB5X	REV G
SCALE: NONE		CAD FILE: WPUSBMB5X.LDDRW	